



HOLDING & DISPLAY CABINETS



*Fresh merchandising ideas for daytime, nighttime
and all of the snack times in between.*





Model FSD-2



Model FSDT-2X with accessory 5-shelf angle rack, decals, and sign holder (sign not included)

FSD

FLAV-R-SAVOR® HUMIDIFIED DISPLAY CABINETS


Choose display cabinets that will work harder for you around the clock. Choose Flav-R-Savor® from Hatco.

Balancing the right combination of heat and humidity, the rugged Flav-R-Savor humidified cabinet keeps food fresh and safe for up to four hours, reducing waste and maintaining the high quality you need to satisfy your customers.

Plus, with a complete range of sizes, door options and rack types, you can select the cabinet that will let you sell more whether it's breakfast, lunch or dinner.

- Keep food hot and fresh at safe temperatures
- Internal fluorescent lighting helps showcase product
- Full cabinet display with tempered glass doors and side panels retains maximum heat
- Heat is diffused throughout cabinet providing gentle, even heat
- Continuous humidity keeps food fresher
- Two-door models offer pass-through convenience

FSDT

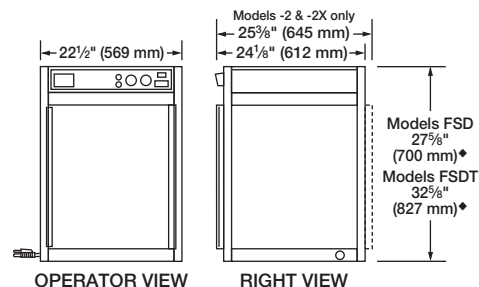


DIMENSIONS

Cabinet Openings: FSD – 19"W x 18 5/8"H (483 x 473 mm).
 FSDT – 19"W x 23 3/4"H (483 x 603 mm).

♦ Add 1" (25 mm) to height for display sign.

Choose a *Designer Color* to match any décor.



Printed colors are a representation and may not exactly match our *Designer* colors. Non-standard colors are non-returnable.

FOOD GRAPHIC DECALS (Adhesive)

Pizza, Chicken, Pretzel, Croissant/Biscuit





MERCHANDISING DISPLAY SIGNS (Requires Sign Holder)



Equipment
 On Signage Program
Hatcographics.com

CONTROLLED MOISTURIZED HEAT KEEPS HOT FOODS FRESH LONGER

The Hatco "operator friendly" control panel makes it easy to set the correct heat and humidity levels. Just fill up the water reservoir with the convenient front-fill cup, then set the humidity to the desired level and the air temperature to the desired temperature (temperature range is 80°-195°F (27°-91°C)). "LO H2O" flashes on the digital display when the water reservoir is low. A Mechanical Thermostat Control with individual dials for temperature and humidity is a factory installed option in lieu of electronic controls.

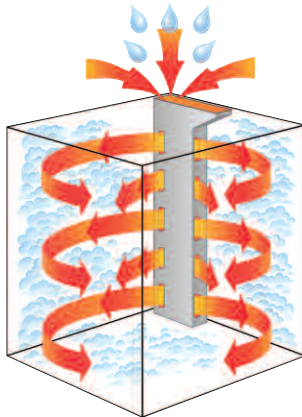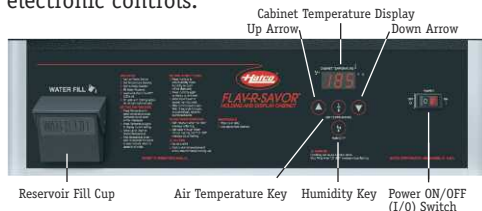

Model FSD-2X with 3-tier pan rack, accessory decals and food pans



Model FSDT-1 with rotating rack motor, 4-tier circle rack, optional Designer color, accessory decals and food pans

SPECIFICATIONS

Standard Models

Model*	Type	Rack Style†	Shipping Weight
FSD-1	1 Door	3-Tier Circle Rack w/Motor	113 lbs. (51 kg)
FSD-1X	1 Door	3-Tier Pan Rack w/o Motor	111 lbs. (50 kg)
FSD-2	2 Doors	3-Tier Circle Rack w/Motor	114 lbs. (52 kg)
FSD-2X	2 Doors	3-Tier Pan Rack w/o Motor	112 lbs. (51 kg)

Tall Models

Model*	Type	Rack Style†	Shipping Weight
FSDT-1	1 Door	4-Tier Circle Rack w/Motor	120 lbs. (54 kg)
FSDT-1X	1 Door	4-Tier Pan Rack w/o Motor	118 lbs. (54 kg)
FSDT-2	2 Doors	4-Tier Circle Rack w/Motor	122 lbs. (55 kg)
FSDT-2X	2 Doors	4-Tier Pan Rack w/o Motor	120 lbs. (54 kg)

* Models FSD-1, FSD-2, FSDT-1 and FSDT-2 include rack motor. Models with "X" designator do not have revolving display and are NOT field retrofittable.

† Rack listed is included with unit. Optional racks available, see Display Rack Selection.

VOLTAGE

120 volts, 60 Hz, 1440 watts, 12 amps (NEMA 5-15P). Export voltages available.

CORD LOCATION

Facing controls, left-hand side panel, lower right corner.

WATER TANK CAPACITY


¾ gallon (3 liters).

WATER QUALITY REQUIREMENTS


Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit. Note: Product failure caused by liming or sediment buildup is not covered under warranty.

DISPLAY RACK SELECTIONS


(Racks shown are for FSD models only)



3-Tier Circle Rack ▲
(Max. 19" Dia. (483 mm) Pans)
(Rack Opening 4 5/8" (117 mm))




3-Tier Pan Rack
(Max. 18" x 13" (457 x 330 mm)
Half-Size Sheet Pans)
(Rack Opening 3 1/2" (89 mm))




5-Shelf Multi-Purpose Rack
(Max. 18" x 13" (457 x 330 mm)
Half-Size Sheet Pans)
(Rack Opening 2 1/2" (64 mm))

DISPLAY RACK SELECTIONS


(Racks shown are for FSDT models only)




4-Tier Circle Rack ▲
(Max. 19" Dia. (483 mm) Pans)
(Rack Opening 4 5/8" (117 mm))




4-Tier Pan Rack
(Max. 18" x 13" (457 x 330 mm)
Half-Size Sheet Pans)
(Rack Opening 3 1/2" (89 mm))




7-Shelf Multi-Purpose Rack
(Max. 18" x 13" (457 x 330 mm)
Half-Size Sheet Pans)
(Rack Opening 2 1/2" (64 mm))



5-Tier Circle Rack ▲
(Max. 19" Dia. (483 mm) Pans)
(Rack Opening 3 7/8" (98 mm))



3-Shelf Angle Rack
(Rack Opening 3 1/2" (89 mm))



3-Tier Pretzel Tree ▲
(Rack Opening 5 1/8" (149 mm))

▲ Requires motorless rack coupling on -X Models


COUNTERTOP

HUMIDIFIED HOLDING & DISPLAY CABINETS

COUNTERTOP

HUMIDIFIED HOLDING & DISPLAY CABINETS

Model FDWD-1 with rotating rack motor, 4-tier circle rack, optional sign holders (signs not included), and accessory food pans

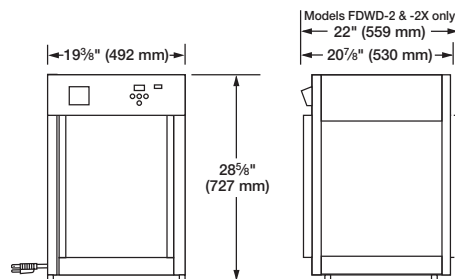

OPERATOR VIEW

RIGHT VIEW

DIMENSIONS

Cabinet Opening: 15 $\frac{3}{4}$ "W x 19 $\frac{3}{4}$ "H (400 x 502 mm).

FDWD

FLAV-R-FRESH® HUMIDIFIED DISPLAY CABINETS

It's time to make a maximum impact on your bottom line using a minimum of counterspace. The compact Flav-R-Fresh® line gives you a profitable way to increase your impulse-buy sales.

- Controlled heat and humidity keeps crisp foods crisp and moist foods moist for hours
- Large single door models provide fast access to food racks
- Two door models offer pass-through convenience
- A variety of racks add flexibility and merchandising appeal
- Ideal for restaurants, pizzerias, convenience stores, concession stands, snack bars and kiosks



Model FDWD-2X with standard 4-shelf multi-purpose rack


Equipment
On Signage Program
Haticographics.com

FOOD AND GRAPHIC DECALS (Adhesive)


Pizza, Hot Pizza, Hot Pretzels




DISPLAY RACK SELECTIONS



4-Tier Circle Rack ▲
(Max. 15" Dia.
(381 mm) Pans)
(Rack Opening
3 $\frac{1}{4}$ " (83 mm))



**4-Shelf
Multi-Purpose Rack**
(Max. 18" x 13"
(457 x 330 mm)
Half-Size Sheet Pans)
(Rack Opening
3 $\frac{3}{4}$ " (95 mm))



3-Tier Pretzel Tree ▲
(Rack Opening
5 $\frac{1}{8}$ " (149 mm))

▲ Requires motorless rack coupling on -X Models

SPECIFICATIONS

Model*	Type	Rack Style	Shipping Weight
FDWD-1	1 Door	4-Tier Circle Rack† w/Motor	90 lbs. (41 kg)
FDWD-1X	1 Door	4-Shelf Multi-Purpose Rack w/o Motor	90 lbs. (41 kg)
FDWD-2	2 Doors	4-Tier Circle Rack† w/Motor	90 lbs. (41 kg)
FDWD-2X*	2 Doors	4-Shelf Multi-Purpose Rack w/o Motor	90 lbs. (41 kg)

* Models FDWD-1 and FDWD-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

† Pretzel Rack available as substitute for Circle Rack.

* Accommodates half-size sheet pans.

VOLTAGE

120 volts, 60 Hz, 1390 watts, 11.6 amps (NEMA 5-15P).

Export voltages available.

CORD LOCATION

Facing controls, left-hand side panel, lower right corner.

WATER TANK CAPACITY

$\frac{1}{2}$ gallon (2 liters).

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

Choose a *Designer Color* to match any décor.



Warm Red



Black



Gray Granite



White Granite



Navy Blue



Hunter Green




Antique Copper

Printed colors are a representation and may not exactly match our Designer colors. Non-standard colors are non-returnable.

SPECIALTY COUNTERTOP

CONVECTED AIR CURVED FRONT DISPLAY CASE

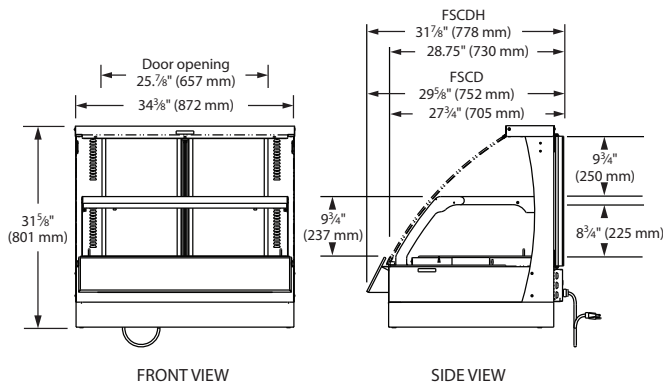

Model FSCDH-2PD in standard *Designer Black*, sign holder (sign not included), three-sided skirt, perforated shelf, and Swanstone® Night Sky base. Also with accessory risers and food pans.

DIMENSIONS

Shelf Dimensions:

Upper: 31 3/4\"W x 16\"D (806 x 406 mm).

Lower: 32 1/4\"W x 19 3/4\"D (819 x 502 mm).

SPECIFICATIONS

Model	Type	Shipping Weight
FSCD-2PD	Non-Humidified	184 lbs. (84 kg)
FSCDH-2PD	Humidified	190 lbs. (86 kg)

MODELS SHIPPED WITH

Perforated upper shelf, heated Swanstone® base shelf, three-sided skirt, and sign holder on bottom front. (Sign not included, recommended sign dimensions 33 1/8\"W x 6\"H (841 x 152 mm).

VOLTAGE

FSCD-2PD: 120 volts, 1800 watts, 15 amps (NEMA 5-20P).

FSCDH-2PD: 120/208-240 volts, 2805 watts, 13.3 amps (NEMA L14-20P).

CORD LOCATION

Server's side, back center of base, on right of control box.

WATER TANK CAPACITY (Humidified Model only)

7 quarts (6.7 liters).

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.



Accessory circular perforated riser in stainless steel

Equipment
On Signage Program
Haticographics.com

Choose a Swanstone® Color to match any décor.



Gray Granite Bermuda Sand Night Sky Sawgrass

* Simulated Stone

Choose a *Designer* Color to match any décor.



Warm Red Black Gray Granite White Granite Navy Blue Hunter Green Antique Copper

Printed colors are a representation and may not exactly match our *Designer* or Swanstone colors. Non-standard colors are non-returnable.

FLAV-R-SAVOR® CONVECTED AIR, CURVED FRONT DISPLAY CASE

This front-of-the-house curved glass merchandiser utilizes convected air technology for superior holding times. Maintaining peak serving temperatures for unwrapped foods makes this Hatco display case perfect for cafeteria and deli-style service.

- Perforated stainless steel shelf enhances air movement over food products, glass center shelf available in lieu of perforated stainless steel shelf
- Focused lighting enhances your food products
- Hinged, tempered front glass panel tilts forward for easy cleaning
- Easy to read, digital controlled temperature display

FSCD

FSCDH



SPECIALTY COUNTERTOP

HUMIDIFIED

Holding & Display
Cabinets

Model WFST-2X with 4-shelf multi-purpose rack, optional *Designer* color, self-closing sliding doors on front, and accessory food pans



WFST

FLAV-R-SAVOR® HUMIDIFIED LARGE CAPACITY DISPLAY CABINETS

Expecting peak crowds at meal time? Turn to the larger capacity Flav-R-Savor® Wide Display Cabinet. Place hot product straight from the oven directly into the full-view cabinets and increase your impulse sales.

- Holds standard 18" x 26" (457 x 660 mm) sheet pans for efficient kitchen operation
- Multipurpose display rack included
- Optional self-closing sliding doors on front for self-serve applications
- Stacking kit available to maximize floor space and double display capacity

Choose a *Designer* Color to match any décor.



Warm
Red



Black



Gray
Granite



White
Granite



Navy
Blue



Hunter
Green



Antique
Copper

Printed colors are a representation and may not exactly match our *Designer* colors. Non-standard colors are non-returnable.



Equipment
On Signage Program
Hatcographics.com

FOOD AND GRAPHIC DECALS (Adhesive)

Chicken, Ribs, Today's Hot Specials



*Today's
Hot Specials*

DIMENSIONS

Cabinet Opening: 28"W x 21 $\frac{7}{8}$ "H (711 x 556 mm).

SPECIFICATIONS

Model	Type	Rack Style	Shipping Weight
WFST-1X	2 Doors	4-Shelf Stationary	182 lbs. (83 kg)
WFST-2X	4 Doors	4-Shelf Stationary	188 lbs. (85 kg)

VOLTAGE

120 volts, 60 Hz, 1790 watts, 14.9 amps (NEMA 5-15P, NEMA 5-20P – Canada).

Export voltages available.

CORD LOCATION

Facing controls, left-hand side panel, lower right corner.


WATER TANK CAPACITY

$\frac{3}{4}$ gallon (3 liters).

WATER QUALITY REQUIREMENTS


Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

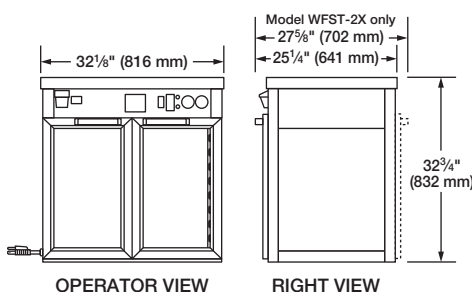

OPERATOR VIEW

RIGHT VIEW

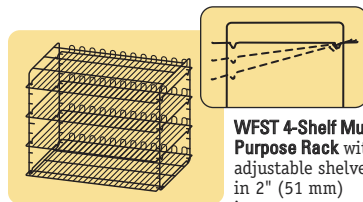

Model WFST-1X with 4-shelf multi-purpose rack and accessory decals and pans



Model WFST-1X operator side

SPECIALTY COUNTERTOP

NON-HUMIDIFIED Holding & Display Cabinets



DIMENSIONS

Cabinet Opening: 44"W x 22"H (1118 x 559 mm).

SPECIFICATIONS

Model	Type	Rack Style	Shipping Weight
LFST-48-1X	2 Doors	3-Shelf Stationary	222 lbs. (101 kg)
LFST-48-2X	4 Doors	3-Shelf Stationary	230 lbs. (104 kg)

VOLTAGE

120/208-240 volts, 2150 watts, 14.6 amps
(NEMA L14-20P).

CORD LOCATION

Facing controls, left-hand side panel, lower right corner.




Model LFST-48-2X with 3-shelf multi-purpose rack, sign holders (signs not included), and optional Designer color

FLAV-R-SAVOR® NON-HUMIDIFIED LARGE CAPACITY DISPLAY CABINETS

When capacity is an issue and humidified heat is not needed, choose the Hatco Large Capacity Display Cabinet. Items such as wraps and sandwiches can be prepared in advance and still stay hot, safe and tasty with this large model. And you will always be ready for your daily rush – whatever time it occurs.

- Perfect for large quantities of wrapped or boxed food
- Sign holders on all four sides for easy personalization (signs not included)
- Holds two standard sheet pans side-by-side on three shelves for increased product visibility and easy accessibility

LFST

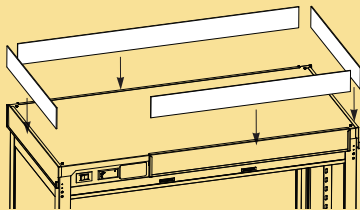

Sign Dimensions

Control Side: 3 1/2"H x 32"W (89 x 813 mm)
Customer Side: 3 1/2"H x 45"W (89 x 1143 mm)
Ends (two): 3 1/2"H x 22 5/8"W (89 x 575 mm)



LFST Cabinet comes with sign holders attached on all four sides, with clear plastic inserts (Signs not included).

Choose a *Designer Color* to match any décor.



Printed colors are a representation and may not exactly match our *Designer* colors. Non-standard colors are non-returnable.

Equipment
On Signage Program
Hatcographics.com

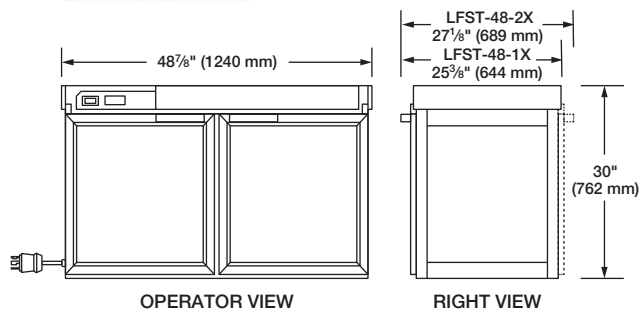


LFST 3-Shelf Multi-Purpose Rack with adjustable shelves in 2" (51 mm) increments

SPECIALTY COUNTERTOP

NON-HUMIDIFIED

Holding & Display
Cabinets

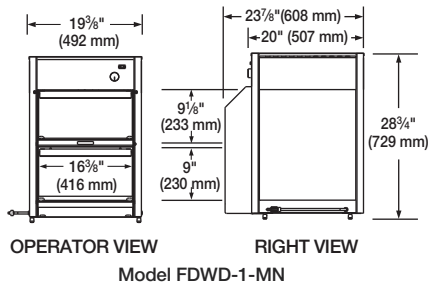

Model FDWD-1-MN



DIMENSIONS

FDWD-1-MN:

Cabinet Openings: Upper Door 16 3/8" W x 9 1/8" H (416 x 233 mm).
 Lower Door 16 5/8" W x 9" H (416 x 230 mm).

FST-1-MN:

Cabinet Openings: Upper Door 18 5/8" W x 11 1/4" H (474 x 285 mm).
 Lower Door 18 5/8" W x 9 7/8" H (474 x 252 mm).

SPECIFICATIONS

Model	Type	Shipping Weight
FDWD-1-MN	2 Doors	99 lbs. (45 kg)
FST-1-MN	2 Doors	132 lbs. (60 kg)

VOLTAGE

FDWD-1-MN: 120 volts, 1080 watts, 9.0 amps (NEMA 5-15P).

FST-1-MN: 120 volts, 1245 watts, 10.4 amps (NEMA 5-15P).

Export voltages available.


CORD LOCATION

Facing controls, left-hand side panel, lower right corner.

PRODUCT CAPACITY

FDW-1-MN: 25 lbs. (11 kg).

FST-1-MN: 40 lbs. (18 kg).

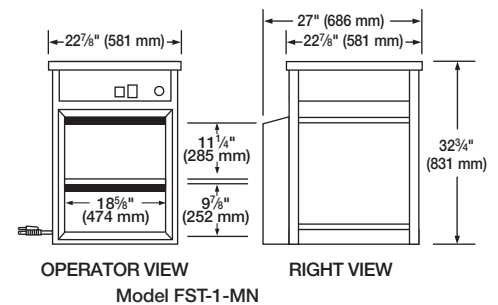

MN


MACHO NACHO® CHIP WARMERS

When it's time for a snack, Macho Nacho® is always ready. Keep your chips hot, crisp and tasty with this specialty warmer and display unit. The unique two-door design allows for first-in, first-out chip delivery. And since Macho Nacho circulates air to prevent the loss of natural oils, you will not need to replace stale chips.

- Hold 25 or 40 pounds (11 or 18 kg) of chips in a very small footprint, reducing refill time
- Two-door access permits easy loading and serving
- Special ductwork forces heat through chips from the bottom up, providing efficient heating




Model FST-1-MN shown in standard bronze

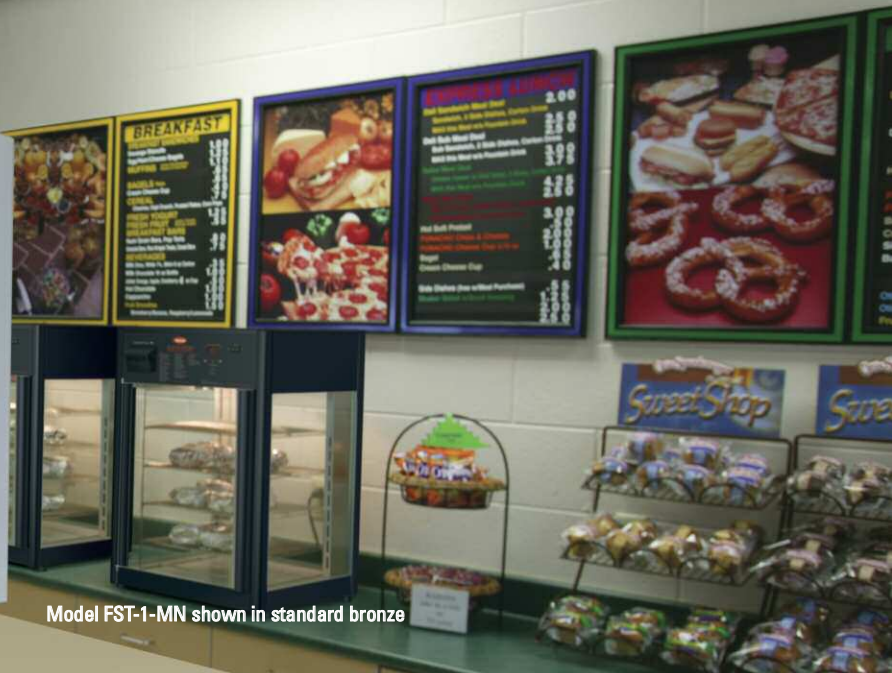

COUNTERTOP

NON-HUMIDIFIED HOLDING & DISPLAY CABINETS

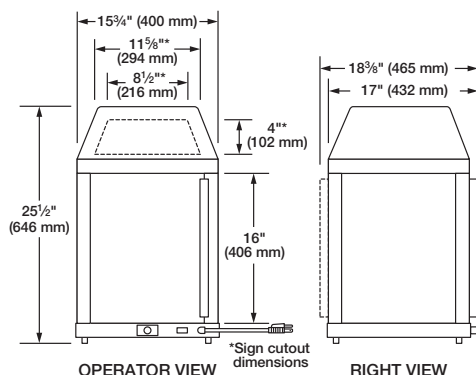

DIMENSIONS

Cabinet Opening: 12 1/2"W x 15 5/8"H (315 x 396 mm).
Trapezoid Shape Sign Holder: 8 1/2"W at top x 4"H x 11 5/8"W at bottom (216 x 102 x 294 mm).

SPECIFICATIONS

Model	Type	Rack Style	Shipping Weight
MDW-1X	1 Doors	3-Shelf Adjustable	46 lbs. (21 kg)
MDW-2X	2 Doors	3-Shelf Adjustable	53 lbs. (24 kg)

VOLTAGE

120 volts, 470 watts, 3.9 amps (NEMA 5-15P).

Export voltages available.

CORD LOCATION

Facing controls, lower right corner.

Choose a *Designer Color* to match any décor.



Model MDW-1X
In *Designer* black with optional hood with backlit sign cutout on one side (sign included)



Magnetically adjustable shelves provide flexibility for a variety of product choices

MINI DISPLAY WARMER NON-HUMIDIFIED DISPLAY CABINETS

Warm cookies. Hot sandwiches. Soft pretzels. Make anytime the right time for these types of items. This non-humidified, compact model keeps them hot and ready for your customers to grab-and-go.

- Merchandising flexibility thanks to magnetically adjustable shelves that allow for slant or horizontal display providing maximum visibility
- Single-door or pass-through models available for server and self-serve operations
- Perfect for locations with limited counterspace

MDW


Model MDW-1X with standard *Designer* color and optional hood with backlit sign cutout on one side (sign included)



PORTABLE

NON-HUMIDIFIED HOLDING & DISPLAY CABINETS

Model PFST-2X
with 8-shelf rack

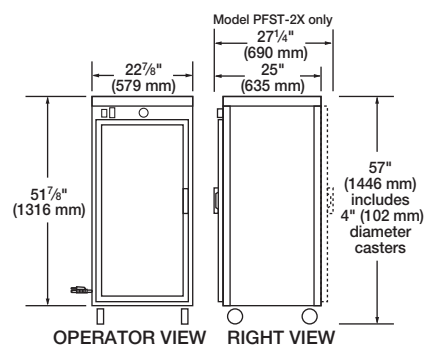

PFST

FLAV-R-SAVOR® TALL NON-HUMIDIFIED HOLDING CABINETS

It's a great time to build your sales volume with the Flav-R-Savor® Non-Humidified Tall Holding Cabinet. With capacity for up to 16 boxed or eight bagged pizzas, you'll have the tools in place to give your customers hot and fresh carryout and delivery pizza.

- Excellent visibility to assure proper delivery rotation
- Illuminated cabinet interior for easy viewing
- Returns to temperature quickly after opening doors to keep pizza hot



DIMENSIONS

Cabinet Opening: 18 3/4"W x 40 3/8"H (476 x 1026 mm).
Available Shelf Space: 17 7/8"W x 17 7/8"D (454 x 454 mm).
Rack Opening: 4 5/8"H (118 mm).

SPECIFICATIONS

Model	Type	Shipping Weight
PFST-1X	1 Door	178 lbs. (81 kg)
PFST-2X	2 Doors	178 lbs. (81 kg)

VOLTAGE

120 volts, 1767 watts, 14.7 amps
(NEMA 5-15P, NEMA 5-20P – Canada).
Export voltages available.

CORD LOCATION


Facing controls, left-hand side panel, lower right corner.

PORTABLE

HUMIDIFIED HOLDING CABINETS



Model FSHC-7W-EE
shown in *Designer Black*,
with optional bumper kit,
and right-hand hinged door

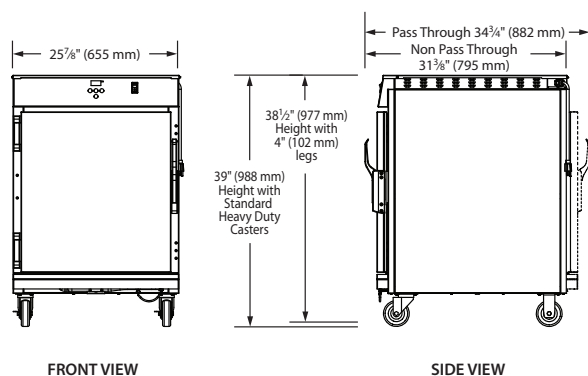

FLAV-R-SAVOR® PORTABLE HUMIDIFIED HOLDING CABINETS

Hatco's NEW energy efficient Flav-R-Savor Portable Holding Cabinets will keep prepared foods at optimum serving temperature and humidity levels for hours while saving money through increased energy efficiencies

- Electronic control with digital read out temperature range of 80° - 200°F (27° - 93°C)
- Proof all types of bread using the lower temperature range of 80° - 100°F (27° - 38°C)
- All 304 stainless steel interior and no element contact with water makes the unit easy to clean

FSHC-7W



Optional glass doors is
not Energy Star qualified

DIMENSIONS

Usable Cavity Space: 20 7/8" W x 26 7/8" D x 20 7/8" H
(532 x 676 x 532 mm).

Top Surface Dimension: 25 3/4" W x 28 1/2" D (654 x 723 mm).

SPECIFICATIONS

Model	Type	Shipping Weight
FSHC-7W1-EE	Single Door	222 lbs. (101 kg)
FSHC-7W2-EE	2-door Pass-Through	226 lbs. (103 kg)

MODELS SHIPPED WITH

6' (1829 mm) cord and plug, 4" (102 mm) diameter casters (with 5 1/8" (130 mm) clearance), stainless steel heavy-duty door with left-hand door hinge, seven sets of adjustable rack slides.

VOLTAGE

120 volts, 60 Hz, 1118 watts, 9.3 amps, (NEMA 5-15P).

CORD LOCATION

Back of unit, upper right side.


WATER TANK CAPACITY

1 gallon (3.8 liters).

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.



Accessory
Extra pan slides



PORTABLE

HUMIDIFIED HOLDING & DISPLAY CABINETS

Model FSHC-7-1 with standard 4" (102 mm) casters, tray slides and accessory food pans




FSHC-7

FLAV-R-SAVOR® LOW PROFILE & PORTABLE HUMIDIFIED HOLDING CABINETS

When it's time for flexibility, turn to Hatco portable cabinets. You'll find the fit that's right for you with the Flav-R-Savor® Low Profile or standard Portable Holding Cabinets. The low profile model is perfect for under work counters and both are easy to maneuver when necessary.

FSHC-6

- Accommodates full sheet pans or Gastronorm pans
- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 6' (1829 mm) cord and plug are standard
- Perfect for serving counters, buffet lines, drive-up windows, point-of-service or preparation areas

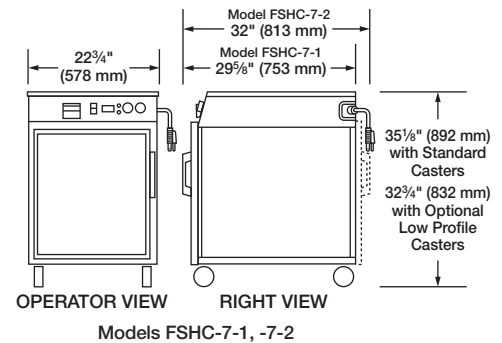

DIMENSIONS

Cabinet Opening: FSHC-7-1, -7-2 – 18 1/2"W x 22"H (470 x 559 mm).
FSHC-6W1, -6W2 – 21 1/2"W x 19"H (546 x 483 mm).

Top Surface: FSHC-7-1, -7-2 – 22 5/8"W x 25 7/8"D (575 x 657 mm).
FSHC-6W1, -6W2 – 25 3/8"W x 25 7/8"D (645 x 657 mm).

SPECIFICATIONS

Model	Type	Rack Style	Shipping Weight
FSHC-7-1	1 Door	Adjustable Angle Slides*	168 lbs. (76 kg)
FSHC-7-2*	2 Doors	Adjustable Angle Slides*	172 lbs. (78 kg)
FSHC-6W1	1 Door	Adjustable Angle Slides*	175 lbs. (79 kg)
FSHC-6W2*	2 Doors	Adjustable Angle Slides*	179 lbs. (81 kg)

* Seven slides on each side standard. Additional slides available. Sheet Pans not included.

▲ FSHC-7-2 and FSHC-6W2 are each a two-door pass-through single cabinet, not two units stacked.

• Six slides on each side standard. Additional slides available. Sheet Pans not included.

VOLTAGE

FSHC-7-1, -7-2: 120 volts, 60 Hz, 1697 watts, 14.1 amps (NEMA 5-15P, NEMA 5-20P – Canada).
FSHC-6W1, -6W2: 120 volts, 60 Hz, 1697 watts, 14.1 amps (NEMA 5-15P, NEMA 5-20P – Canada).
Export voltages available.

CORD LOCATION

Back of unit, upper right side.


WATER TANK CAPACITY

3/4 gallon (3 liters).

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

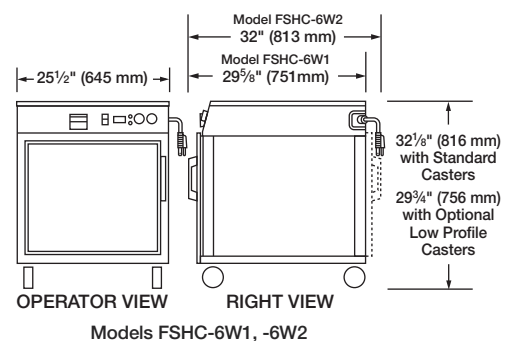


Model FSHC-6W1
with accessory pans



Models FSHC-7-1/FSHC-7-1
with accessory stacking hardware and food pans

PORTABLE

HUMIDIFIED HOLDING & DISPLAY CABINETS

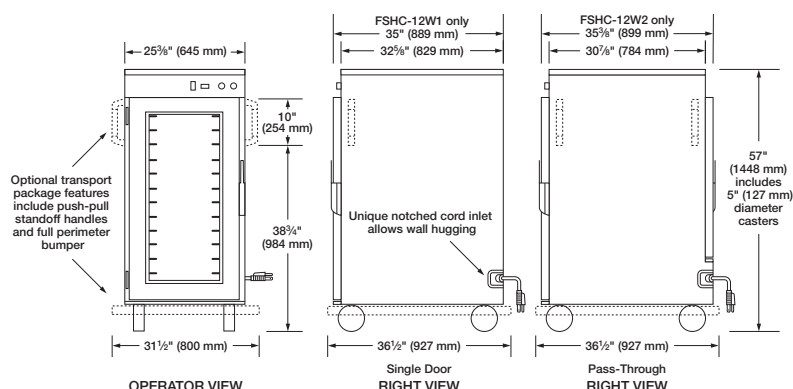

Model FSHC-12W Series



Model FSHC-12W1
with accessory food pans

FLAV-R-SAVOR® TALL HUMIDIFIED HOLDING CABINETS

People want lots of menu choices – yet often don't have time to wait for food to be prepared from start to finish at the time of order. Give your customers more menu choices and hold larger quantities of proven favorites ahead of peak serving periods with these Flav-R-Savor® Tall Humidified Holding Cabinets.

- Hold full sheet or steam table pans
- Two sizes to fit your kitchen's needs
- Models are available with pass-through design
- Dutch doors available on FSHC-17W models
- Temperatures from 90° – 180°F (32° – 82°C) will accommodate proofing

FSHC-12

FSHC-17



Model FSHC-17W1
with accessory food pans

DIMENSIONS

Cabinet Opening: FSHC-12W – 22"W x 41"H (559 x 1041 mm).
FSHC-17W – 22"W x 59"H (559 x 1499 mm).

SPECIFICATIONS

Model	Type*	Rack Style	Shipping Weight
FSHC-12W1	1 Door	Adjustable Angle Slides*	265 lbs. (120 kg)
FSHC-12W2	2 Doors Pass-Through	Adjustable Angle Slides*	295 lbs. (134 kg)
FSHC-17W1	1 Door	Adjustable Angle Slides*	295 lbs. (134 kg)
FSHC-17W1D	1 Opening 2 Dutch Doors	Adjustable Angle Slides*	305 lbs. (138 kg)
FSHC-17W2	2 Doors Pass-Through	Adjustable Angle Slides*	325 lbs. (147 kg)
FSHC-17W2D	4 Dutch Doors Pass-Through	Adjustable Angle Slides*	340 lbs. (154 kg)

* Full view Lexan® doors with full perimeter gaskets.

▲ 12 slides on each side standard. Additional slides available. Sheet Pans not included.

• 17 slides on each side standard. Additional slides available. Sheet Pans not included.

VOLTAGE

120 volts, 60 Hz, 1750 watts, 14.6 amps
(NEMA 5-15P, NEMA 5-20P – Canada).
Export voltages available.

CORD LOCATION

Facing controls, right-hand side panel, lower right corner. Cord length 10' (3048 mm).


WATER TANK CAPACITY

2 gallons (8 liters).

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

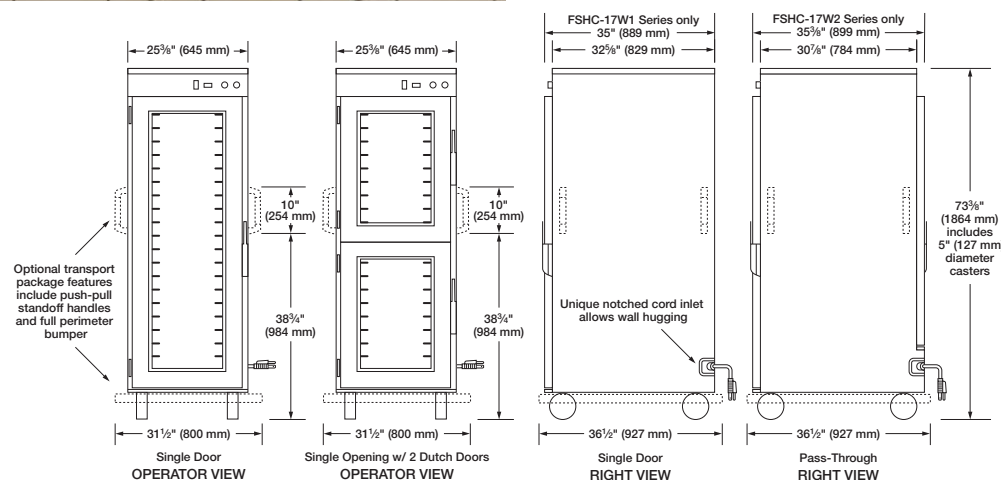


Model FSHC-17W Series

SPECIALTY COUNTERTOP

HEATED AIR CURTAIN Cabinets

Model FS2HAC-2PT
Pass-through with
accessory food pans

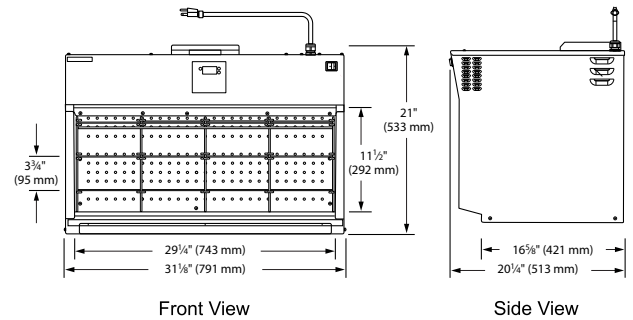

FS2HAC-30

FS2HAC

FLAV-R-SAVOR® NON-HUMIDIFIED HEATED AIR CURTAIN CABINETS

The patented Flav-R-Savor® Heated Air Curtain Cabinet effectively and safely holds hot food hot without the use of doors, allowing immediate access to product. Warm air at the front of the cabinet is forced downward, through the ducts above the opening, forming a "curtain" of heated air. A portion of the heated air is drawn toward the rear of the cabinet, warming each pan.

- Perfect for holding wrapped or sealed product like tortillas, burritos, and ribs, as well as product on sheet pans like biscuits, hamburger patties and baked potatoes
- The 2-pan pass-through accommodates two full-size sheet pans or four half-size sheet pans and the 4-pan unit accommodates four full-size sheet pans or eight half-size sheet pans (FS2HAC-2PT, -4PT models)
- Easy to use digital controls, a lighted On/Off switch, and a 6' cord and plug

DIMENSIONS

Cabinet Opening:

FS2HAC-30 – 29 1/4"W x 11 1/2"H (742 x 292 mm).

FS2HAC-2PT – 18 1/8"W x 8 7/8"H (461 x 206 mm).

FS2HAC-4PT – 18 1/4"W x 16 7/8"H (464 x 410 mm).

SPECIFICATIONS

Model	Type	Shipping Weight
FS2HAC-30	Open Cavity Warmer	105 lbs. (48 kg)
FS2HAC-2PT	2-Tier Pass-Through	165 lbs. (75 kg)
FS2HAC-4PT	4-Tier Pass-Through	190 lbs. (86 kg)

VOLTAGE

FS2HAC-30: 120 volts, 60 Hz, 1744 watts, 14.5 amps (NEMA5-15P, NEMA 5-20P – Canada)

FS2HAC-2PT: 120/208 or 120/240, 60 Hz, 2606 watts, 10.8 amps (NEMA L14-20P)

FS2HAC-4PT: 120/208 or 120/240, 60 Hz, 3378 watts, 14 amps (NEMA L14-20P)

Export voltages available.

CORD LOCATION

FS2HAH-30: Top of unit towards the back, right side.


FS2HAC-2PT, -4PT: Top of unit towards the back, left side.




Model FS2HAC-30
with removable crumb tray and accessory 3 x 4 rack
(shown without 4" (102 mm) legs), pans not available



Model FS2HAC-4PT
Pass-through with accessory food pans
and 4" (102 mm) legs

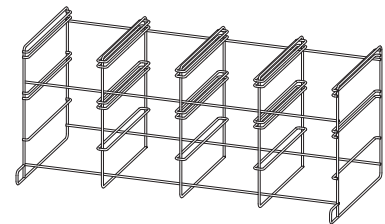


Accessory
3 x 4 pan rack for
the FS2HAC-30 only

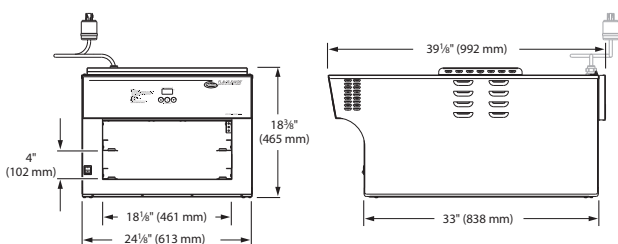


Front View

FS2HAC-2PT




Side View



Front View

FS2HAC-4PT




Side View

SPECIALTY COUNTERTOP

HEATED AIR CURTAIN Cabinets



Model FSHACH-2
with accessory pans

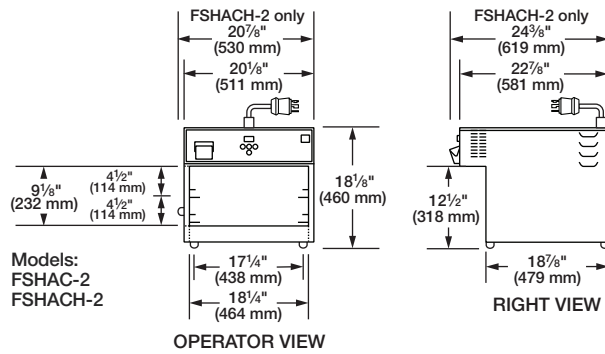

DIMENSIONS

Cabinet Opening

FSHACH-2, FSHACH-2: 18¹/₄"W x 9¹/₈"H (464 x 232 mm).

FSHACH-3, FSHACH-3: 18¹/₄"W x 18¹/₈"H (464 x 460 mm).

FSHACH-2PT: 18¹/₄"W x 9¹/₄"H (464 x 235 mm).

SPECIFICATIONS

Model	Type	Shipping Weight
FSHACH-2	2-Tier	100 lbs. (45 kg)
FSHACH-2	2-Tier Humidified	100 lbs. (45 kg)
FSHACH-3	3-Tier	115 lbs. (52 kg)
FSHACH-3	3-Tier Humidified	115 lbs. (52 kg)
FSHACH-2PT	2-Tier Humidified Pass-Through	150 lbs. (68 kg)

VOLTAGE

FSHACH-2: 120 volts, 60 Hz, 1850 watts, 15.4 amps (NEMA 5-20P).

FSHACH-2, -3: 120/208 volts, 60 Hz, 1877 watts, 9.0 amps (NEMA L14-20P).

FSHACH-2, -3: 120/208 volts, 60 Hz, 2950 watts, 14.2 amps (NEMA L14-20P).

FSHACH-2PT: 120/208 volts, 60 Hz, 4952 watts, 23.8 amps (NEMA L14-30P).

FSHACH-2PT: 208 volts, 60 Hz, 4952 watts, 23.8 amps (NEMA L6-30P).

Export voltages available.

CORD LOCATION

FSHACH-2, -3, FSHACH-2, -3: Top of unit towards the back, middle.

FSHACH-2PT: Top of unit towards the back, left side.

WATER TANK CAPACITY (Humidified Models)

FSHACH-2, -3: 2¹/₄ gallons (9 liters).

FSHACH-2PT: 3 gallons (11 liters).

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

FLAV-R-SAVOR® HUMIDIFIED & NON-HUMIDIFIED HEATED AIR CURTAIN CABINETS

Deliver exactly what your clientele hungers for anytime of the day. The patented Flav-R-Savor® Heated Air Curtain Cabinets give you immediate access to food with no doors to slow you down during your daily rush. Peak rush times can challenge your operation – Hatco helps you meet this demand with ease.

- A "curtain" of heated air is created by warm air being forced downward through ducts above the opening and then drawn towards the back of the unit
- Perfect for wrapped product and product on sheet pans
- Available in sizes to accommodate half-size or full-size sheet pans
- Available in both humidified and non-humidified to match your product offering

FSHAC

FSHACH





Model FSHACH-2PT
Pass-through with accessory pans



Model FSHACH-3



Model:
FSHACH-2PT
(with accessory
4" (102 mm) legs)

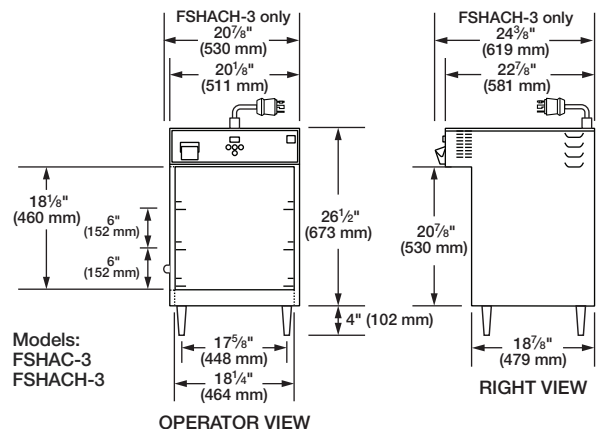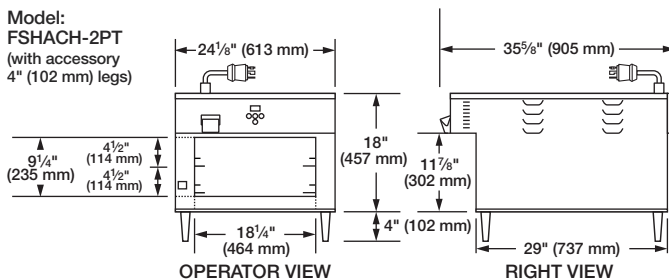




PLUG CONFIGURATIONS


Model	120 Volt 60 Hz	120/208-240 Volt 60 Hz	220 Volt 50/60 Hz	230 Volt 50 Hz	240 Volt 50/60 Hz
FSD/FSDT	NEMA 5-15P	—	CEE 7/7 Schuko	—	BS-1363
FDWD	NEMA 5-15P	—	CEE 7/7 Schuko	—	BS-1363
FSCD	NEMA 5-20P	—	—	—	—
FSCDH	—	NEMA L14-20P	—	—	—
WFST	NEMA 5-15P*	—	CEE 7/7 Schuko	—	BS-1363
LFST	—	NEMA L14-20P	—	—	—
MN	NEMA 5-15P	—	CEE 7/7 Schuko	—	BS-1363
MDW	NEMA 5-15P	—	CEE 7/7 Schuko	CEE 7/7 Schuko, BS-1363	BS-1363
PFST	NEMA 5-15P*	—	CEE 7/7 Schuko	—	BS-1363
FSHC-7WX-EE	NEMA 5-15P	—	—	—	—
FSHC	NEMA 5-15P*	—	CEE 7/7 Schuko	—	BS-1363
FS2HAC-30	NEMA 5-15P*	—	—	—	—
FS2HAC-2PT	—	NEMA L14-20P	CEE 7/7 Schuko	—	BS-1363
FS2HAC-4PT	—	NEMA L14-20P	CEE 7/7 Schuko	—	BS-1363
FSHAC-2	NEMA 5-20P	—	CEE 7/7 Schuko	—	BS-1363
FSHAC-3	—	NEMA L14-20P	CEE 7/7 Schuko	—	BS-1363
FSHACH-2	—	NEMA L14-20P	—	—	—
FSHACH-3	—	NEMA L14-20P	CEE 7/7 Schuko	—	BS-1363
FSHAC-2PT	—	NEMA L14-30P	—	—	—

* NEMA 5-20P for Canada


Colored areas indicate models for export use only.




NEMA 5-15P




NEMA 5-20P




NEMA L14-20P



NEMA L14-30P



CEE 7/7 Schuko



BS-1363

Unique Needs, Exact Solutions.

At Hatco we look, listen, and bring our full experience to your operation. "Customerization" is our brand promise... providing you with foodservice innovations that build your profits. That's Hatco, and that's always good for business.

Contact us today for all of your foodservice equipment needs.



"Nothing less than the best."®

P.O. Box 340500
Milwaukee, WI 53234-0500 USA
(800) 558-0607 (414) 671-6350
www.hatcocorp.com
E-mail: equipsales@hatcocorp.com
Printed in U.S.A.



Form No. HDCB-0407-2
Revised October 2012