



EFFICIENCY FUSED WITH RELIABILITY



VERSATILITY FUSED WITH VALUE



EQUIPMENT FUSED WITH ENVIRONMENT

MB MASTER-BILT®
FUSION™ SERIES

SOLID DOOR REACH-IN REFRIGERATORS & FREEZERS



(does not apply to
MBF23-S & MBF23-SH)



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)	
	L	D*	H*	L	D*	H*									
REFRIGERATORS - FULL DOOR															
MBR23-S	27 ¹ / ₂	33	83 ³ / ₄	699	838	2127	115	7.5	1/3	1	4	23.0	46.1	301/137	
MBR49-S	55 ¹ / ₄	33	83 ³ / ₄	1403	838	2127	115	7.5	1/3	2	8	49.0	88.5	466/212	
MBR72-S	78	33	83 ³ / ₄	1981	838	2127	115	10.0	3/5	3	12	70.0	124.1	636/289	
FREEZERS - FULL DOOR															
MBF23-S	27 ¹ / ₂	33	83 ³ / ₄	699	838	2127	115	8.5	3/5	1	4	23.0	46.1	309/140	
MBF49-S	55 ¹ / ₄	33	83 ³ / ₄	1403	838	2127	115	10.5	4/5	2	8	49.0	88.5	482/219	
MBF72-S	78	33	83 ³ / ₄	1981	838	2127	115	12.0	1	3	12	70.0	124.1	640/291	
REFRIGERATORS - HALF DOOR															
MBR23-SH	27 ¹ / ₂	33	83 ³ / ₄	699	838	2127	115	7.5	1/3	2	4	23.0	46.1	306/139	
MBR49-SH	55 ¹ / ₄	33	83 ³ / ₄	1403	838	2127	115	7.5	1/3	4	8	49.0	88.5	475/216	
MBR72-SH	78	33	83 ³ / ₄	1981	838	2127	115	10.0	3/5	6	12	70.0	124.1	647/294	
FREEZERS - HALF DOOR															
MBF23-SH	27 ¹ / ₂	33	83 ³ / ₄	699	838	2127	115	8.5	3/5	2	4	23.0	46.1	313/142	
MBF49-SH	55 ¹ / ₄	33	83 ³ / ₄	1403	838	2127	115	10.5	4/5	4	8	49.0	88.5	491/223	
MBF72-SH	78	33	83 ³ / ₄	1981	838	2127	115	12.0	1	6	12	70.0	124.1	651/296	

*Depth includes door handle, height includes casters.

1. Stainless steel interior and exterior retains attractive finish longer.

2. Rounded corners create an elegant look while reducing chance of injury from sharp corners in slip-and-fall accidents.

3. Standard heavy-duty vinyl-coated shelves maximize storage ability.



4. Standard heavy-duty casters make it easy to move and clean underneath.

5. Self-contained bottom mount refrigeration system:

- Simple installation with no plumbing required
- Easy access to lower level items inside the reach-in with less risk of back injury
- Because lower shelves are higher, contaminants on the floor are not as likely to enter an open reach-in
- Easy service access
- More inside storage space

7. Standard door features:

- Heavy-duty ergonomic pull handle
- Positive seal and self-closing to keep cold air from escaping
- Hold-open feature for easy loading or removal of items
- Locks to protect stored items



6. Electronic control system:

- Door open alarm helps avoid food spoilage with visible and audible warnings
- Alarm displays every six months as a reminder to clean condenser
- Adjustable temperature set point and defrost frequency
- Rapid freeze mode on freezers to quickly lower temperature
- Error codes to diagnose service issues



GLASS DOOR REACH-IN REFRIGERATORS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D*	H*	L	D*	H*								
MBR23-G	27 ³ / ₈	32 ⁷ / ₈	83 ³ / ₄	695	835	2127	115	7.5	1/3	1	4	23.0	46.1	312/142
MBR49-G	55 ¹ / ₄	32 ⁷ / ₈	83 ³ / ₄	1400	835	2127	115	7.5	1/3	2	8	49.0	88.5	497/226
MBR72-G	78	32 ⁷ / ₈	83 ³ / ₄	1980	835	2127	115	8.5	3/5	3	12	70.0	124.1	675/307

*Depth includes door handle, height includes casters.

1. Stainless steel interior & exterior retains attractive finish longer.

2. Heavy-duty vinyl-coated shelves maximize storage ability.

3. Interior LED lighting for efficient long-lasting service.

4. Standard heavy-duty casters make it easy to move and clean underneath.

7. Standard door features:

- Heavy-duty pull handles
- Positive seal and self-closing to keep cold air from escaping
- Hold-open feature for easy loading or removal of items
- Locks to protect stored items



6. Electronic control system:

- Door open alarm helps avoid food spoilage with visible & audible warnings
- Alarm displays every six months as a reminder to clean condenser
- Adjustable temperature set point and defrost frequency
- Rapid freeze mode on freezers to quickly lower temperature
- Error codes to diagnose service issues

5. Self-contained bottom mount refrigeration system:

- Simple installation with no plumbing required
- Easy access to lower level items inside the reach-in with less risk of back injury
- Because lower shelves are higher, contaminants on the floor are not as likely to enter an open reach-in
- Easy service access
- More inside storage space

GLASS DOOR MERCHANDISERS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H	L	D	H								
REACH-IN SWING DOOR MERCHANDISER														
MBGR70H	78	33*	79 ¹ / ₂	1981	838*	2019	115	11.9	3/5	3	12	72.0	130.9	696/316
COUNTERTOP REFRIGERATOR MERCHANDISER														
MBCTM7-B	21 ¹ / ₄	25 ³ / ₄ *	38	540	654*	965	115	3.1	1/5	1	2	7.0	15.2	132/60
COUNTERTOP FREEZER MERCHANDISER														
MBCTM4-F	23 ⁵ / ₈	24	31 ¹ / ₈	600	610	791	115	3.5	1/4	1	3	3.6	12.0	174/79

*Depth includes door handle(s).

1. Lighted graphic panel for added product attraction.

2. Bright interior lighting calls attention to products.

3. Standard heavy-duty shelves are adjustable for merchandising flexibility.



5. Double pane glass doors have a layer of patented thermal insulation film between layers of glass which provides superior insulation without the weight of triple pane glass.

4. Self-contained bottom mount refrigeration system:

- Simple installation with no plumbing required
- Easy access to lower level items inside the reach-in with less risk of back injury
- Because lower shelves are higher, contaminants on the floor are not as likely to enter an open reach-in
- Easy service access

1. Standard LED lighting for superior product illumination.

2. Durable pull handle holds up to heavy daily usage.

3. Epoxy-coated shelves may be conveniently positioned to fit merchandising needs.



1. Adjustable shelving provides flexible product merchandising.

2. Cold wall refrigeration system allows more storage space.

3. LED lighting around door perimeter for efficient, high quality lighting.

SANDWICH/SALAD PREP UNITS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	NO. OF STANDARD PANS	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D*	H**	L	D*	H**									
SANDWICH/SALAD PREP UNITS															
MBSP27-8A	27 ¹ / ₂	30	43 ³ / ₄	699	762	1111	115	3.6	1/5	1	1	(8) 1/6	7.2	26.3	208/94
MBSP36-10A	36	30	43 ³ / ₄	914	762	1111	115	3.6	1/5	2	2	(10) 1/6	9.9	33.1	261/118
MBSP48-12A	48	30	43 ³ / ₄	1219	762	1111	115	5.2	3/8	2	2	(12) 1/6	13.4	42.7	317/144
MBSP60-16A	60	30	43 ³ / ₄	1524	762	1111	115	5.2	3/8	2	2	(16) 1/6	16.2	52.3	368/167
MBSP72-18A	72	30	43 ³ / ₄	1829	762	1111	115	5.2	3/8	3	3	(18) 1/6	20.4	61.9	426/193
MEGA TOP SANDWICH/SALAD PREP UNITS															
MBSMP27-12A	27 ¹ / ₂	36 ⁷ / ₈	44 ⁵ / ₈	699	937	1133	115	3.6	1/5	1	1	(12) 1/6	7.2	28.27	210/95
MBSMP36-15A	36	36 ⁷ / ₈	44 ⁵ / ₈	914	937	1133	115	3.6	1/5	2	2	(15) 1/6	9.9	35.61	266/121
MBSMP48-18A	48	36 ⁷ / ₈	44 ⁵ / ₈	1219	937	1133	115	5.2	3/8	2	2	(18) 1/6	13.4	45.97	323/147
MBSMP60-24A	60	36 ⁷ / ₈	44 ⁵ / ₈	1524	937	1133	115	5.2	3/8	2	2	(24) 1/6	16.2	56.33	378/172
MBSMP72-30A	72	36 ⁷ / ₈	44 ⁵ / ₈	1829	937	1133	115	5.2	3/8	3	3	(30) 1/6	20.4	66.69	413/188

*Depth includes cutting board on mega top models. **Height includes casters.

1. Stainless steel interior and exterior on all models retains attractive finish longer.

8. Insulated lids on all prep units help maintain food freshness.

7. Drop-in section:

- Fans force cold air into this enclosed area keeping food items stored in pans consistently cold
- A stainless steel divider prevents food spillage into the storage area beneath
- Accommodates 6" deep pans (4" standard)



2. Standard heavy-duty casters make it easy to move and clean underneath.

3. Self-contained refrigeration system:

- Generously-sized system maintains correct temperature for food freshness
- Simple installation with no plumbing required
- Comes with 9 ft. long power cord
- Easy service access

4. Self-closing doors help keep perishables fresh.

5. Standard interior heavy-duty vinyl-coated shelves maximize storage ability.

6. Mega top models have an extra row of pans for added capacity.



PIZZA PREP UNITS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	NO. OF STANDARD PANS	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D*	H**	L	D*	H**									
MBPT44	44 ³ / ₈	36 ¹ / ₂	41 ⁷ / ₈	1127	927	1064	115	6.5	3/8	1	2	(6) 1/3	9.7	43.2	309/140
MBPT67	67	36 ¹ / ₂	41 ⁷ / ₈	1702	927	1064	115	6.5	3/8	2	4	(9) 1/3	17.8	64.4	548/249
MBPT93	93 ¹ / ₄	36 ¹ / ₂	41 ⁷ / ₈	2369	927	1064	115	7.5	1/2	3	6	(12) 1/3	27.2	89.0	698/317

*Depth includes cutting board. **Height includes casters.



1. Stainless steel interior and exterior on all models retains attractive finish longer.

9. Insulated lids help maintain food freshness.

8. Drop-in section:

- Fans force cold air into this enclosed area keeping food items stored in pans consistently cold
- A stainless steel divider prevents food spillage into the storage area beneath
- Accommodates 6" deep pans (4" standard)



2. Standard heavy-duty casters make it easy to move and clean underneath.

3. Standard interior heavy-duty vinyl-coated shelves maximize storage ability.

4. Self-contained refrigeration system:

- Generously-sized system maintains correct temperature for food freshness
- Simple installation with no plumbing required
- Comes with 9 ft. long power cord
- Easy service access

5. Heavy-duty ergonomic pull handles make it easy to open and close doors without twisting your wrists.

6. 1/2" thick, 19" deep reversible cutting board makes a large, durable work space.

7. Standard 1/3 size pans provide easy access to pizza toppings.

UNDERCOUNTERS/WORKTABLES



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H*	L	D	H*								
SOLID DOOR UNDERCOUNTER/WORKTABLE REFRIGERATORS														
MBUR27A	27 ¹ / ₂	30	36	699	762	917	115	3.6	1/5	1	1	7.2	24.8	190/86
MBUR36A	36	30	36	914	762	917	115	3.6	1/5	2	2	9.9	31.2	220/100
MBUR48A	48	30	36	1219	762	917	115	3.7	1/5	2	2	13.4	40.4	255/116
MBUR60A	60	30	36	1524	762	917	115	5.7	3/8	2	2	16.2	49.4	305/138
MBUR72A	72	30	36	1829	762	917	115	5.7	3/8	3	3	20.5	58.5	365/166
SOLID DOOR UNDERCOUNTER/WORKTABLE FREEZERS														
MBUF27A	27 ¹ / ₂	30	36	699	762	917	115	5.2	1/3	1	1	7.2	24.8	195/89
MBUF48A	48	30	36	1219	762	917	115	7.5	1/2	2	2	13.4	40.4	265/120
MBUF60A	60	30	36	1524	762	917	115	7.5	1/2	2	2	16.2	49.4	320/145
GLASS DOOR UNDERCOUNTER/WORKTABLE REFRIGERATORS														
MBURG27A	27 ¹ / ₂	31 ¹ / ₂	36	699	800	914	115	3.6	1/5	1	1	7.2	24.8	190/86
MBURG36A	36	31 ¹ / ₂	36	914	800	914	115	3.6	1/5	2	2	9.9	31.2	220/100
MBURG48A	48	31 ¹ / ₂	36	1219	800	914	115	3.7	1/5	2	2	13.4	40.4	255/116
MBURG60A	60	31 ¹ / ₂	36	1524	800	914	115	5.7	3/8	2	2	16.2	49.4	305/138
MBURG72A	72	31 ¹ / ₂	36	1829	800	914	115	5.7	3/8	3	3	20.5	58.5	365/166

*Height includes casters.

1. Stainless steel interior and exterior on all models retains attractive finish longer.

6. Self-closing doors help keep perishables fresh. Glass door models feature dual pane doors with full-length handles.

5. Long-lasting and efficient LED lighting on glass door models.

4. Standard heavy-duty casters make it easy to move and clean underneath.

3. Front-breathing refrigeration system design allows for zero-clearance installation on sides, back & top.

2. Standard condenser filter screen, removable without tools, for easy condenser coil cleaning resulting in peak efficiency and extended equipment life.



REFRIGERATED DRAWERS & OVERSHELF OPTIONS

Extend the convenience of your Fusion prep unit or undercounter/worktable by adding a single or double overshef or refrigerated drawers.

Refrigerated drawers are available on series MBSP-A, MBSMP-A, MBUR-A (except for MBSP36-10A, MBSMP36-15A & MBUR36A) and MBPT (left and/or center sections only).

Overshelves are available on all MBPT, MBSP-A, MBSMP-A and MBUR-A/MBUF-A models.

To see the entire range of refrigerated drawer options, click on the code at right.



CHEF BASES



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DRAWERS	NO. OF PANS**	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H*	L	D	H*								
MBCB36	36	31	25 ¹ / ₂	914	787	648	115	3.3	1/5	2	(2) full size, (4) 1/4 size	4.9	21.0	182/87
MBCB48	48	31	25 ¹ / ₂	1219	787	648	115	3.3	1/5	2	(4) full size, (4) 1/4 size	8.2	27.5	232/105
MBCB53	53	31	25 ¹ / ₂	1340	787	648	115	3.3	1/5	2	(6) full size	9.8	30.1	230/105
MBCB60	60	31	25 ¹ / ₂	1524	787	648	115	3.3	1/5	2	(6) full size	9.8	31.8	250/114
MBCB72	72	31	25 ¹ / ₂	1791	787	648	115	3.3	1/5	4	(8) full size	14.3	39.4	340/155
MBCB84	84	31	25 ¹ / ₂	2115	787	648	115	6.0	3/8	4	(10) full size	17.2	46.5	355/161
MBCB96	96 ¹ / ₁₆	31	25 ¹ / ₂	2438	787	648	115	6.0	3/8	4	(12) full size	21.4	53.6	390/177

*Height includes casters. **Full size 20³/₄" x 12³/₄" pans. 1/4 size = 10³/₈" x 6³/₈" pans.

1. Stainless steel interior and exterior on all models retains attractive finish longer.

6. Evaporator coils are coated to resist corrosion.


5. Drawer units withstand maximum of 200 lbs. without deflection.



2. Full marine drip guard to prevent spills from dripping over the edge (not applicable on MBCB36).



3. Drawers are supported on stainless steel telescoping slides with stainless steel roller bearing wheels.

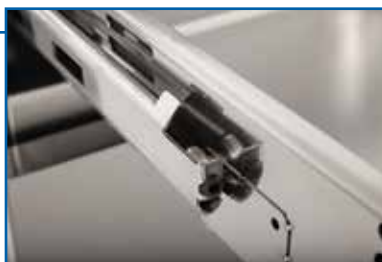

4. Upper and lower drawers accommodate up to 4" deep 12" x 20" pans as well as other sizes when optional horizontal dividers are used (pans not included).



BACK BAR REFRIGERATORS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAPACITY 12 OZ. CANS/ 12 OZ. BOTTLES	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H	L	D	H								
SOLID DOORS														
MBBB59	59	28 ⁷ / ₈	37	1499	733	940	115	6.3	3/8	2	4	1084/498	46.4	276/125
MBBB69	69 ¹ / ₈	28 ⁷ / ₈	37	1756	733	940	115	6.3	3/8	2	4	1299/594	53.8	298/135
MBBB79	80 ³ / ₄	28 ⁷ / ₈	37	2051	733	940	115	6.3	3/8	3	6	1566/714	62.4	400/182
MBBB95	95 ¹ / ₄	28 ⁷ / ₈	37	2419	733	940	115	6.3	3/8	3	6	1875/858	73.7	460/172
GLASS DOORS														
MBBB59-G	59	28 ¹ / ₄	37	1499	718	940	115	6.3	3/8	2	4	1084/498	46.4	289/131
MBBB69-G	69 ¹ / ₈	28 ¹ / ₄	37	1756	718	940	115	6.3	3/8	2	4	1299/594	53.8	320/145
MBBB79-G	80 ³ / ₄	28 ¹ / ₄	37	2051	718	940	115	6.3	3/8	3	6	1566/714	62.4	450/205
MBBB95-G	95 ¹ / ₄	28 ¹ / ₄	37	2419	718	940	115	6.3	3/8	3	6	1875/858	73.7	490/223

1. Stainless steel top for added durability.

6. Standard door locks for added security.

5. Interior LED lighting for efficiency and optimum merchandising.

4. Internal height capacity allows stacking of three longneck beers.



2. Condensate evaporator for easy cleaning and service.

3. Two epoxy-coated shelves per section, adjustable in one-inch increments, maximize merchandising opportunities.



Field interchangeable doors from solid to glass or glass to solid makes refrigerators adaptable to individual merchandising requirements.

SHALLOW DEPTH BACK BAR REFRIGERATORS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAPACITY 12 OZ. CANS/ 12 OZ. BOTTLES	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H	L	D	H								
SOLID DOORS														
MBBB48N	48 ¹ / ₈	26	35 ³ / ₈	1222	660	899	115	6.3	3/8	2	4	714/336	36.9	198/90
MBBB60N	60 ¹ / ₈	26	35 ³ / ₈	1527	660	899	115	6.3	3/8	2	4	966/468	45.5	276/125
MBBB72N	72 ¹ / ₈	26	35 ³ / ₈	1832	660	899	115	6.3	3/8	3	6	1218/588	54.0	320/145
GLASS DOORS														
MBBB48NG	48 ¹ / ₈	26	35 ³ / ₈	1222	660	899	115	6.3	3/8	2	4	714/336	36.9	220/100
MBBB60NG	60 ¹ / ₈	26	35 ³ / ₈	1527	660	899	115	6.3	3/8	2	4	966/468	45.5	298/136
MBBB72NG	72 ¹ / ₈	26	35 ³ / ₈	1832	660	899	115	6.3	3/8	3	6	1218/588	54.0	360/164

1. Stainless steel top for added durability.

6. Standard door locks for added security.

5. Interior LED lighting for efficiency and optimum merchandising.



2. Condensate evaporator for easy cleaning and service.

3. Two epoxy-coated shelves per section, adjustable in one-inch increments, maximize merchandising opportunities.

4. Internal height capacity allows stacking of three longneck beers.



Field interchangeable doors from solid to glass or glass to solid makes refrigerators adaptable to individual merchandising requirements.


DEEP WELL HORIZONTAL BOTTLE COOLERS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DIVIDERS	NO. OF LIDS	CAPACITY 12 OZ. CANS/ 12 OZ. BOTTLES	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H	L	D	H								
MBBC50	50	26 ¹ / ₂	33 ¹ / ₂	1270	673	851	115	6.1	3/8	3	2	857/377	36.3	260/118
MBBC65	64 ¹ / ₂	26 ¹ / ₂	33 ¹ / ₂	1638	673	851	115	6.1	3/8	4	2	1191/539	46.3	310/141
MBBC80	80 ¹ / ₂	26 ¹ / ₂	33 ¹ / ₂	2045	673	851	115	6.1	3/8	5	3	1575/715	57.4	415/189
MBBC95	95	26 ¹ / ₂	33 ¹ / ₂	2413	673	851	115	6.1	3/8	6	3	1893/877	67.4	430/195

1. Stainless steel top and lids for added durability.

6. Evaporator coils are coated to resist corrosion.

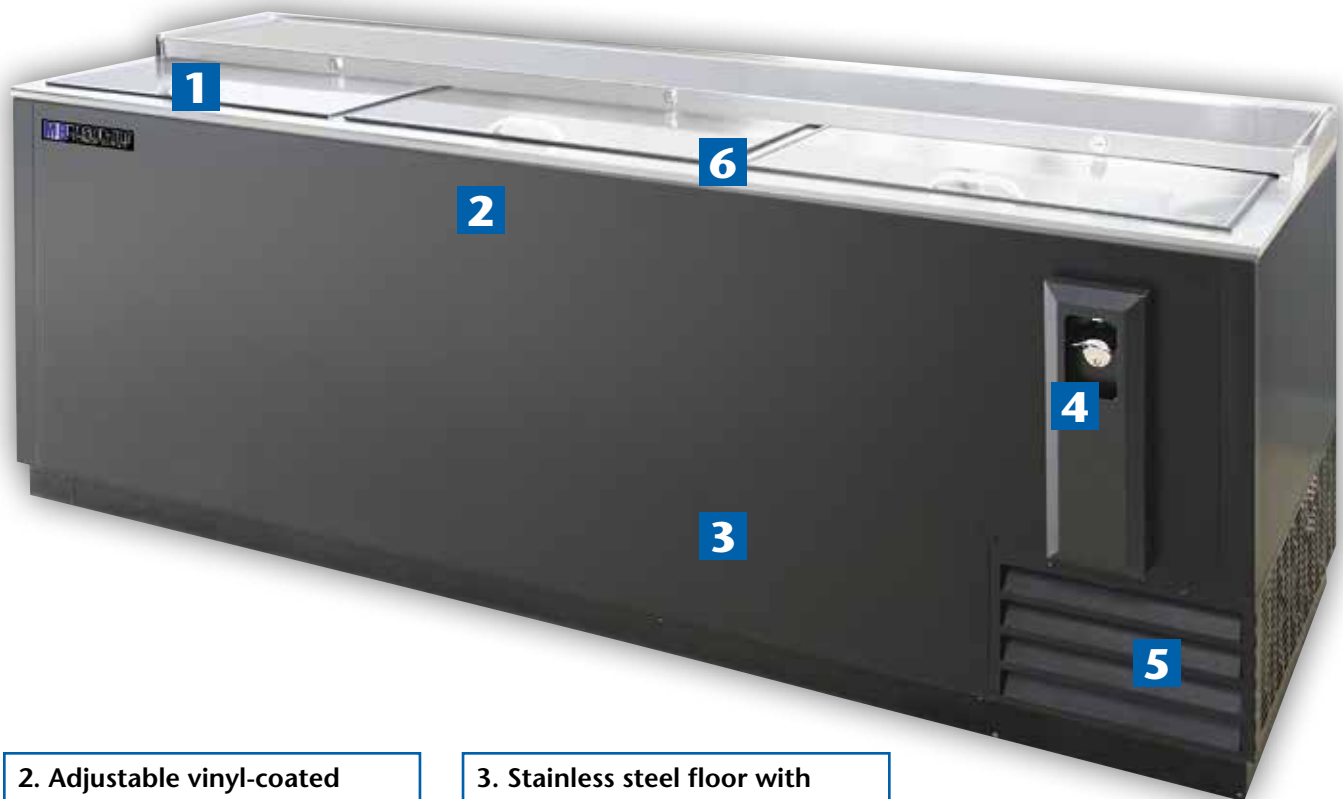

2. Adjustable vinyl-coated dividers make it easy to stack and store bottles.



3. Stainless steel floor with drain for added convenience.

4. Standard cap catcher for added convenience.

5. Access to slide-out condensing unit behind front grille for easy cleaning and service.

DIRECT DRAW BEER COOLERS



MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF TOWERS	NO. OF TAPS	NO. OF KEGS**	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H*	L	D	H*								
MBDD24	23 ³ / ₈	30 ³ / ₄	49 ³ / ₄	594	781	1264	115	3.3	1/5	1 single	1	1	21.0	187/85
MBDD59	59	29 ¹ / ₈	49 ³ / ₄	1499	740	1264	115	6.3	3/8	2 single	2	2	51.0	276/125
MBDD69	69 ¹ / ₈	29 ¹ / ₈	49 ³ / ₄	1756	740	1264	115	6.3	3/8	2 single	2	3	59.0	298/135
MBDD79	80 ³ / ₄	29 ¹ / ₈	49 ³ / ₄	2051	740	1264	115	6.3	3/8	1 single, 1 double	3	4	68.0	400/182
MBDD95	95 ¹ / ₄	29 ¹ / ₈	49 ³ / ₄	2419	740	1264	115	6.3	3/8	2 double	4	5	81.0	460/209

*Height includes draft towers **All kegs noted are 1/2 size, 16 gallon capacity except MBDD59 which holds two 1/2 kegs and one 1/4 keg.



1. Stainless steel top for added durability.

2. Slide-out condensing unit for easy cleaning and service.

3. Heavy-duty door handle stands up to repeated usage.

4. Standard door locks for security.

5. Three-inch diameter polished stainless draft towers cooled by continuous cold air circulation.



The MBDD24 model is equipped with standard casters and glass rail making it a portable "event" cooler.



For the latest product information and specifications go to
www.master-bilt.com/products



908 Highway 15 North • New Albany, MS 38652
Phone: 800-647-1284 • Fax: 800-232-3966
www.master-bilt.com



Due to continuous product enhancements, we reserve the right to change specifications without notice.

1358-9/17-web ©2017 Master-Bilt Products, an unincorporated division of Standex International Corporation. All rights reserved. Printed in U.S.A.