Save up to 50% of your frying oil



Frying oil filter & oil tester

Your solution - the VITO product line

The world's most innovative frying oil filtration system!

The VITO oil filter system cleans your oil, ensures quality and saves up to 50%.











You will save money, oil, labor, storage space and delivery costs with VITO!



Easy & safe handling

Get clean oil in approx. 5 minutes. Put VITO in the fryer at service temperature. Push the button and vou're done!




Simple cleaning

VITO is made of stainless steel and therefore dishwasher safe! VITO disassembles to fit easily in any dishwasher!



Constant quality


VITO ensures you always fry in clean oil which means great quality fried food.



The VITO effect

What is VITO doing?

Used daily, VITO filters remove food particles and carbon from your frying oil. Frying in clean, filtered oil will result in a better tasting and better looking fried product. Oil life increases and workload decreases due to less oil changes and fryer cleanings.

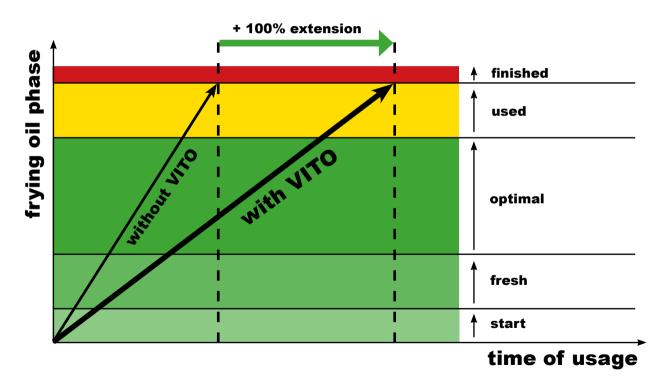


VITO portable

The world's best in-tank pressure oil filtration system!









VITO 301-3 fryers up to 12 I / 22 lbs



VITO 50 1-4 fryers up to 201 / 37lbs For light to medium sediment



VITO 80
All fryers or heavy duty.
For medium to heavy sediment

	Filtration power	Filtration efficiency	Particle uptake	Work cycle	Suction depth	Weight	Temperature	Material VITO	Particle filter	Ø
VITO 30	up to 30 l/min 66 lbs/min	up to 5 ųm 0.2 ųinch	0.8 kg 1.8 lbs	4:30 min	~ 20 cm ~ 7.9 in	6.3 kg 14 lbs	max. 200 °C max. 397 °F	Stainless steel 1.4301	Cellulose FDA-CFR 21	
VITO 50	up to 50 l/min 110 lbs/min	up to 5 ųm 0.2 ųinch	1.3 kg 2.9 lbs	4:30 min	~ 35 cm ~ 13.8 in	7.7 kg 17 lbs	max. 200 °C max. 397 °F	Stainless steel 1.4301	Cellulose FDA-CFR 21	in G
VITO 80	up to 80 l/min 176 lbs/min	up to 5 ųm 0.2 uinch	2.5 kg 5.5 lbs	4:30 min	~ 45 cm ~ 17.7 in	9.2 kg 20.3 lbs	max. 200 °C max. 397 °F	Stainless steel 1.4301	Cellulose FDA-CFR 21	Ω",







VITO mobile

The world's most innovative vacuum filtration system!











Data reader Read out the usage of VITO

VITO XM


	Filtration power	Filtration efficiency	Particle uptake	Pumping capacity	Tank	Weight	Temperature	Material VITO	Particle filter
VITO XM	up to 30 l/min up to 66 lbs/min	1 6		35 l/min 77 lbs/min		55.8 kg 123 lbs	max. 200 °C max. 397 °F	Stainless steel 1.4301	Cellulose FDA-CFR 21

Frying oil testers

Measuring oil quality increases your savings!

Change oil as needed - never too early, never too late.



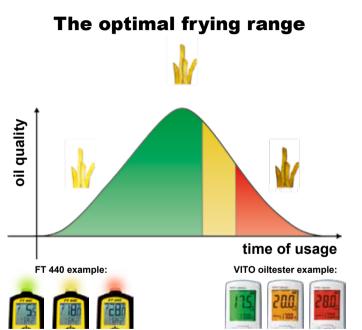



	Parameter	Resolution	Measuring range TPM	Measuring range °C / °F	Accuracy	Battery	IP format	Alarm function
FT 440	%TPM °C/°F	0.5% TPM 0.1 °C/°F	0 40% TPM	+50 °C +200 °C +122 °F +392 °F	±2.0% TPM ±1 °C/°F	3V Lithium (CR 2477)	IP 67	3-color traffic light function
VITO oiltester	%TPM °C/°F	0.5% TPM 0.1 °C/°F	0 40% TPM	+40 °C +200 °C +104 °F +392 °F	±2.0% TPM ±1.5 °C/°F	2x AAA	IP 65	3-color traffic light function







VITO

Seen in 150 countries - used in over 40.000 kitchens



















































































































The VITO - product line:

- saves up to 50% of your frying oil
- better quality for your fried products
- less workload around your fryer
- used in over 40,000 kitchens



























Manufacturer: VITO AG

Eltastr.6, 78532 Tuttlingen, Germany Phone: +49 (0) 7461 / 96289-0 Fax: +49 (0) 7461 / 96289-12 info@vito.ag - www.vito.ag

VITO® is a registered trademark of VITO AG, Germany V 5.22











