

The Original Bedside Manor



Warnings & Instructions CW-35

Read all instructions and warnings before assembly and use of crib. Be sure to check that parts listed below are included before assembling this crib.

Tool needed: Hex wrench (Included in hardware kit)

| Parts List | Pieces per Unit |
|------------------------------|-----------------|
| A) Side Rails | 2 |
| B) End Panels | 2 |
| C) Posture Board | 1 |
| D) Mattress (2" x 36" x 18") | 1 |
| E) Bolts (50 mm) | 12 |
| F) Lock Washers | 12 |
| G) Barrel Nuts | 12 |
| H) Casters | 4 |
| I) Bolt | 4 |
| J) Lock Washer | 4 |
| K) Threaded Cap | 4 |
| L) Hex Wrench | 2 |

Hardware

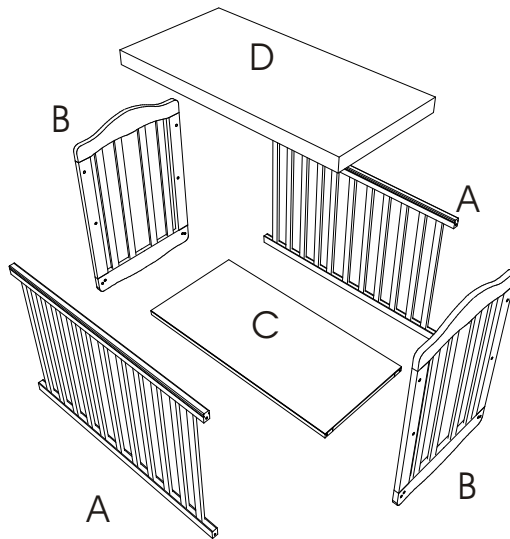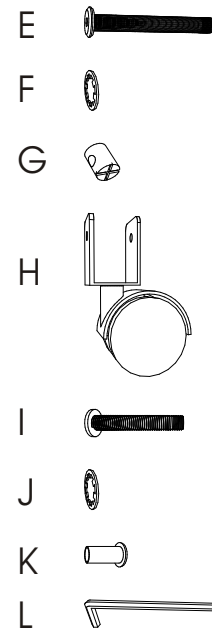

Care Instruction:


Your crib may be cleaned, using a damp cloth and ordinary mild domestic detergent. Do not use abrasives or bleach. Wipe dry.

Date of MFG.

L.A. Baby Juvenile Products
16039 Loukelton Street
City of Industry, California 91744
Toll free customer service: 800-584-3094
e-mail: customerservice@lababyco.com



Step 1

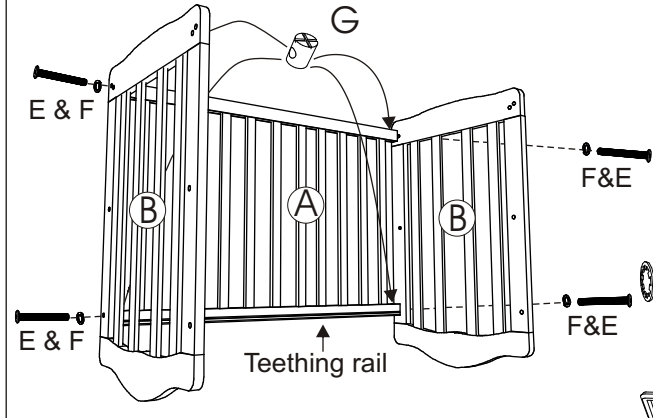

For step 1 it is easier to assemble the crib upside down on a padded surface.


Note the location of plastic teething rail.

Insert 4 barrel nuts (I) into side rail.

Attach end panel (B) to side rail (A) using 4 bolts (E) and lock washers (F) to side rail (A). Tighten with the hex wrench (L).

Attach remaining head board as you did the first.

Step 2

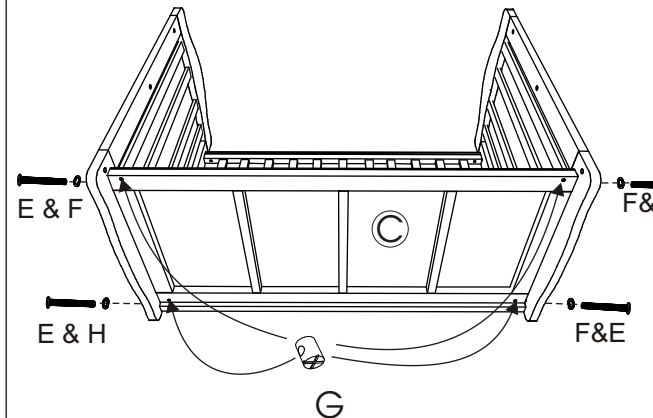

Selecting the mattress depth:

If this crib is for a newborn, the posture board (C) should be at the top. As the baby grows the posture board should be moved down.


For step 2 it is easier to continue with the side rail down on a padded surface.

Align the posture board (C) along the side rail and between the two end panels (B).

Insert 4 barrel nuts (G) into the bottom of the posture board.

Secure the posture board to the end panels (B) using 4 bolts (E) and lock washers (F). Tighten with the hex wrench (L).

Step 3

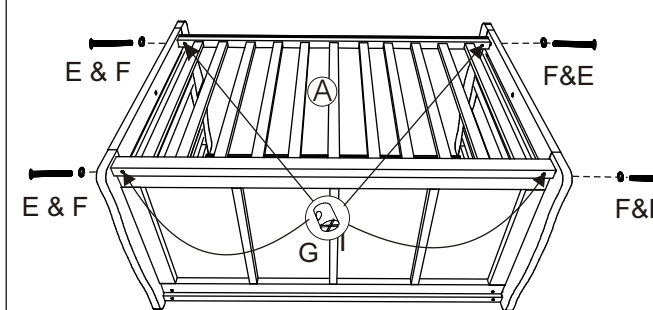


Insert 4 barrel nuts (I) into the remaining side rail ((A)

Align the remaining side rail along the posture board (C) and between the two end panels (B).

Secure the side rail using 4 bolts (E) and lock washers (F).

Step 4

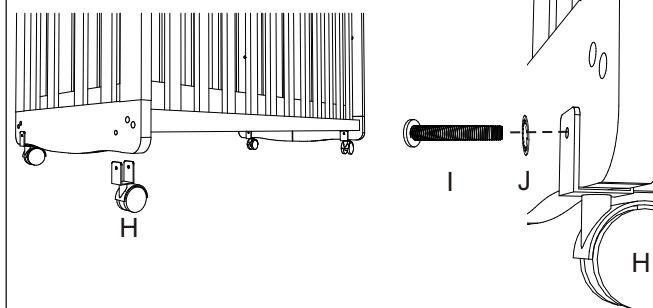

Secure casters to Cradle rocking base using bolt (I), lock washer (J) and threaded cap (K). Use two allen wrenches(L) to tighten.


Optional Add On for the CW 35 compact crib

Rock Locks


Wheels can be removed and the crib used as a rocking crib. The rocking crib feature can only be used before the infant begins to push up on hands and knees or has reached 18 lbs whichever comes first.

The rock locks can only be used when mattress is at the highest position, for enabling or disabling the rocking feature

| Part | Pieces |
|--------------|--------|
| M) Hex Bolts | 4 |
| N) Wood Feet | 4 |
| O) Washers | 8 |
| P) Nuts | 4 |
| Q) Wrench | 1 |

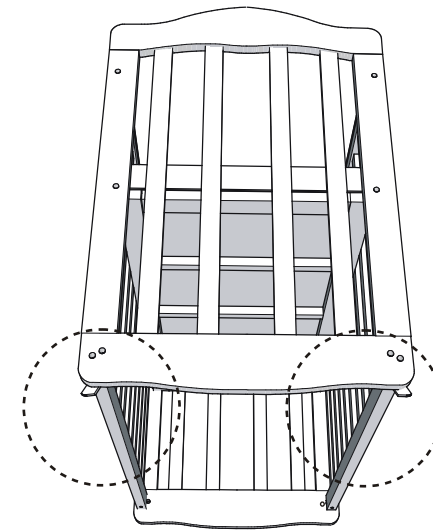

To disable the rocking feature of the crib. Attach the four wooden feet (N) to the inside of both of the headboards using the bolts, (M) washers (O) and nuts (Q).

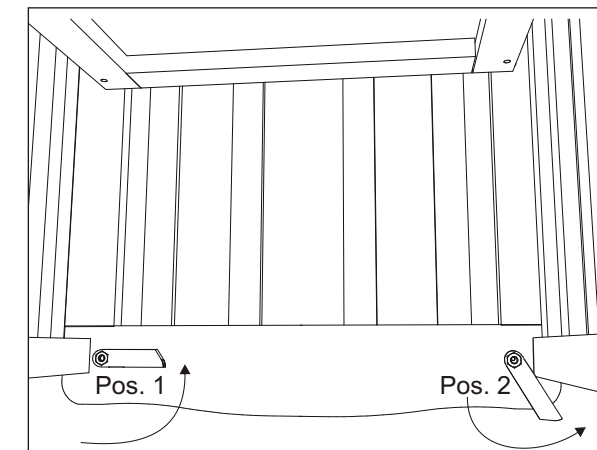

To disable the rocking feature:

To stop the rocking motion, you can re-install the 4 casters or install and use the 4 "Rock Locks". If using the rock locks rotate the four feet (N) until snugged up to the bottom rail. (Pos.2)

To enable the rocking feature:

Remove the wheels. Rotate the four feet (N) up. (Pos. 1)

⚠ WARNING: FAILURE TO FOLLOW THESE WARNINGS AND THE INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.

- **NEVER** use this product if there are any loose or missing fasteners, loose joints, or broken parts. Check before assembly and periodically during use. **Make sure latches are secure.** Contact L.A. Baby for replacement parts.
- **NEVER** substitute parts

⚠ WARNING: Infants can suffocate.

- In gaps between a mattress too small or too thick and product sides.
- On soft bedding.
- **NEVER** add a mattress, pillow, comforter, or padding.

⚠ WARNING: Use only mattress provided by manufacturer, which must be at least 38 inches long by 18 inches wide and not more than 2 inches thick.

- This crib including side rails must be fully erected prior to use.
- When child is able to pull to standing position, set mattress/base to lowest adjustment position and remove bumper pads, large toys, and other objects that could serve as steps for climbing out.
- **NEVER** place a crib near windows where cords from blinds or drapes may strangle a child.
- Discontinue use of the crib when child is able to climb out or reaches a height of 35 inches (890 millimeters), the child should be placed in a youth bed.
- If refinishing, use a non-toxic finish specified for children's products.
- Child can become entrapped and die when improvised netting or covers are placed on top of crib. **NEVER** add such items to confine child in crib.
- **NEVER** use a water mattress with this crib.
- Replace teething rail if damaged, cracked, or loose
- Always provide the supervision necessary for the continued safety of your child. When used for playing, **NEVER** leave child unattended
- To reduce the risk of SIDS, pediatricians recommend healthy infants be placed on their back to sleep, unless otherwise advised by your physician.
- **CAUTION:** Keep small parts and plastic bags out of reach of small children
- **NEVER** use plastic shipping bags or other plastic film as mattress covers not sold and intended for that purpose. They can cause suffocation

⚠ WARNING! Strings can cause strangulation! **NEVER** place items with a string around a child's neck, such as hood strings or pacifier cords

- **NEVER** suspend strings over a crib or attach strings to toys.

This crib conforms to applicable regulations promulgated by the Consumer Product Safety Commission.

This crib meets new C.P.S.C. 16 CFR 1220 and A.S.T.M. 406 12a Standards.

Made in China

Ins_CW-35-U_061314