



### Mini™ & Mini™-E Sizing Guide

## Mini™ Sizing Guide Hand Washing Sink Tankless Electric Water Heater

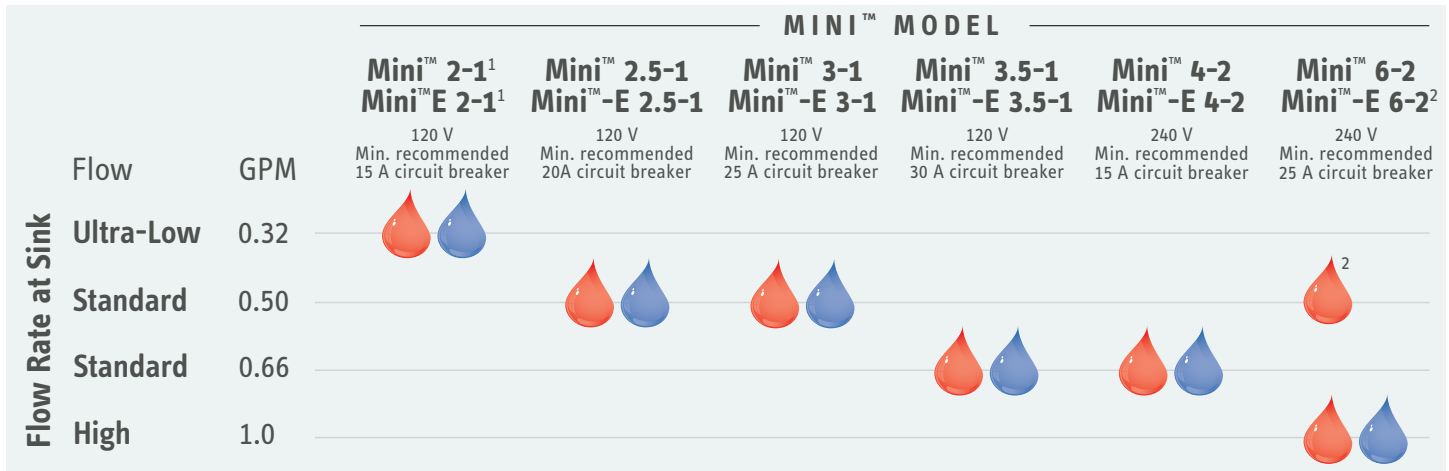

<sup>1</sup> Mini™ 2-1 is internally restricted to 0.32 GPM. Mini™-E 2-1 is internally restricted to 0.40 GPM.

<sup>2</sup> Mini™-E 6-2 is capable of supplying 2 sinks in Warm (Southern) Climate and ships with two 0.5 GPM pressure compensating flow reducer/aerators that must be installed. Substitute with a 1.0 GPM pressure compensating flow reducer/aerator if plumbed to 1 sink. Mini™ 2-1, 2.5-1, 3-1 & Mini™-E 2-1, 2.5-1, 3-1 ship with a 0.5 GPM pressure compensating flow reducer/aerator that must be installed. Mini™ 3.5-1, 4-2 & Mini™-E 4-2 ship with a 0.66 GPM pressure compensating flow reducer/aerator that must be installed.

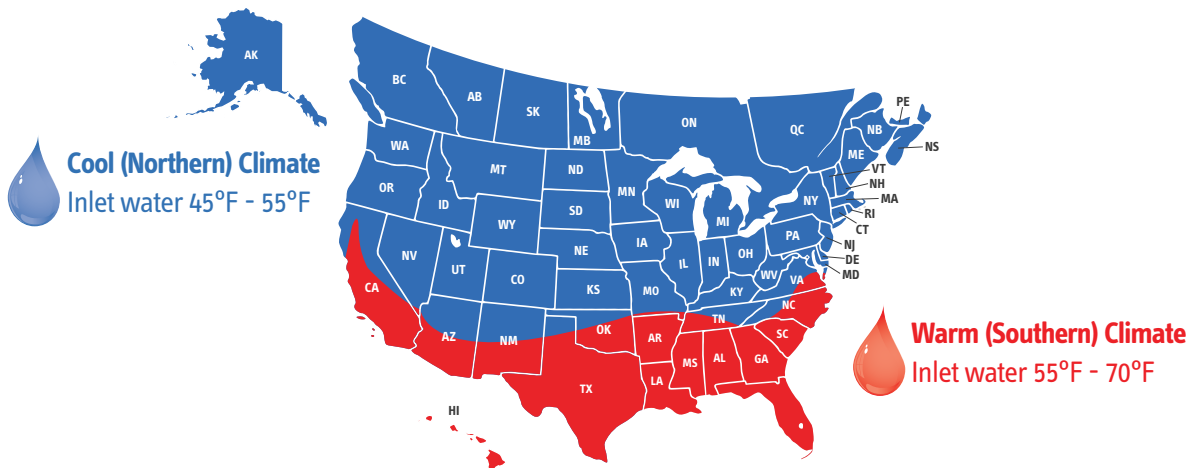

Recommendations for 240 V models are correct if installed with 240 V service.

Increase one model size if unit will be installed with 208 V service.

Call Stiebel Eltron at 800.582.8423 if you have any sizing questions, or if you have any out-of-the-ordinary situations. Stiebel Eltron service representatives can make recommendations on sizing, or provide assistance with our water heaters, to both homeowners and professional installers.

Scroll for temp rise charts. ↓

Mini™ & Mini™-E Sizing Guide

