



**The T&S
Pre-Rinse Swivel:**
*Once You Try It
You'll Always Swivel!*



"What Could Make Our Customer's Work Easier – and Save Them Money?"

That is the question the T&S foodservice product engineering team considered before it ultimately designed the new **T&S Pre-Rinse Swivel (018200-40)**.

In a busy commercial kitchen, we saw the need for a **simple, ergonomic device, either already installed or easily retrofitted between a spray handle and hose**. The T&S Pre-Rinse Swivel most importantly gives you **full 360° rotation capability** while using your spray assembly or pre-rinse unit spray valve.

The swivel's unimpeded and ultra smooth rotation significantly cuts down on strain and fatigue on the user's wrist and joints, not to mention extends the life of the pre-rinse hose and spray. And because you won't spend time wrestling with a pre-rinse spray valve that doesn't rotate the way you may want it to, it will ultimately save you time, water and money.

We also include the **Pre-Rinse Swivel factory installed on select T&S Pre-Rinse Units and Spray Assemblies** (see the chart below for available models). The T&S Pre-Rinse Swivel works seamlessly with all T&S, Equip and many other manufacturer's Spray Valve models.



You won't spend extra time wrestling with a pre-rinse spray valve that doesn't do what you want it to do.

Result: The T&S Pre-Rinse Swivel will ultimately save you time, water and money.

T&S Pre-Rinse Swivel MODELS

Model	Description
018200-40	Swivel Kit with (2) washers for retrofit installations
NEW B-0036-H-SWV	36" flexible stainless steel hose and Swivel
NEW B-0044-H-SWV	44" flexible stainless steel hose and Swivel
NEW B-0044-H2A-SWV	44" flexible stainless steel hose, less handle and Swivel
NEW B-0068-H-SWV	68" flexible stainless steel hose and Swivel
B-0100-SWV	B-0107 Spray Valve (1.42 GPM) with B-0044-H flexible stainless steel hose and Swivel
B-0100-C-SWV	B-0107-C Low-Flow Spray Valve (0.65 GPM) with B-0044-H flexible stainless steel hose and Swivel
B-0100-J-SWV	B-0107-J Low-Flow Spray Valve (1.07 GPM) with B-0044-H flexible stainless steel hose and Swivel
B-0113-B-SWV EasyInstall	EasyInstall Pre-Rinse Unit, single deck-mount faucet, B-0107 (1.42 GPM) spray valve with Swivel, wall bracket
NEW B-0113-SWV EasyInstall	EasyInstall Pre-Rinse Unit, single deck-mount faucet, B-0107 (1.42 GPM) spray valve with Swivel
B-0133-B-SWV EasyInstall	EasyInstall Pre-Rinse Unit, 8" C/C wall-mount mixing faucet, B-0107 (1.42 GPM) spray valve, Swivel, wall bracket
NEW B-0133-SWV EasyInstall	EasyInstall Pre-Rinse Unit, 8" C/C wall-mount mixing faucet, B-0107 (1.42 GPM) spray valve with Swivel
NEW B-0133-B08-SWV Jet Spray EasyInstall	EasyInstall Pre-Rinse Unit, 8" C/C wall-mount mixing faucet, B-0108 (1.48 GPM) JetSpray valve with Swivel
B-0133-CR-B8SWX Jet Spray EasyInstall	EasyInstall Pre-Rinse Unit, 8" C/C wall-mount mixing faucet, ceramic cartridges, B-0108 (1.48 GPM) spray valve with Swivel, wall bracket, club handles



SAVE ENERGY WATER MONEY




018200-40
Pre-Rinse Swivel Kit includes (2) Washers

Available for retrofit installations

The T&S Pre-Rinse Swivel FEATURES and BENEFITS

- Solid heavy-duty construction – robust and long-lasting
- Stainless steel concealed ball bearings provide ultra-smooth operation and will not corrode
- Chrome plated brass finish is durable and will not rust
- Spray handle rotates easily and independently from hose
- Its ergonomic design puts less stress on wrist and joints
- Less torque being put on the hose and handle means it is less prone to breakage or failure
- It can be conveniently retrofitted on all T&S and Equip hose assemblies and many other major manufacturer's models
- Retrofit installation is easily done with a 5/16" hex wrench; the pre-rinse swivel (018200-40) includes two replacement washers (see p.4 for installation)
- All T&S Pre-Rinse Swivel models fully comply with:
 - ASME A112.18.1 / CSA B125.1
 - ANSI/NSF 61 - Section 9
 - California Health and Safety Code 116875 (AB1953-2006)
 - NSF/ANSI 372 ~ Low Lead Content (0.25% Max)
 - EPAct 2005

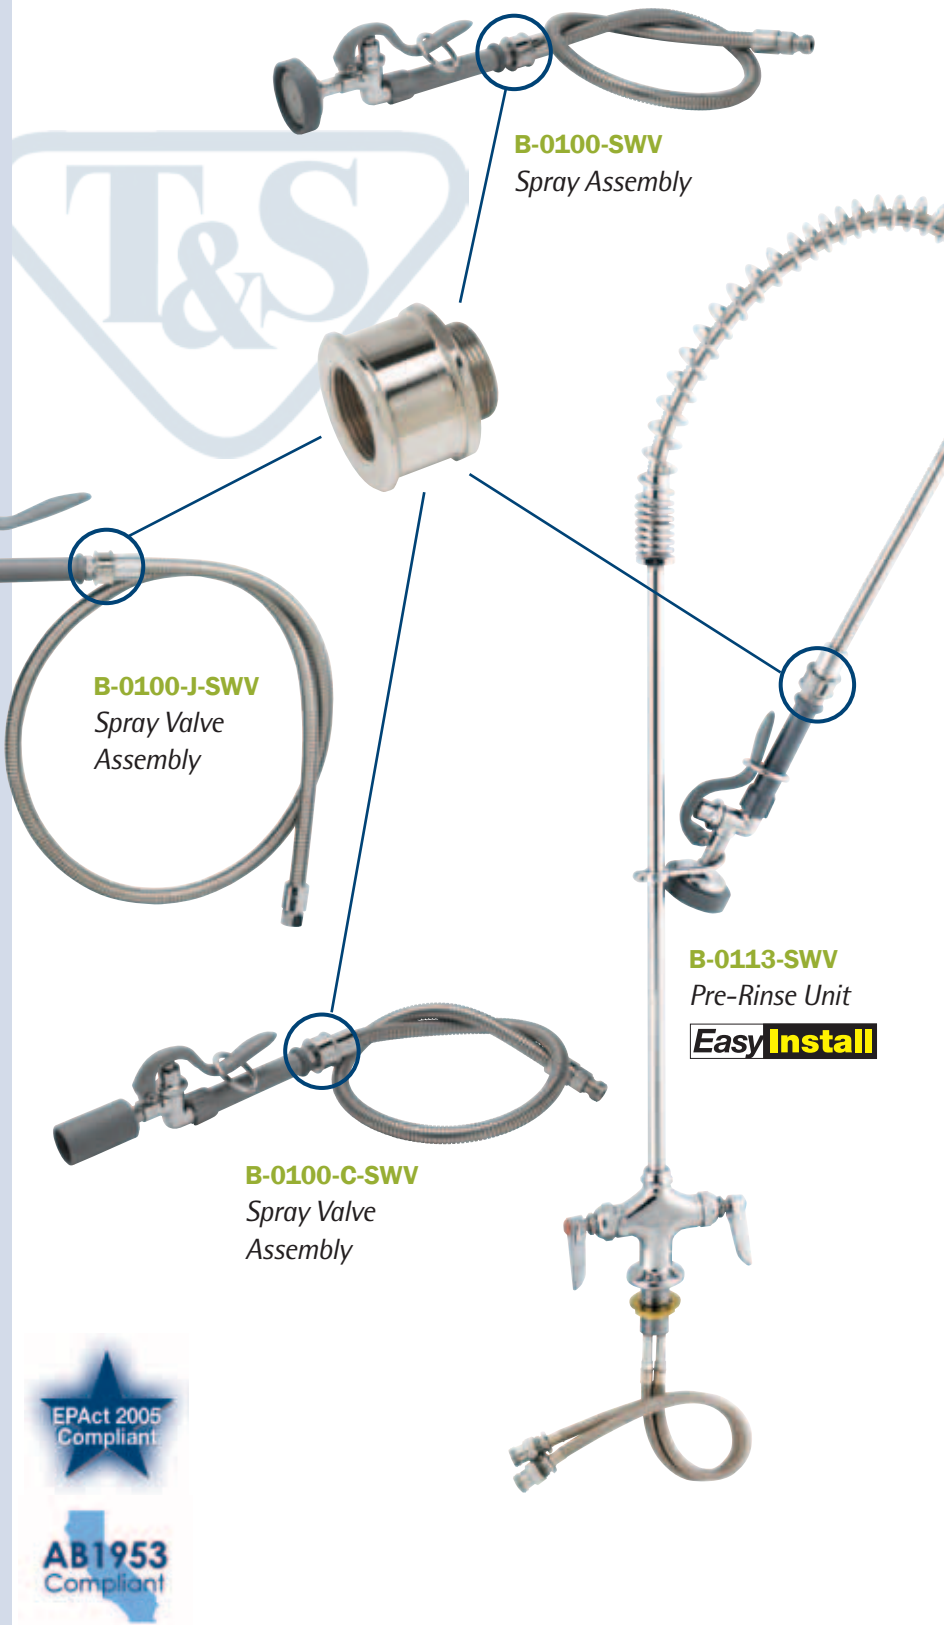



How Do I Add the T&S Pre-Rinse Swivel...

...to my Pre-Rinse Spray Valve?

The T&S Pre-Rinse Swivel RETROFIT INSTALLATION

1. Unscrew the grey handle from the hose (see exploded view, below) and place a new (001014-45) washer in the hose barrel.
2. Start threading the male end of the pre-rinse swivel to the hose. With a 5/16" hex L-key firmly tighten the pre-rinse swivel to the hose.
3. Place the second washer (001014-45) in the pre-rinse swivel end and screw the spray valve handle* into the pre-rinse swivel using your hands or a 7/8" wrench. Tighten firmly.



* If you have a B-0108 series spray valve, tighten the pre-rinse swivel directly to the spray valve.



B-0100-SWV



B-0100-C-SWV

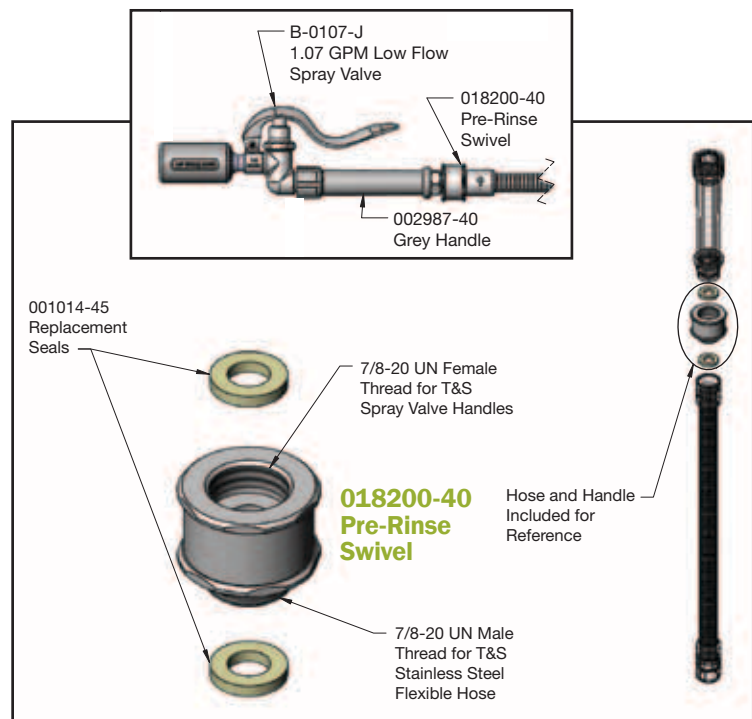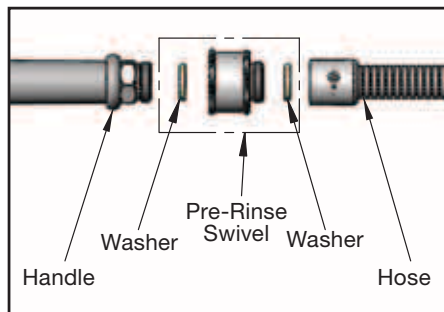

RELIABILITY BUILT IN™

T&S Brass and Bronze Works, Inc.
www.tsbrass.com

2 Saddleback Cove • P.O. Box 1088 • Travelers Rest, SC 29690
Phone 800.476.4103 • Fax 864.834.3518

