

THREE STATION A.D.A. WALL MOUNTED SINK WITH TUBULAR SUPPORTS

WITH/WITHOUT MANUAL FAUCET





"-F" Series Sink Includes K-161-LU Gooseneck Faucets with Wrist Handles











FEATURES:

8 1/2" high backsplash.

5" sink bowl depth.

Two stainless steel "Z" brackets supplied each unit.

One K-6 3 1/2" rear basket drain.

Two tubular stainless steel support brackets that allow full clearance underneath.

Manual Operated: Faucets sold separately.

"-F" Series includes two K-161-LU 3 1/2" gooseneck faucets.

CONSTRUCTION:

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Die formed tubular wall brackets.

MATERIAL:

All 16 gauge type "304" stainless steel.

1 5/8" tubular "304" stainless steel wall brackets.

Stainless steel aussets.

MECHANICAL:

8" O.C. faucet holes punched at each station.

		# of Faucets Sink	# of Faucets		Cu.
Model #	Length	Accommodates	Included	Wt.	Ft.
FC-WM-60-ADA	60"	3	0	84 lbs.	22
			(Faucets Not Included)		
FC-WM-60-ADA-F	60"	3	3	84 lbs.	22
			(K-161-LLI Faucets Included)		





Ships UPS

Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.

MARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.




Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:
Email: customer@advancetabco.com or Fax: 631-242-6900


For Smart Fabrication™ Quotes:
Email: smartfab@advancetabco.com or Fax: 631-586-2933


TOL ± .500" FITTINGS SUPPLIED AS SHOWN ALL DIMENSIONS ARE TYPICAL

FC-WM-60-ADA

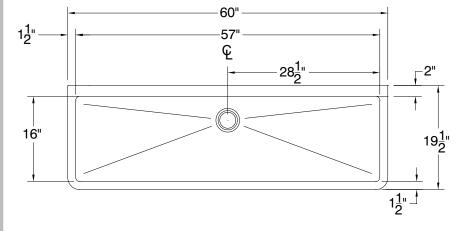



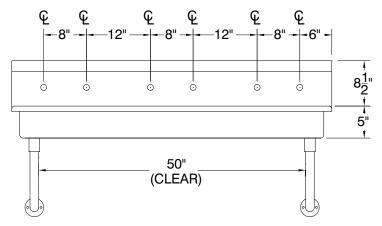



84 Lbs.

