



NOR-LAKE, INCORPORATED  
727 Second Street  
Hudson, Wisconsin 54016

800-955-5253  
715-386-2323  
866-961-5253 Parts  
800-388-5253 Service  
715-386-6149 FAX  
www.norlake.com

## CAPSULE PAK™ REFRIGERATION SYSTEMS



### STANDARD FEATURES

- Available for coolers or freezers
- Indoor or outdoor models
- Two temperatures: +35°F and -10°F
- Ceiling or wall mount
- Air cooled condensing unit
- Scroll™ compressors
- Enviro-Control™ electronic controller system
- Automatic condensate vaporizer (shipped loose), no drain lines required on indoor units
- Time clock or electronic control provided for automatic defrost on both coolers and freezers
- UL and C-UL electrical listing on complete Capsule Pak™ refrigeration systems\*\*
- AWEF compliant (ceiling mount only)
- -20°F ambient controls (outdoor models)
- 18 months parts and labor warranty

### OPTIONAL FEATURES \*

- Condensing unit air deflector kit
- Heater kit for outdoor use where ambient conditions may go below 32°F
- Electric condensate vaporizer
- Pre-charged lines
- Wiring harness
- 5 year compressor warranty

\* Most options are available two weeks from receipt of order. Please contact us with specific questions.

\*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

# PHYSICAL SPECIFICATIONS

## Capsule Pak™ Refrigeration System Specification

Capsule Pak™ refrigeration systems consist of a pre-charged quick-connect condensing unit and evaporator coil which are factory assembled, wired, charged, tested and fully equipped for insertion into a factory prepared walk-in opening. The Capsule Pak™ system has a flush coil which keeps all components outside the walk-in storage area, allowing more storage inside. Models are available for wall or ceiling mounting for use on indoor or outdoor installations. Models are available for interior compartment design temperatures of +35°F and -10°F. Installation is fast and easy. No plumbing required on indoor units.


The Capsule Pak™ evaporator section is a factory assembled component of the complete Capsule Pak™ refrigeration system. The evaporator is designed to be located entirely outside the walk-in with no intrusions into the refrigerated space. The evaporator enclosure is constructed utilizing foamed-in-place polyurethane insulation and equipped with a removable, gasketed access cover. Capsule Pak™ models use high efficiency EC evaporator fan motors to circulate air throughout the walk-in.

All indoor Capsule Pak™ models are equipped with either a discharge gas condensate vaporizer or an optional electric condensate vaporizer. All outdoor Capsule Pak™ models are equipped with low ambient controls consisting of crankcase heater, flooded condenser head pressure control and pump down cycle.

**All standard Capsule Pak™ refrigeration systems are stocked for same day shipment.**

All standard ceiling mount Capsule Pak™ refrigeration systems are UL and C-UL listed and AWEF compliant.

Note: Allow minimum of 4" clearance above the Capsule Pak™ system for installation. Consideration should be given to accessibility for service and free condenser air flow. Consult factory with installation questions.

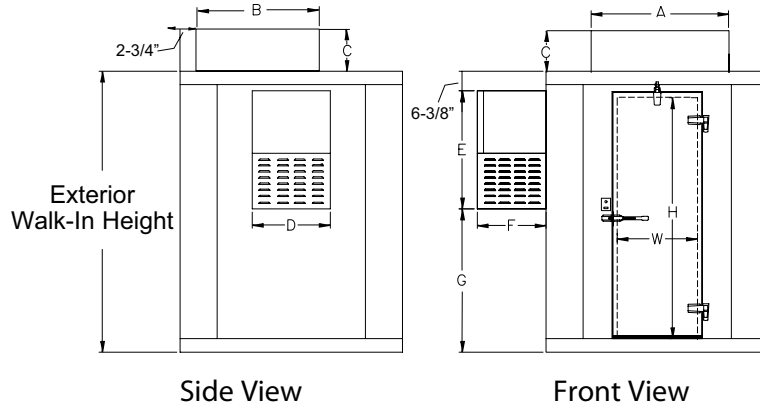

Door Opening Size		
W	H	MODEL
26"	66"	STD Series
26"	78"	74 Series
26"	78"	77 Series

### Ceiling Mount Capsule Pak™ Refrigeration Systems

Model Number	"A"	"B"	"C"
RCPB050JC-S-0-EV	59- 1/2"	46"	25"
RCPB050JC-E-0-EV	59- 1/2"	46"	25"
RCPB075JC-S-4-EV	59- 1/2"	46"	25"
RCPB075JC-E-4-EV	59- 1/2"	46"	25"
RCPB100JC-S-4-EV	59- 1/2"	46"	25"
RCPB100JC-E-4-EV	59- 1/2"	46"	25"
RCPF060JC-S-4-EV	59- 1/2"	46"	25"
RCPF060JC-E-4-EV	59- 1/2"	46"	25"
RCPF075JC-S-4-EV	59- 1/2"	46"	25"
RCPF075JC-E-4-EV	59- 1/2"	46"	25"
RCPF100JC-S-4-EV	59- 1/2"	46"	25"
RCPF100JC-E-4-EV	59- 1/2"	46"	25"
RCPF150JC-S-4-EV	59- 1/2"	46"	25"
RCPF150JC-E-4-EV	59- 1/2"	46"	25"

### Wall Mount Capsule Pak™ Refrigeration Systems

Model Number	"A"	"B"	"C"	"D"	"E"	"F"	"G" Dimension Exterior Walk-in Height			
							6'0"	6'7"	7'4"	7'7"
CPB050DW	N/A	N/A	N/A	25-1/4"	38"	22-1/4"	27-3/8"	34-3/8"	43"	46-3/8"
CPB075DW	N/A	N/A	N/A	44-1/8"	45"	30"	N/A	27-5/8"	36-1/4"	39-5/8"
CPF100DW	N/A	N/A	N/A	44-1/8"	45"	30"	N/A	27-5/8"	36-1/4"	39-5/8"

Consideration must be given to accessibility for service and free condenser air flow. Consult factory with installation questions. Proper condensing unit ventilation must be provided. The factory recommends 200cfm of fresh air in the surrounding area with ample clearance around the condensing unit.

Note: Wall mount systems, built prior to 2020, contain R-404A refrigerant.

Subject to change without notice

# ELECTRICAL DATA

## Capsule Pak™ Refrigeration Systems (All Systems Use R449A Refrigerant)

Model #	Voltage	Cond. Unit MCA	Cond. Unit Max. Fuse	Unit Cooler MCA	Total System Max. Fuse	AWEF
RCPB050JC-S-0-EV	120	10.5	15	0.5	15	5.61
RCPB050JC-E-0-EV	120	10.5	15	0.5	15	7.6
RCPB075JC-S-4-EV	208/230	8.6	15	0.3	15	5.61
RCPB075JC-E-4-EV	208/230	8.6	15	0.5	15	7.6
RCPB100JC-S-4-EV	208/230	11.4	15	0.3	15	5.61
RCPB100JC-E-4-EV	208/230	9.3	15	0.5	15	7.6
RCPF060JC-S-4-EV	208/230	9	15	9	15	N/A
RCPF060JC-E-4-EV	208/230	9	15	9	15	N/A
RCPF075JC-S-4-EV	208/230	9	15	9	15	N/A
RCPF075JC-E-4-EV	208/230	9	15	9	15	N/A
RCPF100JC-S-4-EV	208/230	10.7	15	9	15	N/A
RCPF100JC-E-4-EV	208/230	10.7	15	9	15	N/A
RCPF150JC-S-4-EV	208/230	18.4	30	9	30	N/A
RCPF150JC-E-4-EV	208/230	18.4	30	9	30	N/A

Note: Electrical specification intended to be single point connection (including electrical harness or close coupled system)

Model #	Voltage	Total System Refrig. Amps	Total System Defrost Amps	MCA	NEMA Plug Or Max Fuse Size
CPB050DW	120	11.2	N/A	N/A	5-20P
CPB075DW	120	8.7	N/A	N/A	6-15P
CPF100DW	208/230	11.4	7.1	14.9	20

Subject to change without notice





## Ceiling Mount Capsule Pak™ System

Ceiling Mount Capsule Pak™ systems are conveniently located on top of the walk-in to maximize available floor space. Available in indoor and outdoor models for single or dual walk-in compartments. Ceiling mount systems are available for same day shipment.



## Wall Mount Capsule Pak™ System

The Wall Mount Capsule Pak™ System provides easy access for service and installation where there is not enough room for a ceiling mounted application. Available in indoor models for single or dual walk-in compartments. Wall Mount Systems are available to ship in ten days and feature R-404A refrigerant.

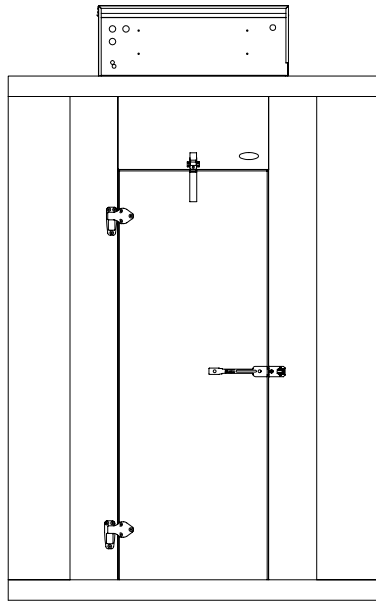

Outdoor "E" systems include ambient controls and weather-proof hoods. Also available are optional pre-charged systems with quick connects for simple field connections to pre-charged line lengths of your choice.

Consult factory for application specifics, pricing, and ship date availabilities.

## Remote Capsule Pak™ Refrigeration Systems (All Systems Use R-449A Refrigerant)

Model	Cond. Unit MCA	Cond. Unit Max. Fuse	Cond. Unit Width*	Cond. Unit Length*	Cond. Unit Height*	Cond. Unit Weight*	Unit Cooler MCA	Unit Cooler Max. Fuse	Unit Cooler Length*	Unit Cooler Width*	Unit Cooler Height*	Unit Cooler Weight*	Total System MCA	Total System Max. Fuse	Cond. Unit Voltage	Cond. Unit AWEF	Unit Cooler Voltage
RCPB050JC-E-0-EV	10.5	15	33.5	26.5	20.5	155	0.5	15	33	46	25	148	10.54	15	120	7.6	120
RCPB075JC-E-4-EV	8.6	15	33.5	26.5	20.5	175	0.5	15	33	46	25	148	9.37	15	208/230	7.6	208/230
RCPB100JC-E-4-EV	9.3	15	33.5	26.5	20.5	175	0.5	15	33	46	25	148	9.75	15	208/230	7.6	208/230
RCPF060JC-E-4-EV	9	15	33.5	26.5	20.5	175	9	15	33	46	25	138	9.15	15	208/230	N/A	208/230
RCPF075JC-E-4-EV	9	15	33.5	26.5	20.5	175	9	15	33	46	25	148	9.15	15	208/230	N/A	208/230
RCPF100JC-E-4-EV	10.7	15	33.5	26.5	20.5	175	9	15	33	46	25	148	10.04	15	208/230	N/A	208/230
RCPF150JC-E-4-EV	18.4	30	33.5	26.5	20.5	175	9	15	33	46	25	148	18.87	30	208/230	N/A	208/230

\*Dimensions in inches

## Enviro-Control™ Standard on Remote Capsule Pak Systems

Enviro-Control is a highly efficient electronic controller designed to increase reliability, connectivity and food safety while reducing operating costs.

- Adjust many functions of your Capsule Pak system through the simple interface
- With an optional router you can monitor and control your system from your desktop, smartphone or tablet



## Optional Electric Condensate Vaporizer

The electric condensate vaporizer for Remote Capsule Pak™ Systems is exclusive to Nor-Lake. Because this UL and C-UL approved option requires no drain lines on indoor applications, installation is simple and equipment is operational faster.

NOR-LAKE, INCORPORATED  
 727 Second St.  
 Hudson, WI 54016  
 800-955-5253  
 715-386-2323  
 800-388-5253 PARTS, INSTALLATION, WARRANTY  
 715-386-4291 FAX  
 www.norlake.com



**Standex**  
 Food Service Equipment Group



Revision Date: 1/20  
 Part Number: 132724