



# LUBRIGREASE

## FOOD GRADE WHITE GREASE

### DESCRIPTION

A multi-purpose, high purity food grade lubricant that provides long lasting grease protection. Withstands heat to 500°F. Temperatures above 400°F may require periodic reapplication.

### APPLICATIONS

For use by bakeries, bottlers, breweries, canneries, dairies, egg processors, meat and poultry processors, pharmaceutical manufacturers and food processing and packaging plants.

### FEATURES & BENEFITS

- Lubricates
- Resists Extreme Pressure, Corrosion & Water Washout
- Temperature Range of -40° – 500°F
- Reduces Friction & Wear
- Resists Throw-Off
- Calcium Sulfonate Based

### SPECIFICATIONS

**COLOR:** White  
**THICKENER:** Calcium Sulfonate  
**NLGI GRADE:** 2  
**PENETRATION:** 265–295  
**DROPPING POINT:** 550°F  
**TEMPERATURE RANGE:** -40°F – 500°F

**TIMKEN OK LOAD:** 60 lbs.  
**BASE OIL:** Mineral Oil  
**VISCOSITY @ 40°C:** 110 CST  
**NSF RATING:** H1  
**FOUR BALL EP LOAD:** 620 kg

### LABEL INFORMATION

**LUBRIGREASE**  
**FOOD GRADE WHITE GREASE**

A multi-purpose, high purity food grade lubricant that provides long lasting grease protection. Withstands heat to 500°F. Temperatures above 400°F may require periodic reapplication.



**FOR USE BY:** Bakeries, Bottlers, Breweries, Canneries, Dairies, Egg Processors, Meat and Poultry Processors, Pharmaceutical Manufacturers and Food Processing and Packaging Plants.

**DIRECTIONS FOR USE:** Pump in new grease until old grease comes out. Remove old grease if possible. For ball type grease fittings, fill until old grease comes out. Clean exposed areas with degreaser to remove old grease. Pump in new grease.

**CAUTION:** Keep out of reach of children. May cause irritation to eyes. Prolonged contact with skin may cause irritation. If ingested, may cause nausea, vomiting, and diarrhea. For eye contact, flush with water, see physician if oily film persists. For skin, wash with soap and water. For ingestion of more than 8 ounces contact physician.

**CONTAINS (CAS#):** Mineral Oil (8042-47-5), Calcium Sulfonate Complex (N/A).

HEALTH	0
FLAMMABILITY	1
REACTIVITY	0
PERSONAL	A

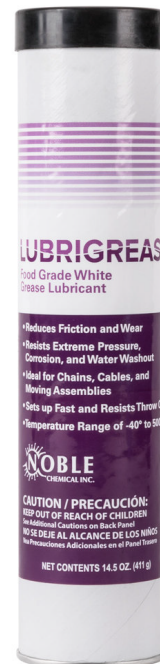

### PACKAGING INFORMATION

Available in 14.5 oz. cartridges.