

11/2019

Item #177GDN5RBW

White Glass Door Merchandiser

5.12 Cu. Ft.

Features:

- Mechanical thermostat sets internal temperature between 33-40°F.
- Operates in an ambient temperature up to 90°F.
- Polyurethane foam insulation for temperature retention.
- Manual defrost system.
- Bright LED lighting has multiple color options to illuminate your merchandise and grab your customer's attention
- Slim design takes up minimal footprint
- Eco-friendly R600a hydrocarbon refrigerant
- Intuitive mechanical thermostat
- Bottom mount condensing unit for more convenient maintenance
- Maintains a temperature range from 33-40°F
- 110V, 1/5 hp

Description:

Perfect for showcasing and storing a variety of drinks and hermetically sealed snacks, this unit is a great option for boosting impulse sales in your establishment.



This unit boasts a durable metal exterior construction with white finish while the interior is made of resilient ABS plastic. The Glass door offers clear visibility of merchandise to customers. The 1/5 hp compressor uses R600a refrigerant. Operation requires a 110V electrical connection. This unit includes 7 PVC coated shelves that can hold up to 16.5 lb. each.

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

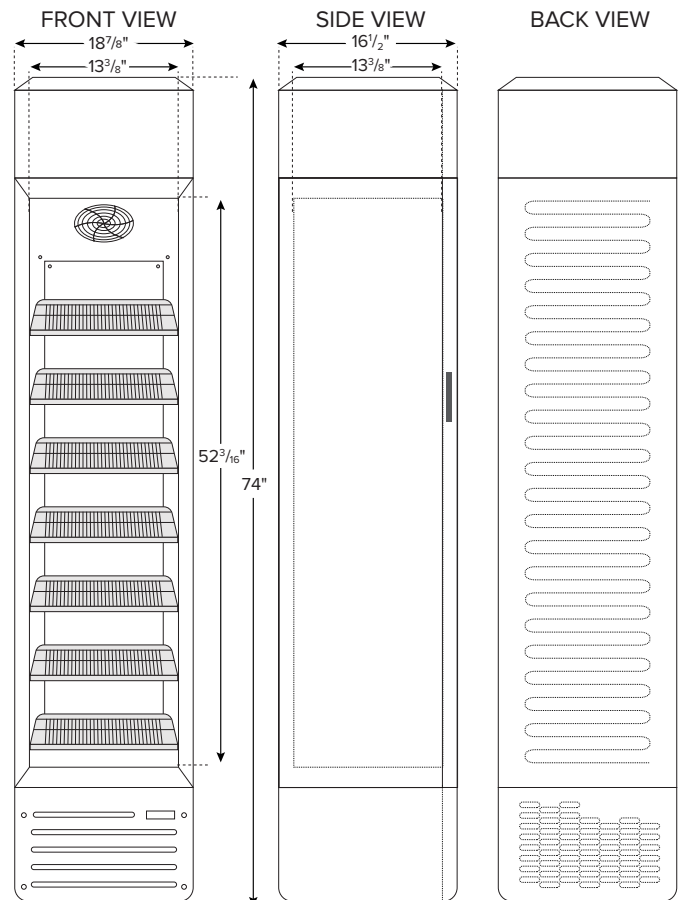

NEMA 5-15P



Dimensions

Exterior Dimensions	18 ⁷ / ₈ "W x 16 ¹ / ₂ "D x 74"H
Interior Dimensions	13 ³ / ₈ "W x 13 ³ / ₈ "D x 52 ³ / ₁₆ "H
Depth with Door Open	35 ¹ / ₂ "
Net Volume (cu. ft.)	5.12 cu ft
Net Weight	112.5 lbs
Gross Weight	121.25 lbs
Packaging Dimensions	19 ³ / ₄ "W x 20 ¹³ / ₁₆ "D x 77 ¹ / ₈ "H

Cooling

Temperature Range	33° - 40°F
Refrigerant	R600a
Max. Ambient Temperature	90°F
Defrosting	Manual Defrost
Temperature Controller	Manual Thermostat
Horsepower	1/5

Construction

Exterior Material	White Painted Steel
Interior Material	ABS Plastic
Door Type	Single glass door
Insulation Material	Polyurethane Foam Insulation
Shelves	7
Shelf Material	PVC Coated
Shelf Load Capacity	16.5 lbs.

Electrical

Voltage	110V
Amps	1.8A
Hz	60Hz
Phase	1
Plug	5-15P
Electrical Cord Length	6 ft

1 Year Limited Replacement Warranty

Unless otherwise stated, Galaxy Equipment warrants to the original purchaser of new, qualified Galaxy Equipment units (and all parts thereof), that such equipment will be free from defects in material and workmanship for a period of 1 year from the date of delivery.

If a qualified product is found to be defective during this period, Galaxy Equipment will repair the defective unit, replace any defective parts, or replace the defective unit.

What This Warranty Does Not Cover:

Galaxy Equipment will not warrant coverage for component failure or other damages that arise under the following conditions:

- Failure to install and/or use the unit within proper operating conditions specified by Galaxy Equipment. This includes installation in any and all outdoor or mobile applications.
- Failure to properly maintain the unit. This includes, but is not limited to, basic preventative maintenance such as cleaning the condenser coil.
- Products sold or used outside of the Continental United States.

Additionally, no claims can be made against this warranty for spoilage of product, loss of sales or profits, or any other consequential damages.

Normal wear type parts, such as light bulbs and gaskets, are not included in warranty coverage.

For Warranty Inquiries or Service:

To obtain warranty service, contact the location that you purchased the product from:

www.WebstaurantStore.com:

Call 717-392-7472. You must have your order number ready when contacting.

The Restaurant Store:

If you purchased this unit from your local store location, please contact your store directly. A list of store locations can be found by visiting: <http://www.therestaurantstore.com/store-directory.html>

www.TheRestaurantStore.com:

If you purchased this unit online, call 717-392-7261. You must have your order number ready when contacting.

Failure to contact the designated location prior to obtaining equipment service may void your warranty.