

Item # 177GRI20RW

1/2021

# Commercial Reach-in Refrigerator

21.75 Cu. Ft.

## Features:

- Interior LED Lighting
- Full Length Door Handle
- Digital temperature controller with automatic defrost function
- Temperature range of 33–40°F.
- 3 poly-coated metal shelves each hold 66 lb.
- ETL Safety and Sanitation listed
- Includes 4 casters (2 brakes, 2 without).
- Eco-friendly R290 hydrocarbon refrigerant.
- Bottom mount condensing unit for more convenient maintenance.
- 115V; 1/4 hp



## Cabinet Construction:

Sturdy design features white powder-coated steel exterior and White painted aluminum interior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and promotes energy efficiency.

## Refrigeration System:


Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

## Shelving:

Features 3 poly-coated metal shelves that can each handle up to 66 lb.

## Model Features:

- Easy to maneuver with 4 casters, including 2 with brakes to prevent unwanted movement.
- Automatic defrost mode improves the overall efficiency of the refrigeration system.
- Full length handle for easy use.
- Digital temperature controller.

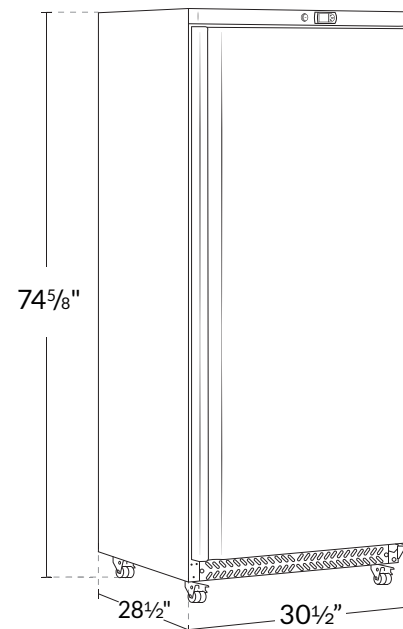

## Dimensions

Exterior Dimensions	30½"W x 28½"D x 74⅝"H
Interior Dimensions	27⅜" W x 23" D x 64⅜" H
Depth with Door Open	56⅞"
Net Volume (cu. ft.)	21.75 cu. ft.
Net Weight	209 lb.
Gross Weight	231 lb.
Packaging Dimensions	31¾"W x 29½"D x 77⅝"H

## Cooling

Temperature Range	33° to 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Auto
Temperature Controller	Carel
Horsepower	1/4+
BTU (BTU/hr)	853

## Construction

Exterior Material	White powder-coated steel door, body PCM
Interior Material	Pre-painted Alumium
Door Type	Solid Door
Insulation Material	Cyclopentane
Shelves	3+1 pcs (267/16" x 207/8", 271/8" x 123/8")
Shelf Material	poly-coated steel shelves
Shelf Load Capacity	66 lb.
Casters	2 w/ brakes 2 without

## Electrical

Voltage	115V
Amps	4.5A
Hz	60H
Plug	5-15P
Electrical Cord Length	9'10"

## Warranty Information

### 1 Year Limited Replacement Warranty - Valid Only in the Continental United States

Galaxy Kegerators, Chest Freezers, Refrigerated Merchandisers, and Reach-ins Only.

Unless otherwise stated, Galaxy Equipment warrants to the original purchaser of new, qualified Galaxy Equipment units (and all parts thereof), that such equipment will be free from defects in material and workmanship for a period of 1 year from the date of delivery.

If a qualified product is found to be defective during this period, Galaxy Equipment will repair the defective unit, replace any defective parts, or replace the defective unit.

#### What This Warranty Does Not Cover:

Galaxy Equipment will not warrant coverage for component failure or other damages that arise under the following conditions:

- Failure to install and/or use the unit within proper operating conditions specified by Galaxy Equipment.
- Failure to properly maintain the unit. This includes, but is not limited to, basic preventative maintenance like cleaning the condenser coil.
- Products sold or used outside of the Continental United States.
- Any damage that occurs as a result of negligence or improper handling.
- Overloading or improper loading of the unit in a manner that prevents proper airflow.
- Void in mobile settings.

Additionally, no claims can be made against this warranty for spoilage of products, loss of sales or profits, or any other consequential damages.

Normal wear type parts, such as light bulbs and gaskets, are not included in warranty coverage.

#### For Warranty Inquiries or Service:

To obtain warranty service, contact the location where you purchased the product:

#### [www.WebstaurantStore.com](http://www.WebstaurantStore.com):

Call 717-392-7472. You must have your order number ready when contacting.

#### The Restaurant Store:

If you purchased this unit from your local store location, please contact your store directly.

#### [www.TheRestaurantStore.com](http://www.TheRestaurantStore.com):

If you purchased this unit online, call 717-392-7261.

You must have your order number ready when contacting.

Failure to contact the designated location prior to obtaining equipment service may void your warranty.