

Item #177ICFC9HC

2/2020

Glass Lid Display Freezer ICF Series

Features:

- 7.4 cu. ft. of frozen storage space
- Curved glass lid for product visibility
- 2 coated-wire baskets for organized storage
- Foamed-in-place polyurethane insulation
- Manual temperature controls hold at -13 - 0°F
- Environmentally-friendly R290 refrigerant
- White powder-coated steel exterior
- Embossed aluminum interior
- Drain plug on back of unit
- (4) 2" casters simplify mobility and maintenance
- 1/5 hp compressor

Cabinet Construction:

Sturdy design features white powder-coated steel exterior and embossed aluminum interior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and promotes energy efficiency.

Glass lid provides constant product visibility to reduce energy loss from repeatedly opening the unit.

Refrigeration System:

Environmentally-safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

Baskets:

2 coated-wire baskets included to organize products.


Model Features:

2" diameter casters provide mobility for easy cleaning and service.


Drain plug located on backside of unit.



Front View

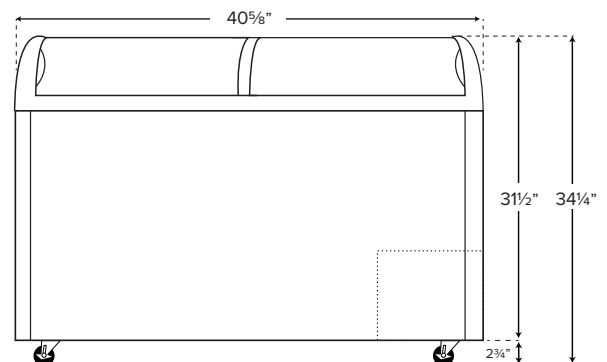

Side View

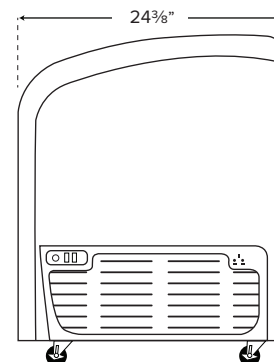

NEMA 5-15P



Intertek

Dimensions

Exterior Dimensions	40 ⁵ / ₈ "W x 24 ³ / ₈ "D x 34 ¹ / ₄ "H (Includes 2" Diameter Casters)
Interior Dimensions	35 ¹ / ₄ "W x 19"D x 26 ³ / ₄ "H (Excludes Compressor)
Net Volume	7.4 cu. ft.
Net Weight	115 lb.
Gross Weight	137 lb.
Packing Dimensions	43 ¹ / ₄ "W x 27 ¹ / ₄ "D x 39"H

Construction

Exterior Material	White Powder Coated Steel
Interior Material	Embossed Aluminum
Insulation Material	Foamed-in-place Polyurethane
Baskets	(2) 17 ¹ / ₂ " x 10 ¹ / ₂ " x 9"
Basket Material	Coated Wire
Drain Plug	Located On Back Side

Cooling

Temperature Range	-13° - 0°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Manual
Temperature Controller	Manual
Horsepower	1/5

Electrical

Voltage	115
Amps	2.5
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	80"