

# GF Series

REFRIGERATION  
**AVANTCO**

## Commercial Glass Froster/Plate Chillers



- Designed to frost beer glasses and chill salad plates for a better guest experience
- Available in black plastic coated steel or stainless steel exterior
- Painted aluminum interior
- Sliding stainless steel door
- Forced-air cooling system maintains operating temperatures of -5°F to 2°F

## 178GF25S - 25" Glass Froster and Plate Chiller, Stainless Steel



### Product Features



- Designed to frost beer glasses and chill salad plates for a better guest experience
- Type 430 stainless steel exterior
- Painted aluminum interior
- Digital controller
- Temperature range of -5°F to 2°F
- Sliding stainless steel door for easy access
- 115V, 1/3HP, R-404A refrigerant

### Technical Data

#### Dimensions

Exterior Dimensions	26"W x 28"D x 34"H
Interior Dimensions	22"W x 23"D x 26"H
Net Volume (internal)	4.1 cu. ft.
Net Weight	125 lbs.
Packaging Dimensions	32"W x 33"D x 42"H

#### Cooling

Temperature Range	-5° to 2°F
Refrigerant	R-404A
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/3

#### Construction

Number of Doors	1
Exterior Material	Type 430 stainless steel
Interior Material	Painted aluminum
Insulation Material	Foamed in place polyurethane
Number of Shelves	4
Shelf Dimensions	9¾"D x 22"W
Shelf Material	Plastic coated steel

#### Electrical

Voltage	115
Amps	3.6
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	90"

There's no better way to ensure properly chilled plates or frosted glasses than by using the Avantco GF-25S 25" stainless steel glass froster and plate chiller! With a powerful 1/3 hp compressor and a -5 to 2 degree Fahrenheit temperature range, this glass froster is the perfect way to cool your salad plates before service or put a delicate layer of frost on your craft beer glasses.


The 4.1 cu. ft. of interior space can hold plenty of salad plates or beer mugs. Using R-404A refrigerant and a forced-air cooling system, this unit efficiently chills the glasses or plates to the perfect temperature to keep your food fresh and your beer crisp and cold. To simplify maintenance, this unit is equipped with an automatic defrost system.

The interior of this unit is made of white painted aluminum while the exterior is made of durable type 430 stainless steel. Polyurethane insulation helps to maintain the interior temperatures by minimizing temperature transfer while the sliding stainless steel door allows easy access when it's time to plate up your food or draw another glass of beer. A 115V electrical connection is required for operation.

# 178GF25S - 25" Glass Froster and Plate Chiller, Stainless Steel




www.AvantcoRefrigeration.com



NEMA 5-15P

## Plan View

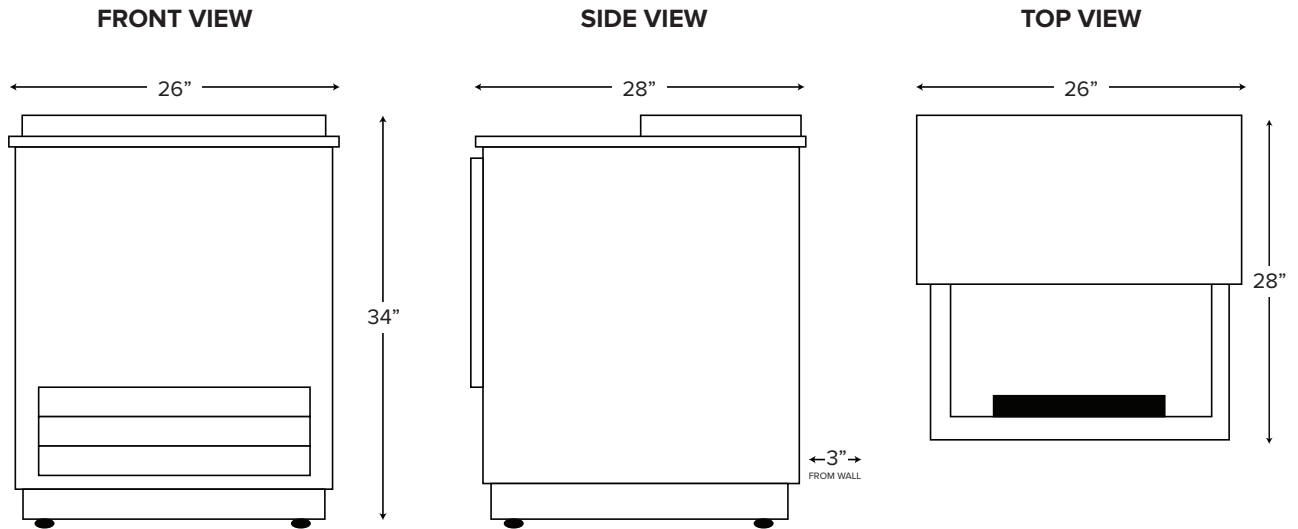

## Warranty Information

This item is backed by a 1 year parts and labor warranty with 5 year warranty on the compressor, unless otherwise stated. For warranty inquiries or service, first locate the model number (located on the front of the unit, or inside the door jamb) and the bold number on the service plate (located on the front of the unit). Next, call 1-800-678-5517. You must have the model number and service plate number when contacting service technicians.



**Failure to contact Avantco Refrigeration prior to obtaining equipment service may void your warranty.**

Avantco Refrigeration will not warrant coverage for component failure or other damages that arise under the following conditions:

- Failure to install and/or use unit within proper operating conditions specified by Avantco Refrigeration
- Failure to properly maintain the unit. This includes, but is not limited to, basic preventative maintenance such as cleaning the condenser coil.
- Installation in a non-commercial or residential application
- Products sold or used outside of the United States

Additionally, no claims can be made against this warranty for spoilage of product, loss of sales or profits, or any other consequential damages.

Normal wear type parts, such as light bulbs and gaskets, are not included in warranty coverage.