



# SSWT Series

## ADA Worktop Refrigerator

MODELS #178SSWT36RA

### CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance.

Countertop features built-in 3½" backsplash for wall protection and easy cleaning. Working height of 33⅝" sits flush to most counters.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing.

2 doors feature easy-to-use full-length stainless steel handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

### REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

### SHELVING

2 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

### MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.

PROJECT: \_\_\_\_\_

MODEL: \_\_\_\_\_ SERIAL#: \_\_\_\_\_

ITEM #: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

### SSWT SERIES - WORKTOP REFRIGERATOR

Increase cold food prep storage in your kitchen

### SPECIAL FEATURES

- ADA working height
- Strong and sleek 430 type stainless steel exterior and 304 stainless steel interior for maximum corrosion resistance
- Foamed-in-place polyurethane insulation helps maintain food safe temperatures of 33°- 40° F
- 3½" single piece backsplash built into top
- Easy-to-read digital temperature controller with auto defrost function
- Full-length stainless steel door handle for increased accessibility
- Two epoxy-coated steel shelf accommodates up to 90 lb. each
- Eco-friendly R290 hydrocarbon refrigerant
- 115V, 1/6 hp



### WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.




Parts & Labor



Compressor



★ Conforms to UL & NSF-7 Standards

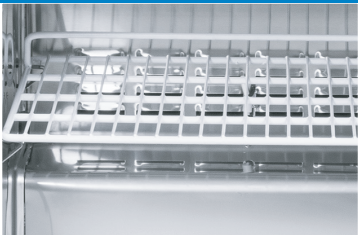

### TECHNICAL DATA

#### Dimensions

|                      |                       |
|----------------------|-----------------------|
| Exterior Dimensions  | 36¼"W x 29½"D x 37⅞"H |
| Interior Dimensions  | 33"W x 22⅞"D x 23½"H  |
| Working Height       | 33⅝"                  |
| Net Volume           | 8.2 cu. ft.           |
| Net Weight           | 198 lb.               |
| Gross Weight         | 243 lb.               |
| Packaging Dimensions | 39"W x 32¼"D x 40¼"H  |
| BTU (btu/hr)         | 409                   |

#### Construction

|                     |                              |
|---------------------|------------------------------|
| Exterior Material   | Type 430 Stainless Steel     |
| Interior Material   | Type 304 Stainless Steel     |
| Insulation Material | Foamed-In-Place Polyurethane |
| Shelf Size          | (2) 15⅞"x17⅙"                |
| Shelf Material      | Epoxy-Coated Steel           |
| Shelf Load Capacity | 90 lb.                       |



#### Cooling

|                          |             |
|--------------------------|-------------|
| Temperature Range        | 33°F - 40°F |
| Refrigerant              | R290        |
| Max. Ambient Temperature | 100°F       |
| Defrosting               | Automatic   |
| Temperature Controller   | Digital     |
| Horsepower               | 1/6         |

#### Electrical

|                        |            |
|------------------------|------------|
| Voltage                | 115        |
| Amps                   | 2.3        |
| Hz                     | 60         |
| Phase                  | 1          |
| Plug Type              | NEMA 5-15P |
| Electrical Cord Length | 84"        |

### PLAN VIEW

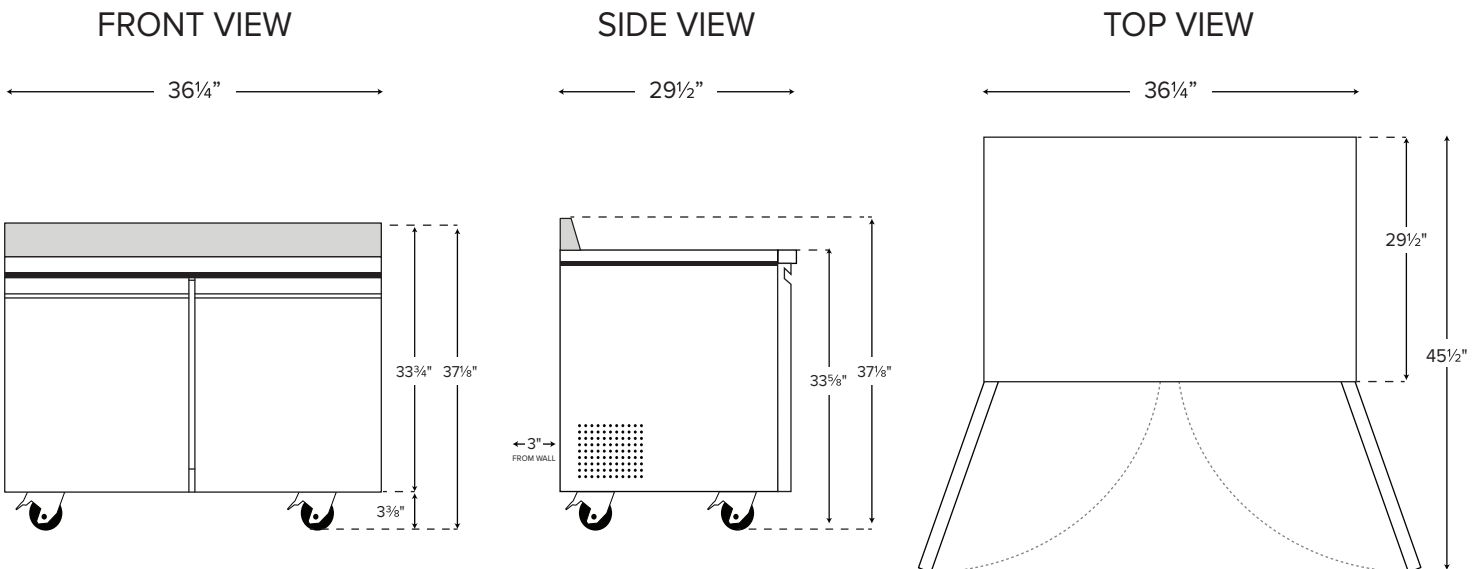

NEMA 5-15P