




CSR-9M

CSR-4M

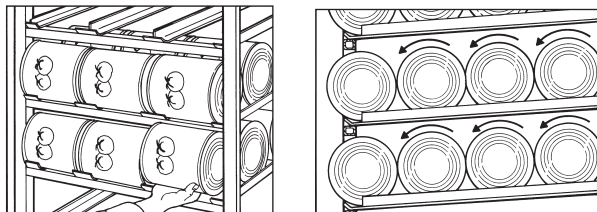

Inclined can guides provide easy access and facilitate stock rotation when loaded from rear.

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

Job Name \_\_\_\_\_

Spec No. \_\_\_\_\_

## CAN RACKS

**ALL-WELDED FULL & HALF SIZE**  
ALUMINUM CONSTRUCTION

Custom Sizes Available

Model	Description	H	W	D	Weight
<b>FULL-SIZE, CAPACITY: 162 – #10 CANS</b>					
CSR-9	Stationary	76"	25½"	35"	53
CSR-9M	Mobile	82"	25½"	35"	73
<b>HALF-SIZE, CAPACITY: 72 – #10 CANS</b>					
CSR-4M	Aluminum Top	43"	25¾"	35¼"	43
CSR-4MP	Poly Top	43"	25¾"	35¼"	57
CSR-4MS	Stainless Top	43"	25¾"	35¼"	48
<b>HALF-SIZE, CAPACITY: 54 – #10 CANS</b>					
CSR-3	No Top	34"	25¾"	35¼"	30
CSR-3M	Aluminum Top	34"	25¾"	35¼"	39
CSR-3MP	Poly Top	34"	25¾"	35¼"	53
CSR-3MS	Stainless Top	34"	25¾"	35¼"	44

**Options:**

- /011 Caster Brakes (2)
- /5B HD Caster Brakes (2)

**APPLICATIONS:** Can holding, storing and organization. Inclined angle and T-Bar guides provides easy access for can selection, rotation and inventory control. Holds both #10 and or #5 cans. Front or rear loading. First in first out when loaded from rear.

**CONSTRUCTION:** Heavy duty, high tensile extruded aluminum. Type 6063-T5 alloy. Lifetime guarantee against rust and corrosion. Shipped assembled for immediate use.

**CAN SLIDES:** Sides are 1" x 1-1/2" extruded aluminum angle and T-bar heli-arc welded to frame. Bottom load ledge design.

**FRAME AND CROSS SUPPORTS:** Vertical and horizontal frame sections are 1-1/4" extruded aluminum tubing.

**CASTERS:** Standard 5" full swivel non-marking casters. Casters are securely bolted to frame to facilitate replacements.



Notes

55 Channel Drive • Port Washington, NY 11050-2216  
 8891 NW 102nd Street • Medley, FL 33178  
 Tel: 516-944-6271 • Fax: 516-944-0625  
 Toll Free: 866-712-7283  
 www.channelmfg.com • Email: sales@channelmfg.com