

## EXTRUDED SIDEWALL HALF-SIZE UTILITY RACK MODEL 282-1815

### FEATURES AND BENEFITS:

- Durable half-size utility rack for preparation and processing operations. Top of rack has provision for a pan and cutting board; converts to personal work center.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Easy to clean; interlocking, extruded sidewalls hold 18" x 26" pans and plastic food boxes on 1-1/2" centers. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing. Eliminates potential of product damage.
- Heavy duty 3" swivel casters, two with brakes. Provides mobility when fully loaded.




282-1815



### ACCESSORIES and OPTIONS (Available at extra cost):

- Cutting Board and Pan Assembly
- Pan Stop
- Corner Bumpers
- Vertical Corner Bumpers
- Perimeter Bumper

See page G-36 for accessory details.

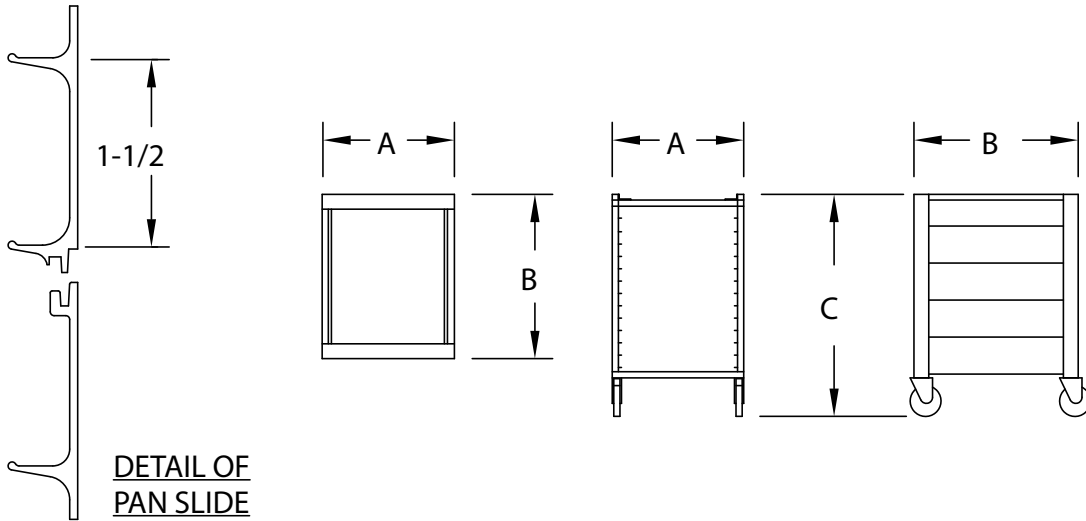

**DETAIL OF  
PAN SLIDE**

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH*	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
282-1815	15	18 X 26	IN	21-15/16	26-5/8	30	18-1/8	25-1/2	22-5/16	LBS	37
		460 X 660	MM	560	680	765	460	650	570	KG	17

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

**RACK:**

- Posts: Extruded channels, 1 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Sides: Interlocking extruded 6" panels, smooth outer sides; riveted to posts.
- Casters: 3" dia., swivel, modulus tires, 1-1/4 wide, load cap. 240 lbs. each, temp. range -45°/+180°F. Bearings are sealed and permanently lubricated. Two casters equipped with brakes.

**PAN SLIDES:**

- Extruded interlocking side walls act as pan slides on 1-1/2" centers.

**SHORT FORM SPECIFICATIONS**

Cres Cor Half-Size Utility Rack Model 282-1815. Extruded aluminum welded construction. Interlocking extruded sides for (15) 18" x 26" pans on 1-1/2" centers. 3" swivel modulus casters, permanently lubricated sealed ball bearings. Load capacity 240 lbs. each, temperature -45° to +180°F. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.