

## RIGID STEM CEILING MOUNTED INFRA RED WARMERS IFW-64 SERIES

### FEATURES AND BENEFITS:

- Rigid stem ceiling mounted infra red warmer provides stable heat source for fixed installations. Keeps food warm and appetizing for total customer satisfaction.
- Provided with four 12" stems to allow for custom lengths.
- Supplied with shatter resistant and thermal shock resistant 250 Watt red lamp (120 Volts). White lamp available upon request.
- On-Off switch located at socket for convenience.
- Our standard hood style is available in your choice of four colors: Polished Brass, Polished Nickel, Black or Red.



IFW-64-10-PB




### ACCESSORIES and OPTIONS (Available at extra cost):

- Shatter Proof Lamp
- 240 Volt Service

See page I-13 for accessory details.

# IFW-64 Series

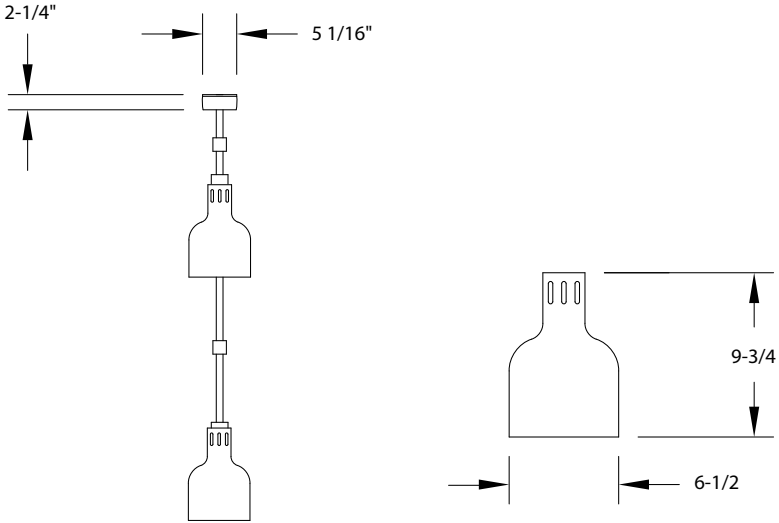

CRES COR MODEL NO. & HOOD STYLE	12" TUBING SECTIONS: ADJUSTABLE LENGTHS		WEIGHT ACT.	
	INCHES	MM	LBS.	KG.
IFW-64-10*	24-3/16 - 60-3/8	615 - 1535	3	1

\*Add color suffix:

- PN = Polished Nickel**
- PB = Polished Brass**
- BL = Black**
- R = Red**

**WARMER:**

- Canopy: Spun from .051 aluminum, black anodized.
- Hanger: 16 ga. steel, 1 x 4-1/8 with slots for #10 screws; mounts canopy to customer ceiling box.
- Stem tubing: Four aluminum tubes, 5/8" O.D. x 12", black anodized; connected with aluminum couplings.
- Nipples: 1/8" I.P.S. brass plated steel.
- Switch housing: 20 ga. steel, black anodized.
- Hood: Spun from .051 aluminum; powder coat finish.
- Units shipped partially assembled.
- Install on 4" standard ceiling box.
- Do not mount closer than 16" above non-metallic surface for 250 Watts.

**ELECTRICAL COMPONENTS:**

- Toggle switch.
- Socket: Porcelain.
- Lamp: 250 Watts, red.

**POWER REQUIREMENTS:**

- 250 Watts, 120 Volts, 60 Hz., single phase, 2 Amps., 15 Amp. service.

**SHORT FORM SPECIFICATIONS**

Cres Cor Rigid Stem Ceiling Mounted Infra Red Warmer Model IFW-64-10. Hood .051 spun aluminum; powder coat finish (color: \_\_\_\_\_). Four 5/8" O.D. 12" aluminum tubes. 250 Watts, 120 Volts, 60 Hz., 1 Phase, 15 Amp. service. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_  
\_\_\_\_\_. NSF, CSA-US, CSA-C listed.