

LOW TEMP FREEZER (-15°F)

Model: 1F-LT-HD

1-Section Reach-In Low Temp Freezer with Half Doors

1F-LT-HD - Stainless steel front, aluminum end panels and interior
1F-LT-SA-HD - Stainless steel exterior, aluminum interior
1F-LT-SS-HD - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|---|
| Stainless steel case back | Pass-Thru (consult factory) |
| Additional epoxy-coated steel shelves | Shallow depth (consult factory) |
| Chrome or stainless steel shelves | Hinged glass doors |
| Heavy-duty pilaster strips | Increased refrigeration systems |
| Rehinging of doors (consult factory) | Special electrical req. (consult factory) |
| Pan slide assemblies | Correctional Facility Options |
| Adjustable legs | • One way security screws |
| Digital thermometer | • Locking hasp (lock not included) |
| Custom laminates | • Stainless steel mesh cover |
| Full door | • Coverless hinges |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant
Self contained, performance-rated refrigeration system
Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handles
Cam action, lift off hinges
Self-closing doors
Magnetic snap-in door gaskets
Cylinder lock in door
Heavy-duty, epoxy-coated steel shelves
5" casters

MODEL FEATURES

Thermal expansion valve
LED interior lighting
External dial thermometer
Energy saving switch for door heaters
Automatic electric defrost

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cu. ft.) | 20 (566 cu l) |
| Width, Overall (in.) | 26 (660 mm) |
| Depth, Overall (in.) (incl. handles) | 35 3/8 (899 mm) |
| Depth [less doors] (in.) | 32 (813 mm) |
| Depth [doors open 90°] (in.) | 55 1/2 (1410 mm) |
| Clear Door Width (in.) | 19 3/8 (492 mm) |
| Clear Half Door Height (in.) | 27 1/2 (699 mm) |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2096 mm) |
| No. of Doors | 2 |
| No. of Shelves | 3 |
| Shelf Area (sq. ft.) | 20.4 (1.9 sq m) |
| Tray Slide Capacity (per half section) | 11 |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 3/4 |
| Capacity (BTU/Hr)* | 2050 |

ELECTRICAL DATA

| | |
|---------------------------|--------------------------------|
| Voltage (int'l) | 115/208-230/60/1 (220/50/1) |
| Feed Wires (incl. ground) | 4 |
| Total Amps (int'l) | 10.6 (4.4) |
| Defrost Amps (int'l) | 5.2 (2.6) |
| 10 ft. Cord/Plug (int'l) | No (No) |



SHIPPING DATA

| | |
|------------------------------|------------------|
| Height - Crated (in.) | 85 1/2 (2172 mm) |
| Width - Crated (in.) | 31 5/8 (803 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |
| Volume - Crated (cu. ft.) | 65 (1841 cu l) |
| Weight Std - Crated (lbs.) | 450 (204 kg) |
| Weight SS - Crated (lbs.) | 510 (231 kg) |
| Weight Std - Uncrated (lbs.) | 350 (159 kg) |
| Weight SS - Uncrated (lbs.) | 410 (186 kg) |

* Rating @ -30°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

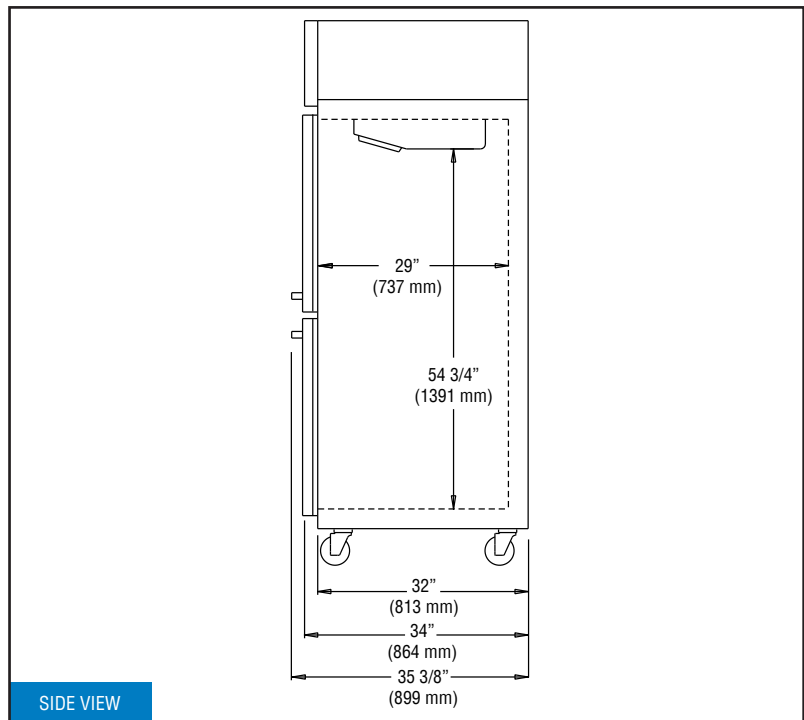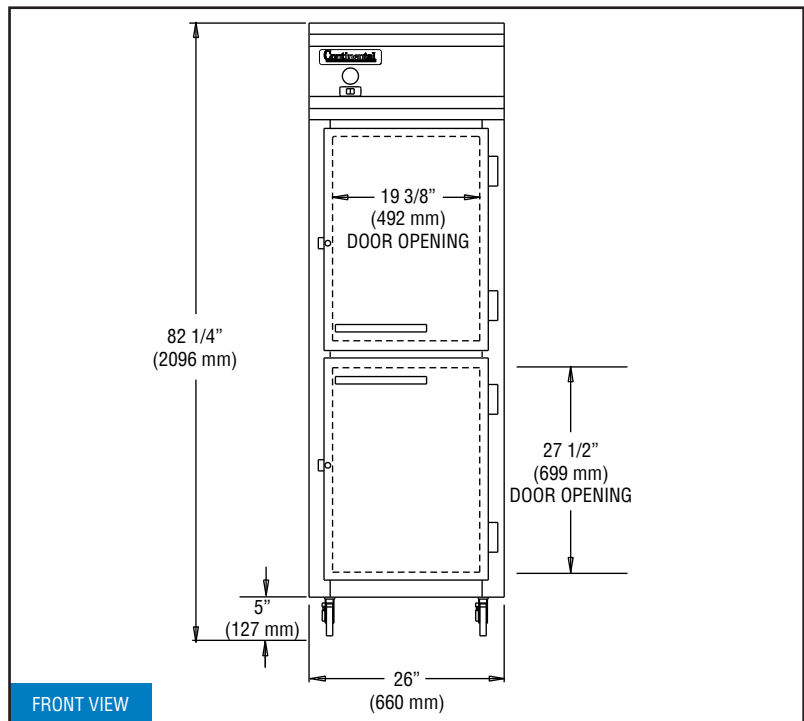

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12\"

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2016. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.