LOW TEMP FREEZER (-15°F)

Model: 3FE-LT-HD

3-Section Extra-Wide Reach-In Low Temp Freezer with Half Doors

3FE-LT-HD - Stainless steel front, aluminum end panels and interior

3FE-LT-SA-HD - Stainless steel exterior, aluminum interior

3FE-LT-SS-HD - Stainless steel exterior and interior

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

(-	
Stainless steel case back	Pass-Thru (consult factory)
Additional epoxy-coated steel shelves	Shallow depth (consult factory)
Chrome or stainless steel shelves	Hinged glass doors
Heavy-duty pilaster strips	Increased refrigeration systems
Rehinging of doors (consult factory)	Special electrical req. (consult factory)
Pan slide assemblies	Correctional Facility Options
Adjustable legs	One way security screws
Digital thermometer	Locking hasp (lock not included)
Custom laminates	Stainless steel mesh cover
Full doors	Coverless hinges

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

Thermal expansion valve

LED interior lighting

External dial thermometer

Energy saving switch for door heaters

Automatic electric defrost

APPROVAL:

DIMENSIONAL DATA

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	73 (2067 cu I)
Width, Overall (in.)	85 1/2 (2172 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	58 (1473 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Hlaf Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	85 3/4 (2178 mm)
No. of Doors	6
No. of Shelves	9
Shelf Area (sq. ft.)	61.2 (5.7 sq m)
Tray Slide Capacity (per half section)	11
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	2
0 ()	
Capacity (BTU/Hr)*	6300
	6300
Capacity (BTU/Hr)*	6300 115/208-230/60/1 (220/50/1)
Capacity (BTU/Hr)* ELECTRICAL DATA	115/208-230/60/1
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l)	115/208-230/60/1 (220/50/1)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground)	115/208-230/60/1 (220/50/1)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground) Total Amps (int'l)	115/208-230/60/1 (220/50/1) 4 20.0 (11.0)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground) Total Amps (int'l) Defrost Amps (int'l)	115/208-230/60/1 (220/50/1) 4 20.0 (11.0) 10.4 (5.2)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground) Total Amps (int'l) Defrost Amps (int'l) 10 ft. Cord/Plug (int'l)	115/208-230/60/1 (220/50/1) 4 20.0 (11.0) 10.4 (5.2)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground) Total Amps (int'l) Defrost Amps (int'l) 10 ft. Cord/Plug (int'l) SHIPPING DATA	115/208-230/60/1 (220/50/1) 4 20.0 (11.0) 10.4 (5.2) No (No)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground) Total Amps (int'l) Defrost Amps (int'l) 10 ft. Cord/Plug (int'l) SHIPPING DATA Height - Crated (in.)	115/208-230/60/1 (220/50/1) 4 20.0 (11.0) 10.4 (5.2) No (No) 85 1/2 (2172 mm)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground) Total Amps (int'l) Defrost Amps (int'l) 10 ft. Cord/Plug (int'l) SHIPPING DATA Height - Crated (in.) Width - Crated (in.)	115/208-230/60/1 (220/50/1) 4 20.0 (11.0) 10.4 (5.2) No (No) 85 1/2 (2172 mm) 90 (2286 mm)
Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Feed Wires (incl. ground) Total Amps (int'l) Defrost Amps (int'l) 10 ft. Cord/Plug (int'l) SHIPPING DATA Height - Crated (in.) Width - Crated (in.) Depth - Crated (in.)	115/208-230/60/1 (220/50/1) 4 20.0 (11.0) 10.4 (5.2) No (No) 85 1/2 (2172 mm) 90 (2286 mm) 42 (1067 mm)

^{*} Rating @ -30°F evaporator, 90°F ambient

Weight Std - Uncrated (lbs.)

Weight SS - Uncrated (lbs.)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

640 (290 kg)

755 (342 kg)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2016. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

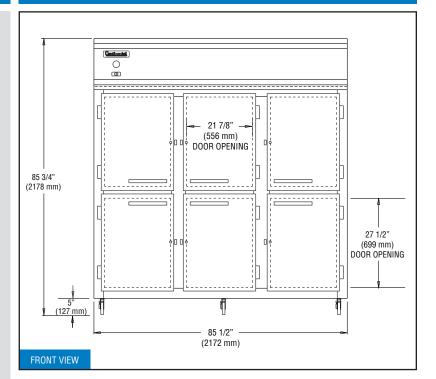

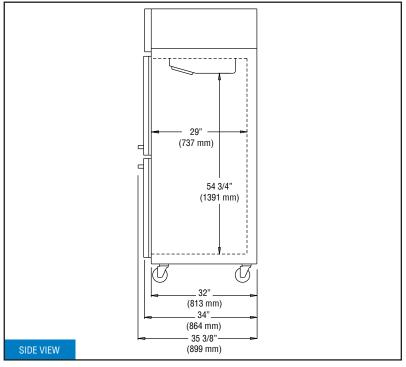

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.