

# DESIGNER LINE REFRIGERATOR

## Model: D2REN

Natural Refrigerant R-290 Model

*Designer Line*

## 2-Section Extra-Wide Reach-In Refrigerator



ENERGY STAR® Qualified Commercial Refrigerator

- D2REN** - Stainless steel front, aluminum end panels and interior
- D2RENSA** - Stainless steel exterior, aluminum interior
- D2RENSS** - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

|                                      |  |
|--------------------------------------|--|
| Stainless steel case back            | Shallow depth  |
| Add'l epoxy-coated steel shelves     | Hinged glass doors   |
| Chrome or stainless steel shelves    | Special electrical req. (consult factory)  |
| Rehinging of doors (consult factory) | <b>Correctional Facility Options</b>   |
| Pan slide assemblies                 | <ul style="list-style-type: none"> <li>• One way security screws</li> </ul>          |
| Wine rack                            | <ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul> |
| Casters                              | <ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>       |
| Custom laminates                     | <ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>                 |
| Half doors                           |  |

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

#### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Heavy-duty, epoxy-coated steel shelves

Adjustable 6" stainless steel legs

#### MODEL FEATURES

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                       |                  |
|---------------------------------------|------------------|
| Net Capacity (cu. ft.)                | 52 (1472 cu l)   |
| Width, Overall (in.)                  | 57 (1448 mm)     |
| Depth, Overall (in.) (incl. handles)  | 35 3/8 (899 mm)  |
| Depth (in.) (less doors)              | 32 (813 mm)      |
| Depth (in.) (doors open 90°)          | 58 (1473 mm)     |
| Clear Door Width (in.)                | 21 7/8 (556 mm)  |
| Clear Door Height (in.)               | 58 5/8 (1489 mm) |
| Height, Overall (in.) (incl. 6" legs) | 83 1/4 (2115 mm) |
| No. of Doors                          | 2                |
| No. of Shelves                        | 6                |
| Shelf Area (sq. ft.)                  | 40.8 (3.8 sq m)  |
| Tray Slide Capacity (per section)     | 24               |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3+ |
| Capacity (BTU/Hr)*          | 2560 |

### ELECTRICAL DATA

|                                     |                     |
|-------------------------------------|---------------------|
| Voltage (int'l)                     | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground)           | 3                   |
| Total Amps (int'l)                  | 6.9 (4.9)           |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No)            |

### SHIPPING DATA

|                            |                  |
|----------------------------|------------------|
| Height - Crated (in.)      | 85 1/2 (2172 mm) |
| Width - Crated (in.)       | 64 (1626 mm)     |
| Depth - Crated (in.)       | 42 (1067 mm)     |
| Volume - Crated (cu. ft.)  | 133 (3766 cu l)  |
| Weight Std - Crated (lbs.) | 575 (261 kg)     |
| Weight SS - Crated (lbs.)  | 605 (274 kg)     |

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)



Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2019, Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

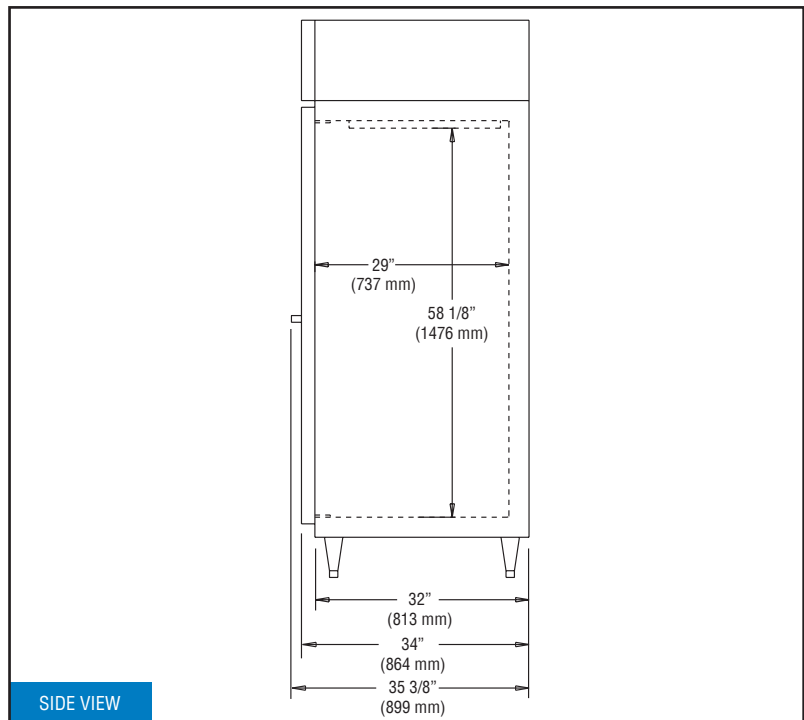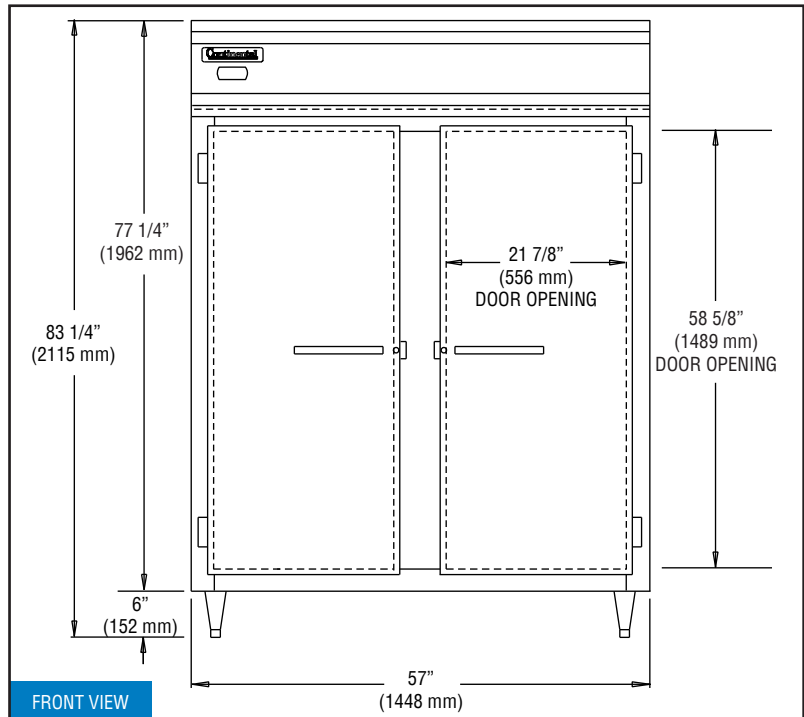

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.