

Continental

Designer-line
DUAL TEMPS

Refrigerator

SHALLOW DEPTH
SIDE BY SIDE
DUAL TEMPS

Utilizing Environmentally Safe, CFC-free R-134a & R-404A Refrigerant

Standard Depth & Extra Wide



DL2RFS-SS

Standard (S/S Front, Aluminum Ends & Interior)
Suffix SA (S/S Exterior, Aluminum Interior)
Suffix SS (S/S Exterior & Interior)

Standard Features

- Modern, State-of-the-Art Styling
- Performance Rate "Plug" Refrigeration Systems
- 3" Non-CFC Polyurethane Foam Insulation
- Chrome-Plated Flow Line Handles
- Cam-Action Lift-Off Hinges
- Self-Closing Doors
- Magnetic Snap-In Gaskets
- Cylinder Lock In Each Door
- Automatic Hot Gas Condensate Evaporator
- Adjustable 6" Stainless Steel Legs
- External Digital Thermometers
- Automatic Electric Defrost on Freezer System
- Automatic Interior Lighting

Optional Features & Accessories

- Half-Door
- Remote
- Stainless Steel Shelves
- Consult Factory
- Pass-Thru
- Casters
- Correctional Facility Package

REFRIGERATION SYSTEM

Two "performance rated", air cooled hermetically sealed, capillary type refrigeration systems are installed on top of each dual temp. Plasticized fin coil and air circulating fans are contained within each concealed "plug" type insulated housing, readily accessible on the top of the cabinet and separate from each food zone to increase food storage capacity. Both "plug" systems are fully charged with refrigerant and mounted on a sturdy steel, rail-type base which can be easily removed. Refrigerator sections are designed to maintain 38° to 40° Fahrenheit (3° to 5° Centigrade), and Freezer sections 0° Fahrenheit (-18° Centigrade) while operating with an unrestricted air supply in a maximum ambient temperature of 100° Fahrenheit. Freezer "Plug" systems have an automatic electric defrost timer which initiates defrost cycles at predetermined intervals. All condensate water is evaporated by an automatic, non-electric, corrosion-resistant condensate evaporator. A strict quality-assurance team inspects all materials and components to certify that each model conforms to the most exacting standards. All models are factory performance tested for a minimum of 16 hours prior to crating.

CABINET CONSTRUCTION

All materials are of top quality, assembled to conform with strict quality-assurance requirements. The cabinet front and doors are constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminates overlapping panels with raw edges. Cabinet body, doors and plug are insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3" to ensure increased energy efficiency. Full-length louvered air grille located above the doors allows equal air circulation to the condensing unit. Easily removable, low-wattage, anti-sweat door heaters concealed by a non-metallic, non-conductive, high-impact thermal breaker strip eliminate condensate build-up on the cabinet front. Automatic interior lighting is controlled by door openings. Cabinets are equipped with 6-inch adjustable stainless steel legs.

SHELVING

Shelves are designed for heavy-duty use with .306" diameter frame and brace members and .140" diameter fill wires spaced 3/4" apart. Shelves are welded steel and epoxy-coated for a durable, long, rust-free service life. Adjustments are in 1/2" increments and a wide door opening allows the use of a variety of optional pan and tray slide types.

DOOR CONSTRUCTION


Door shells are constructed of heavy gauge stainless steel and are internally braced and urethane-foamed-insulated for rigidity. Door corners are of welded construction and polished. Replaceable snap-in gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam action, lift-off type featuring positive safety stop at 120°.





DUAL TEMPS

CHARACTERISTICS	DL2RF-SS	DL2RFE-SS
DIMENSIONAL DATA		
Net Capacity (cu. ft.)	21/21	22/22
Width, Overall (in.)	52	57
Depth, Overall (Incl. Hdls.) (in.)	29½	29½
Depth (Less Door(s)) (in.)	26	26
Depth (Doors(s) Open 90°) (in.)	49⅝	51⅞
Clear Door Width (in.)	19⅝	19⅝
Clear Full-Door Height (in.)	58⅝	58⅝
Clear Half-Door Height (in.)	27½	27½
Height, Overall (Inc. 6" Legs)(in.)	83¼	83¼
No. of Full Door(s)	2	2
No. of Half Door(s)	4	4
No. of Shelves	6	6
Shelf Area (sq. ft.)	20.4/20.4	20.4/20.4

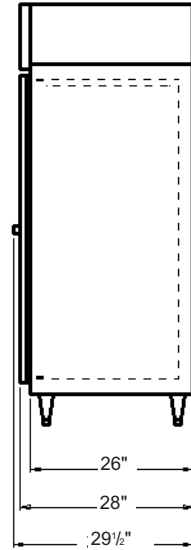

SIDE VIEW

REFRIGERATION DATA


Condensing Unit Size (H.P.)	¼, ⅓	¼, ⅓
Capacity (BTU/hr)**	1940/1590	1940/1590

ELECTRICAL DATA

Cabinet Specifications	115/60/1	115/60/1
Feed Wires (Incl. Ground)	3/3	3/3
Condensing Unit Specs.	115/60/1	115/60/1
Total Amperes	6.9/7.6	6.9/7.6
Defrost Amperes	4.3	4.3
Power Supply Cord	yes	yes

SHIPPING DATA

Height – crated (in.)	85½	85½
Width – crated (in.)	55	64
Depth – crated (in.)	37	37
Volume – crated (cu.ft.)	97	133
Weight Std – crated (lbs.)	630	630
Weight SS – crated (lbs.)	710	710
Weight Std – uncrated (lbs.)	460	460
Weight SS – uncrated (lbs.)	380	380

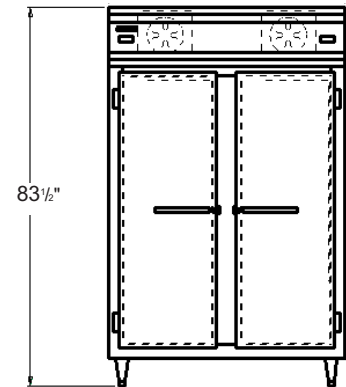

DL2RFS/DL2RFES

*Rating @ +25°F Evaporator, 90° Ambient (Refrigerator)

*Rating @ -15°F Evaporator, 90° Ambient (Freezer)

Note: All Specifications subject to change without notice.

Note: If the cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" required.

Cabinet upper side panels and refrigeration plug systems can be easily removed and reinstalled at installation site where space limitations are confining.