

# HANDLE OPERATED COFFEE BREWER

## CBS-5000 Series

### CBS-51H-15

Single 1.5 Gallon Brewer



Shown with LUXUS® Portable Thermal Dispenser (TPD-15)

The CBS-5000 Series was designed for simplicity. The Handle Operated Series brewers save the operator time and effort by delivering quick and consistent results from your pre-programmed coffee recipe. It is the reliable choice for serving high-volumes of single batch coffee all day long.



**Handle operation — a quick start!**

Simply twist the handle to begin the brew cycle and in minutes your perfectly brewed coffee is ready to serve.



**Manual water faucet.**

Safely dispense hot water away from steam and brew basket.



**Set it and forget it.**

Program your recipe once and this brewer delivers consistent and repeatable results.

**FETCO®**  
TRUSTED | RELIABLE | QUALITY

## Water Specification

**Water Inlet**  
3/8" male flare fitting

**Minimum Flow Rate**  
1/2 gpm [1.9 lpm]

**Water Pressure**  
20-75 psig [138-517 kPa]


## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
<b>US &amp; CANADA</b>								
C51016	1 x 1.8 kW	120	1	2+G	1.9	Terminal Block	15.8	4.5 [17.0] <sup>(1)</sup>
C51026	1 x 3.0 kW	120/208-240	1	3+G	2.3-3.1	Terminal Block	11.2-12.9	6.0 [22.7] <sup>(1)</sup>
C51036	1 x 4.0 kW	120/208-240	1	3+G	3.1-4.1	Terminal Block	14.8-17.1	7.5-10.5 [28.4-39.7] <sup>(1)</sup>
C51046	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Terminal Block	22.0-25.4	10.5-15.0 [39.7-56.8] <sup>(1)</sup>
C51056	2 x 4.0 kW	120/208-240	1	3+G	6.1-8.1	Terminal Block	29.3-33.8	15.0-19.5 [56.8-73.8] <sup>(1)</sup>
<b>INTERNATIONAL</b>								
C51106	1 x 4.0 kW	220-240	1	2+G	3.5-4.1	Terminal Block	15.7-17.1	9.0-10.5 [34.1-39.7] <sup>(1)</sup>
C51116	2 x 3.0 kW	220-240	1	2+G	5.1-6.1	Terminal Block	23.3-25.4	13.5-15.0 [51.1-56.8] <sup>(1)</sup>
C51126	2 x 3.0 kW	440-480	1	2+G	5.1	Terminal Block	11.6-12.7	13.5-15.0 [51.1-56.8] <sup>(1)</sup>

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.

## Measurements

<b>Height</b> 36" [91.4 cm]	<b>Width</b> 12" [30.5 cm]	<b>Depth</b> 16" [40.6 cm]	<b>Empty Weight</b> 55 lbs [24.9 kg]	<b>Filled Weight</b> 86 lbs [39.0 kg]	<b>Shipping Weight</b> 66 lbs [29.9 kg]	<b>Shipping Dimensions:</b> 35" x 14" x 23" [88.9 x 35.6 x 58.4 cm]
--------------------------------	-------------------------------	-------------------------------	---	--	--	--

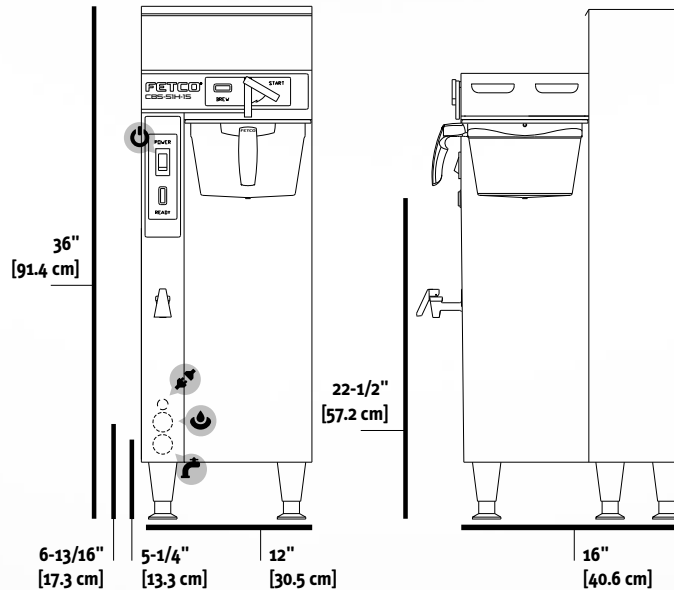

- Electrical Connector
- Tank Drain
- Water Inlet
- On / Off Switch



## Compatible Dispensers

1.5 Gallon LUXUS® Thermal Server (L4S-15) Must be used with S4S Serving Stations.	D452
1.5 Gallon LUXUS® Thermal Dispenser (L4D-15)	D449
1.5 Gallon LUXUS® Portable Thermal Dispenser (TPD-15)	D009

## Customize Your Brewer

Single Serving Station for L4S-15/20 Server	A150
Twin Serving Station for L4S-15/20 Server	A151
Triple Serving Station for L4S-15/20 Server	A152
Identifier Plates, Acrylic	A069
Hot Tea Infuser (1.5 Gallon Size)	A113
Drip Tray - Square	A137

## Cups per Hour\*

8oz. <b>238</b>	12oz. <b>159</b>	16oz. <b>119</b>	20oz. <b>95</b>
-----------------	------------------	------------------	-----------------

\* Approximate based on maximum power setting.

## Paper Coffee Filters

15" x 5.5" (500/Case)	F001
-----------------------	------

## Information

fetco.com

info@fetco.com

847.719.3000  
1.800.338.2699 USA  
 847.719.3001

Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA