

BUNN®

Infusion Series® ICB Twin Low Profile Coffee Brewer

Achieve a variety of flavor profiles and batch options with programmable Digital Brewer Control

23.1" x 20.0" x 23.8"
(58.7cm x 50.8cm x 60.5cm)

Medium/High Volume
280 8oz (236mL) cups/hour*



- Ideal for the quick serve restaurant, full service restaurant, lodging/hospitality, college and university, amusement and leisure, office system, convenience store and specialty retail/bar environments
- Brews up to 280 8oz (236mL) cups per hour
- BrewWISE® intelligence means the Smart Funnel® manages the grinding and brewing process from start to finish
- Low profile styling to accommodate a variety of spaces
- Brews into 1gal (3.8L) baseless ThermoFresh® servers for easy transport of coffee to other locations
- Large 5.6gal (21.2L) tank provides back-to-back brewing capacity
- Each side has 3 brew buttons, allowing for 3 separate brewing profiles; two programmable batch buttons allow full and half batch brewing for maximum flexibility
- Easy pulse interface allows automatic programming of pulse routine
- Digital temperature control, pre infusion, pulse brew and cold brew lockout
- Digital display in English/Spanish for easier programming and control; advertising messages and machine status also displayed; display capable of showing English or Metric measurements
- Compatible with BUNNlink®
- Hot water faucet kit included to allow for mounting on side of trunk or on upper control panel

 **ThermoFresh® Servers sold separately**

RESPECT EARTH® COMPONENTS

- Energy-saver mode reduces tank temperature during idle periods
- Low Lead Certified
- RoHS compliant: electronics design contains no hazardous substances and part assemblies are recyclable wherever possible

RELATED PRODUCTS

39000.0004	Easy Clear® EQHP-10L
39000.0001	Easy Clear® EQHP-10L
20138.1000	Paper Filters
42700.0050	1gal DSG2 TF Server
39795.0003	TF Server Stand
39795.0001	2 Position TF Server Stand
49523.0000	Booster Kit (to make compatible with 1.5gal TF servers)







Description					Capacity*	Electrical Requirements					Shipping		Agency
Model	Product #	Finish	Funnel Type	Spray Head Type	8oz cups/hr 236mL cups/hr	Volts	Amps	Watts	Cord Attached	Plug Type	Ft³ M³	Lbs kgs	Listing
ICB-TWIN LP	37600.0012	stainless	Smart	lime tolerant	280	120/240	25	6000	no	N/A	12.06 .34	76.1 34.5	 

Compatible dispensers - 1gal baseless ThermoFresh® servers

A3.5d
06/14

*Capacity: based upon incoming water temp of 60°F/15.5°C (140°F/68°C rise)

www.bunn.com/products/thermal/icb_twin_lp.html

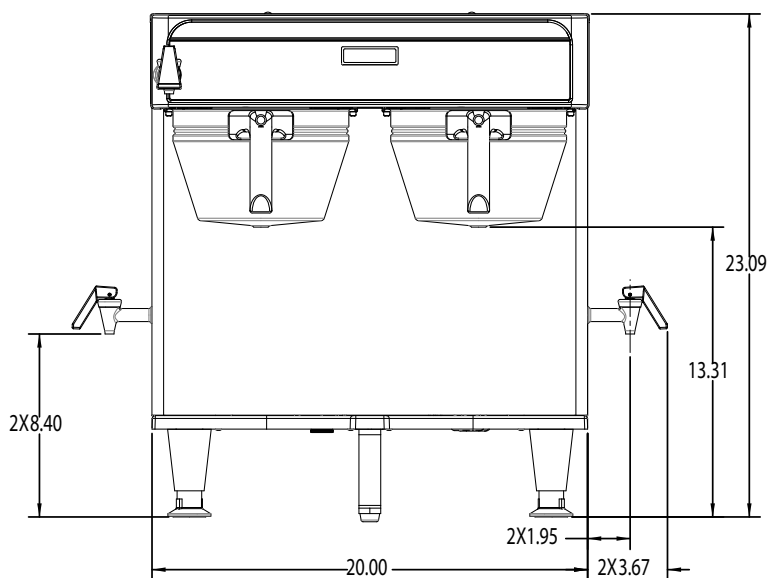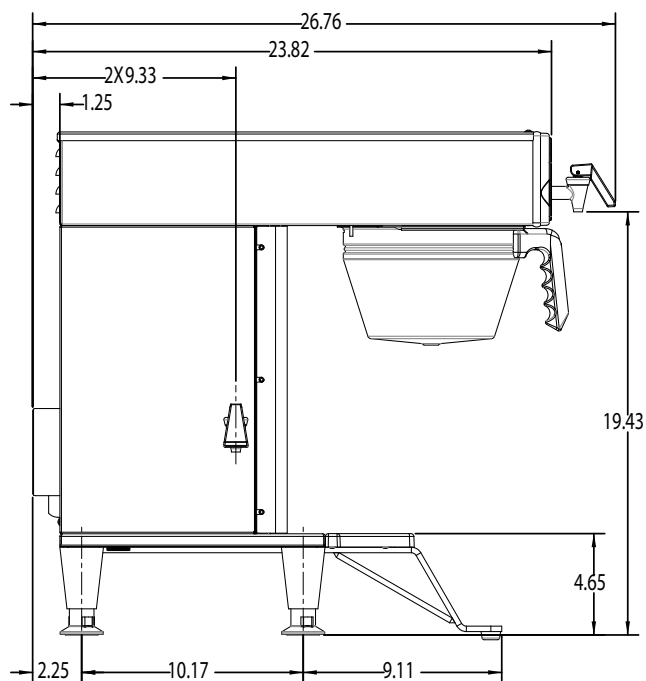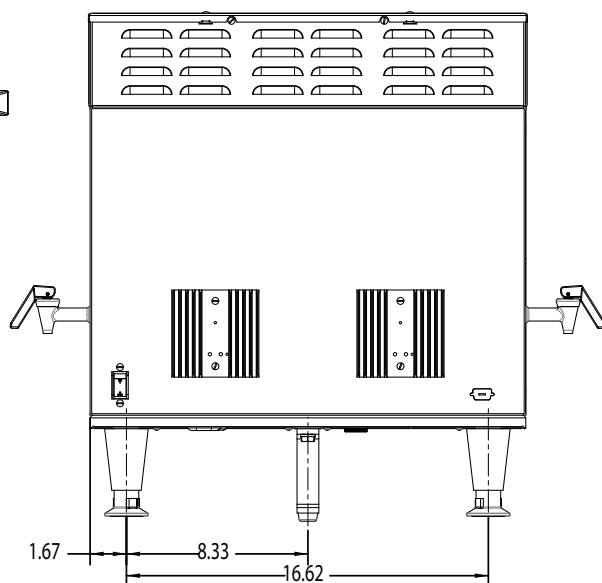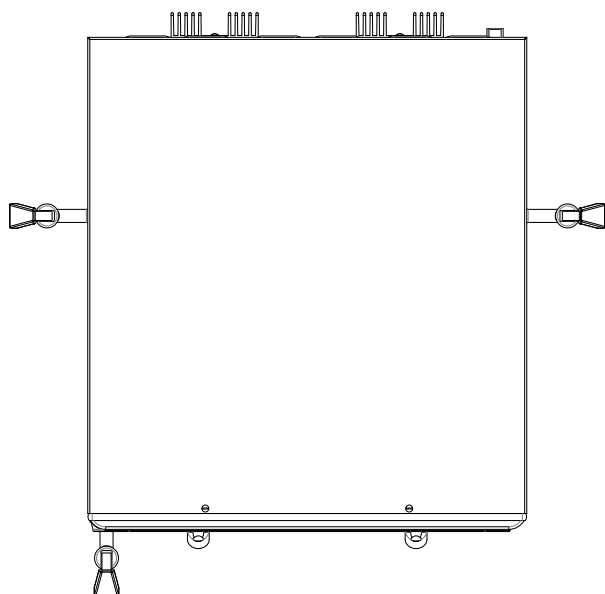

CAD Formats Available

2D Revit KCL

✓

Electrical Requirements

Volts	Phase	# Wires plus Ground	Hertz
240	1	3	60

Plumbing Requirements

PSI	Fitting Supplied	Water Flow Required (GPM)
20-90	3/8" male flare	1.5

RECOMMENDED WARRANTY PARTS

To see illustrated parts manuals, visit bunn.com/support/manuals

45787.1003 CBA, INFUSION
 26846.0000 VALVE ASSY, SPRAYHEAD-120V
 27370.0003 VALVE ASSY, BYPASS-PLSTC 120V
 42025.0000 KIT, 120V VALVE AND LIT
 29329.1000 LIMIT THERMOSTAT KIT
 37875.0000 SWITCH MEMBRANE ICB TWIN
 29485.1006 HEATER, TANK 3000W 240V

34307.1001 TRANSFORMER, 10VA 120 TO 12V
 07412.1002 PROBE REPLACEMENT KIT (ITCB)
 39085.1001 KIT, PROBE ASSY, TEMP&DRY PLUG 10.5
 40670.0009 SPRAYHEAD, TERRACOTTA .221 17 HOLE WIDE
 38894.0001 SWITCH, 125/250V 50A DBL POLE
 12565.0034 TRIAC ASSY, 40 AMP INFUSION

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com. All dimensions shown in inches.