

Fusion

Product Specifications

ITEM NO: _____
PROJECT: _____
DATE: _____

Refrigerated Prep Case with Refrigerated Rear Storage

- ☐ FSPS48
- ☐ FSPS72

Lengths include end panels
48-1/8"L x 39-3/4"D x 42-1/4"H
72-1/8"L x 39-3/4"D x 42-1/4"H



MODEL SHOWN: FSPS72

NOTE: INTERIOR PANS NOT PROVIDED W/CASE
FSPS48 HOLDS (3) FULL SIZE 4"D PANS - FSPS72 = (5)

STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Casters w/ levelers (n/a w/ remote ref.)
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Condiment pan support rails
- Curved single pane, lift-up front glass w/o lock
- Integrated average product temperature of 40°F or less
- NOTE: Pans not supplied with case.
- NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs.
- One year parts & labor; 5 year compressor warranty
- Refrigerated rear storage (w/doors)
- Stainless steel interior

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel
TRIM COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Silver
REAR WORK LEDGE	<input type="checkbox"/> White Sanalite®	<input type="checkbox"/> Richlite® Black <input type="checkbox"/> Richlite® Brown
TOE KICK	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel
ELECTRICAL CONNECT	<input type="checkbox"/> 6' straight blade power cord (self-cont.)	<input type="checkbox"/> 6' locking power cord (self-cont.) <input type="checkbox"/> Electrical leads (remote)
REFRIGERATION	<input type="checkbox"/> Breeze™ w/EnergyWise s/c refrigeration	<input type="checkbox"/> NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs. <input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		<input type="checkbox"/> Second year parts & labor warranty (excludes compressor)
ACCESSORIES		<input type="checkbox"/> Stainless steel condiment pans w/covers



Fusion

Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Integrated Prod Temp ° F
All	Unpackaged refrigerated products	40

PLAN VIEW

SIDE VIEW

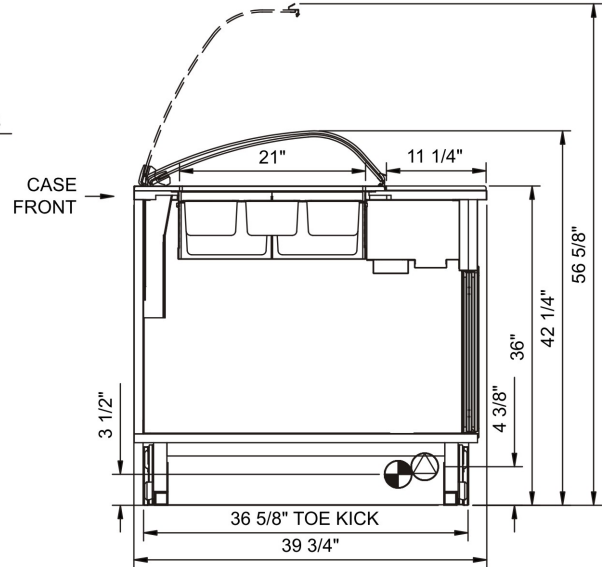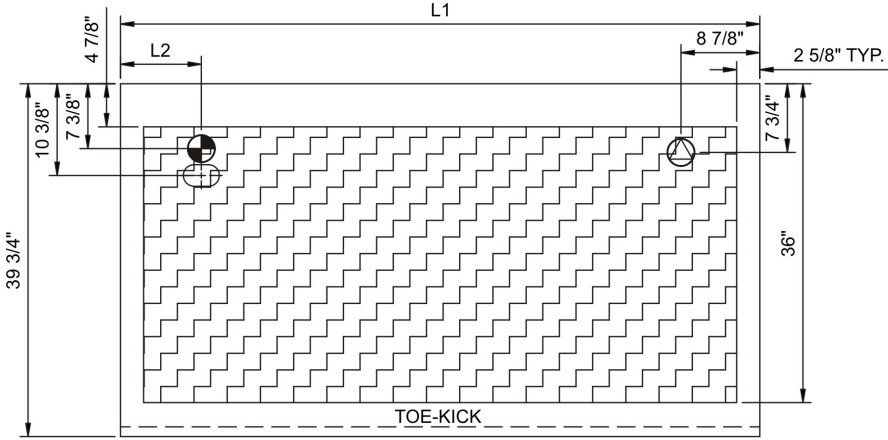

Note: Condensation may occur in operating conditions outside of the intended 75°F, 55% humidity conditions.

WELL CAPACITY
PANS NOT PROVIDED WITH UNIT
FSPS48 = 3-FULL SIZE 4" DEEP PANS
FSPS72 = 5-FULL SIZE 4" DEEP PANS

NOTE: ALL DIMENSIONS APPROXIMATE

⊕ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
 ⊖ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
 ⊖ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

⊕ SELF-CONTAINED CASE SERVICE ACCESS AREA.
 ⊖ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications													
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST
FSPS48	N/A	48.13	9.13	Remote(Type I)	Circuit #1	110-120	1	60	1.17	117	2+G	Leads Multiple	20.00
				Self-Contained	Circuit #1	110-120	1	60	11.93	1,176	2+G	5-15P or L5-15P	N/A
FSPS72	N/A	72.13	9.13	Remote(Type I)	Circuit #1	110-120	1	60	1.33	135	2+G	Leads Multiple	20.00
				Self-Contained	Circuit #1	110-120	1	60	13.89	1,327	2+G	5-15P or L5-15P	N/A

*** Does not include electric defrost on freezer models.

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant