

HW-106D BUILT-IN ROUND COOK 'N HOLD WARMER

HW-106D BUILT-IN ROUND COOK 'N HOLD WARMER



Specifications

Overall Dimensions:	Inches	MM
Diameter	12	305
Temperature Range:	Fahrenheit	Celsius
HW-106D	90° to 210°	32° to 99°
Number of Thermostats:	1	
Weights:	Lbs.	KG
Installed	9	4
Shipping	12	5

Accessories / Options

Adapter Top, to convert HW-106D to hold one 4-quart inset, 20822

Adapter Top, to convert HW-106D to hold one 7-quart inset, 20175

Round Inset, 4-quart capacity with lid, 20774

Round Inset, 7-quart capacity with lid, 20587

Round Inset, 11-quart capacity with lid, 20908

Round Inset, 11-quart capacity with hinged lid, 21057

Wellslok Extension Kit, designed for countertops up to 1 1/2" thick, refer to installation instructions, 22592

Drain Valve Extension Kit, extension from drain to counter front with remote handle, 20385

Wells HW-106D Round Cook 'N Hold will quickly heat refrigerated food and hold it at serving temperature. A high wattage tubular immersion element provides efficient, uniform heat. The warming pan is capable of holding a standard 11-quart inset pan.

Features

- **The tubular element**, located inside the well, is controlled by a positive-off thermostat and allows for quick and efficient heating.
- **Control is recessed** in a one-piece, drawn, stainless steel panel to help prevent accidental temperature changes.
- **Warming pan is deep-drawn stainless steel** for maximum strength and durability and has a 1/2" drain.
- **Wellslok** provides quick and easy installation in stainless steel countertops.
- Designed for **wet operation only**.
- **The HW-106D Warmer** is Underwriters Laboratories, Inc. LISTED and meets NSF International and Canadian standards.
- **A one-year warranty** against defects covers parts and labor.




 LISTED
E6070

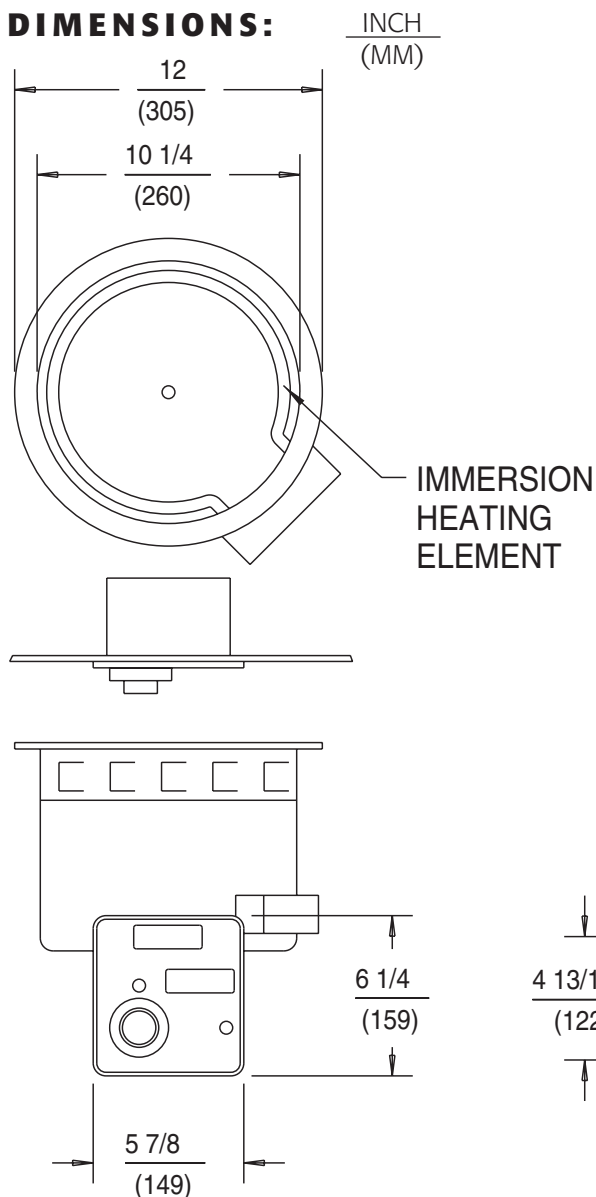

STD.4



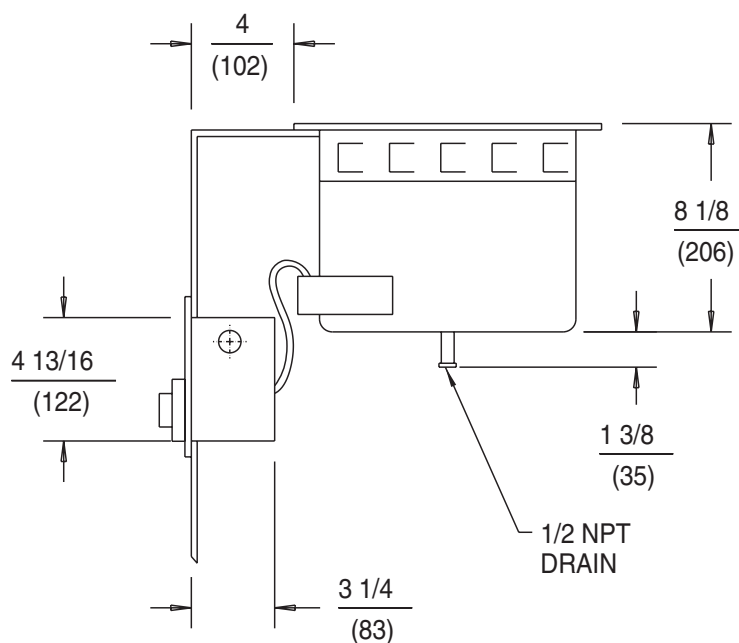
LR 10836

MODEL HW-106D BUILT-IN ROUND COOK 'N HOLD WARMER

DIMENSIONS:



MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT
3 (76)	3 (76)	1 (25)	4 (102)



HW-106D ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
HW-106D	120	1650	13.8	SINGLE	NONE
HW-106D	208	1240	6.0	SINGLE	NONE
HW-106D	240	1650	6.9	SINGLE	NONE

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.

WELLS MANUFACTURING COMPANY

2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972

FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com

2001 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 2/01 • REV(K) • PART NO. 37210

