



SS Series Glass Door Reach-In Refrigerators

MODEL #178SS1RGHC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

LED lighted interior saves energy by producing less heat and maximizes visibility for quick product retrieval.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing. Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

“No stoop” lower shelf raises product to a higher level for easy access.

SHELVING

3 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function. Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans. Interior back panel separates shelf and back wall to promote proper airflow.

WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



PROJECT: _____

MODEL: _____ SERIAL#: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

SS SERIES REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Glass door and interior light with on/off switch allow you to monitor product at a glance
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33-40°F
- 3 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/5 HP
- ETL Safety & Sanitation Listed



★ Conforms to UL & NSF-7 Standards



TECHNICAL DATA

Dimensions

Exterior Dimensions	29"W x 32¼"D x 82½"H
Interior Dimensions	24¾"W x 27⅞"D x 60¼"H
Net Volume	20.6 cu. ft.
Net Weight	282 lb.
Gross Weight	321 lb.
Packaging Dimensions	30¼"W x 34"D x 84½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 20⅞"W x 25⅜"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	2.6
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

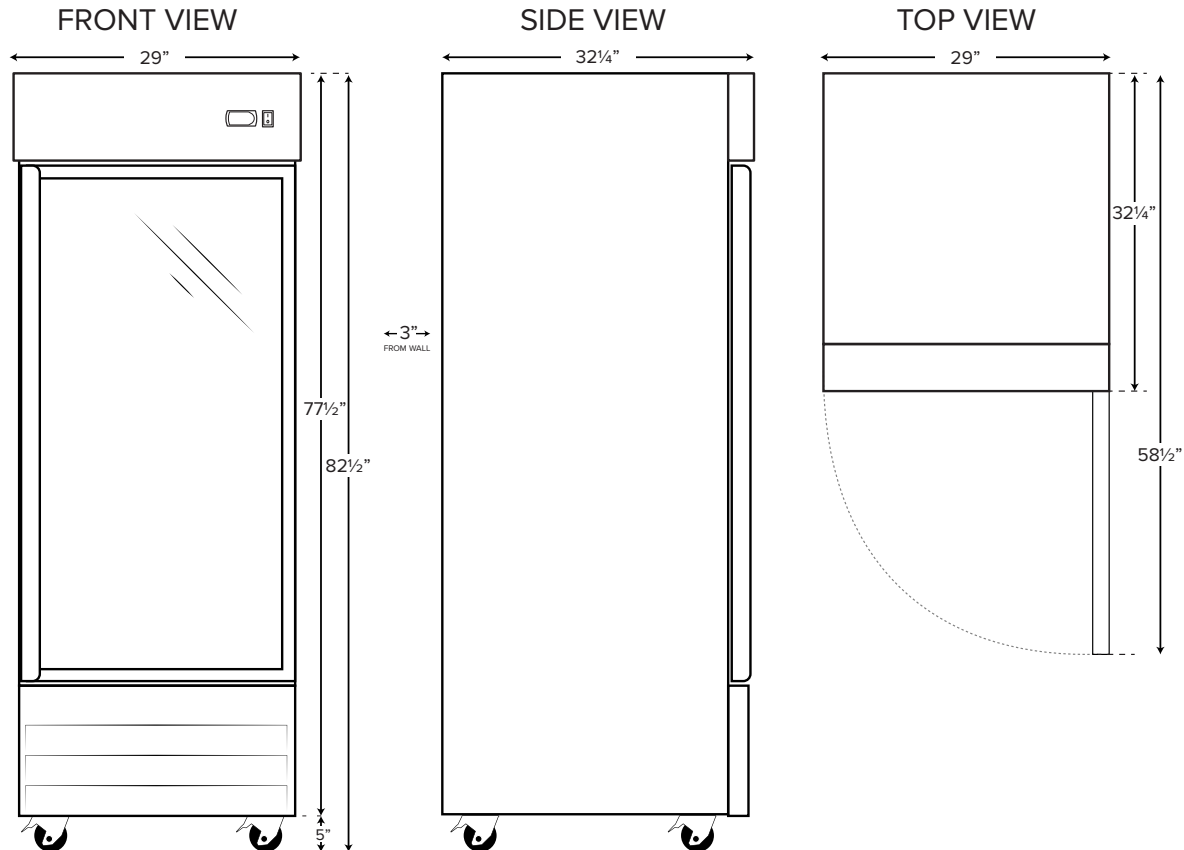

NEMA 5-15P