## BACK BAR EQUIPMENT

### Model: BB59SNSGD

Natural Refrigerant R-290 Model

# 59" Back Bar Display Cooler with Sliding Glass Doors Shallow Depth

Textured baked black enamel finish exterior, stainless steel countertop, interior back and side panels with reinforced stainless steel floor.



#### **Options and Accessories**

(upcharge and lead times may apply)

Add'l epoxy-coated shelves	Condensing unit on right
Stainless steel shelves	Wine rack
Food storage rated stainless steel interior (NSF-7)	Casters or legs
Riser base* (field installed)	Door lock

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2'

#### **Project Name:**

**Model Specified:** 

Location:

Item No: Quantity:

AIA #: SIS #:

#### **Standard Model Features**

#### REFRIGERATION SYSTEM

Performance-rated front breathing refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

#### **CABINET ARCHITECTURE**

High density, non-CFC polyurethane foamed-in-place insulation

Double pane, tempered low-e sliding glass doors

Front, rear and side venting louvered grills

Stainless steel reinforced threshold

#### **MODEL FEATURES**

Low profile cabinet design

Electronic controller w/digital display & hi-low alarm

LED interior lighting

Easily accessible and serviceable slide-out condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

#### **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	15 (425 cu I)
Width, Overall (in.)	59 (1499 mm)
Depth, Overall (in.) (incl. top & bumpers)	24 (610 mm)
Depth, Body Only (in.) (less doors)	21 (533 mm)

		- •		•	
Height, Ov	erall	(in.)		34 3/4 (88	3 mm)
Canacitus	# Dor			0	

Capacity: # Barrel Kegs 2
Capacity: # Straight Wall Kegs 2

Capacity: # Straight Wall Kegs 2
Capacity: # 1/6 Size Kegs 8

No. of Doors 2 No. of Shelves 4

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4	
Capacity (BTU/Hr)*	2025	

#### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	3.7 (3.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

Weight (lbs.)	395 (179 kg)
Height - Crated (in.)	46 (1168 mm)
Width - Crated (in.)	65 (1651 mm)
Depth - Crated (in.)	42 (1067 mm)

\* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest
whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.






© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

#### **Model Plan Views**

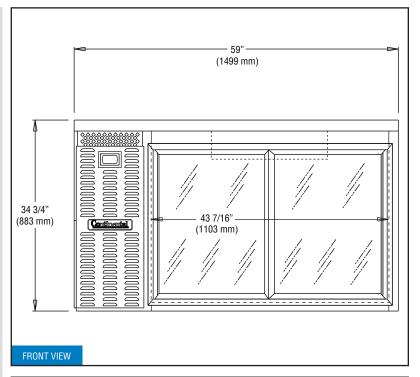

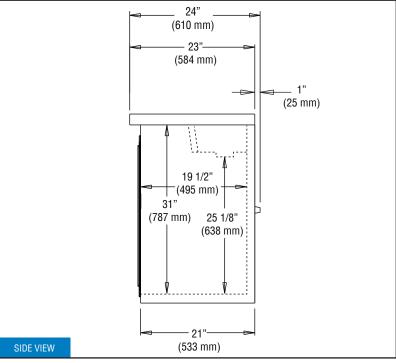

IMPORTANT NOTE: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet must not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.