

PLATINUM

SMART-HEAT™ ELECTRIC II



Colours

Black

White

Comfort without compromise...

The Platinum Smart-Heat™ Electric excels in efficiency, packing profound performance into a sleek package to suit high-end, style-centric settings. Designed specifically with low-clearance, semi-enclosed and aesthetically-focused spaces in mind, this heater minimizes light emission to blend seamlessly into rooflines with the aid of recess kits or stylishly mount to a number of other surfaces.



US0617PE

FEATURES

Tinted Glass-Ceramic Screen

The Platinum's signature screen spreads comfort evenly across an area while minimizing light emission

Wafer-Thin Design

Wall, ceiling and flush-mounting options allow subtle placement of this compact heater practically anywhere!

Subtle Aesthetics

Elegantly understated to create comfort while blending into the environment

Precise Directional Heating

Accurately alter coverage through simple bracket adjustment

Ultra-Durable Design

Stainless steel construction ensures reliable heating for years to come

Tight Space Specialist

Minimal vertical clearance requirements and a multitude of mounting options offers versatility to a variety of enclosed outdoor areas



Ease Of Use

Single switch activation and smart control compatibility creates set-and-forget simplicity



Wireless Control Capabilities

Genuine wireless control accessories allow seamless integration of remote heating output adjustment


BRACKET TYPES

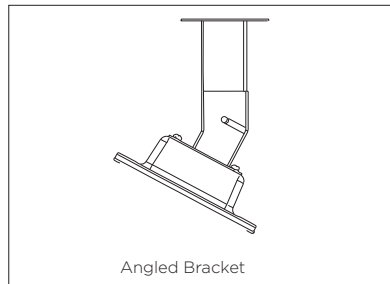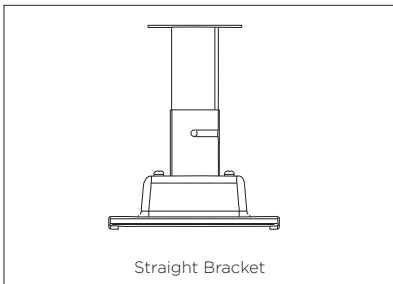

HEATING AREAS:

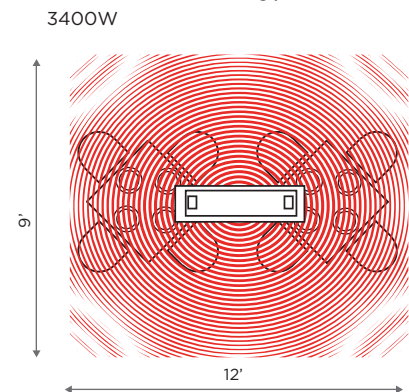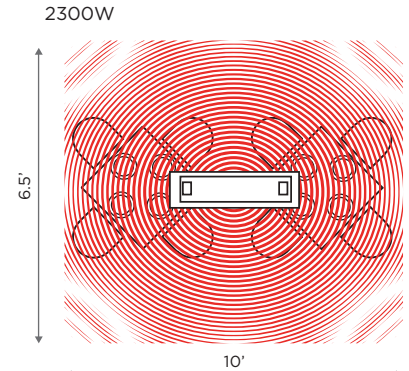

*Heat area dependent on ambient temperature and wind. Optimum conditions experienced at approx 60°F & in a low wind covered environment.

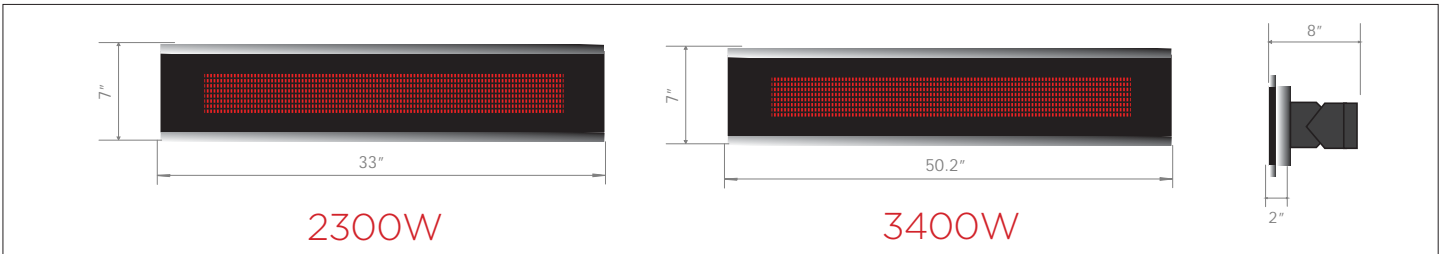

SPECIFICATIONS

Model		Platinum Smart-Heat™ Electric II	
Part No.	Black	BH0320003	BH0320005
	White	BH0320007	BH0320008
Heat Output (Watts)		2300W	3400W
Approximate area heated (ft ²)		65 ft ²	108 ft ²
Electrical connection		220-240V - A.C. - 50/60Hz - 9.6A	220-240V - A.C. - 50/60Hz - 14.2A
Dimension (WxDxH)		33" x 7" x 2"	50.2" x 7" x 2"
Min. distance to combustible materials ²		Side: 10"	Side: 18"
Mounting height requirement to ground ³		Wall Mount: 72"(6'), Ceiling Mount: 96"(8')	
Weight (lbs)		16.5 lbs	22 lbs
Finish		Brushed stainless steel AISI 304	
Approval		Intertek: 5001799	
<small>¹Must only be installed by a licensed technician. Must complete "Pre-Installation Checklist" before installing. ²The temperature will not exceed 65°C above the ambient temperature at specified distances. Please consult material manufacturer for temperature ratings and suitability. Bromic Heating takes no responsibility for material compliance. ³Installation must be performed in accordance with AS5601 installation code (or relevant standard) and must comply with any additional jurisdictional requirements. Bromic takes no responsibility for incorrect or non-compliant installations.</small>			

MINIMUM INSTALLATION CLEARANCES

