

COFFEE GUARDIAN RANGE



ST-2

COFFEE GUARDIAN ST-2 COFFEE GROUNDS REMOVAL EQUIPMENT

COFFEE GUARDIAN ST-2

Stainless Steel

Installed under barista / coffee machine

Prevents blockages

Filters coffee grounds

Easy to install

Compact



STAINLESS STEEL CONSTRUCTION DURABLE - RELIABLE - BUILT TO LAST

No More Pipe Blockages


**Keep Your Drains Clear From
Damaging Coffee Waste!**

From The Grease Guardian
Equipment Line



COFFEE GUARDIAN

ST-2

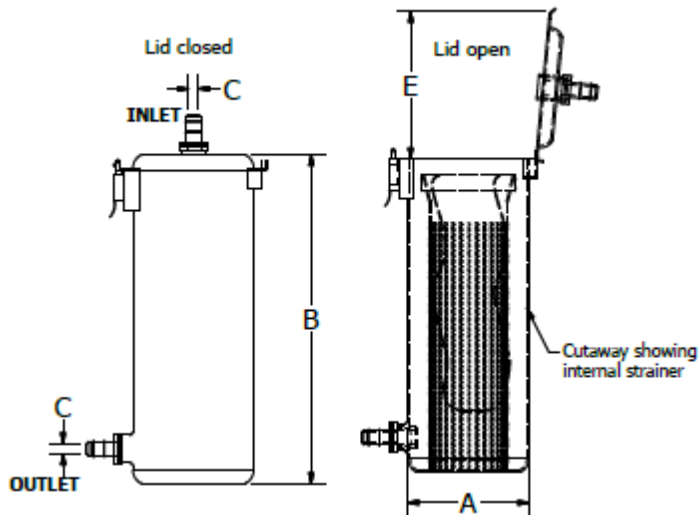

DIMENSIONS

A - Diameter	4.5"
B - Height	12.5"
C - Inlet / Outlet Diameter	3/4"
E - Open Lid Space	5.5"

ST2 coffee machine waste filter

The ST2 is a filter for industrial coffee machines, specifically designed to treat the waste flow of backwash before going through the drain. Coffee grounds are strained through an ultra fine fabric mesh filter.

The ST2 is easy to fit and comes with pipe fittings and wall brackets for easy installation. The ultra fine fabric mesh filter can be used to strain the grounds.

For confined spaces the ST2 Mini is available .

Specification

☐ Coffee Guardian - Part # ST-2

Coffee Guardian ST-2, coffee waste filter. 16 gauge fully welded 304 stainless steel tank and stainless steel cylinder, ultra fine mesh filter and robust stainless steel clamps, directional inlet and outlet flow connections, with easy fit 3/4" pipe couplings, concealed mounting bracket connections and 2.2+ pounds solids retention capacity. The ST-2 is supplied with mounting hardware and supplied with ultra fine mesh filters. The ST-2 is suitable for wall or shelf mounting arrangements. 3 year warranty is standard.

☐ Replacement Filter Socks - Part # CGF5

5 Pack of replacement Coffee Guardian Filter Socks

KEY INSTALLATION NOTES

- The ST2 Coffee Guardian should be positioned in the cabinet beneath the coffee machine using the brackets provided.
- Ensure clearance is provided for opening the hinged lid as indicated in the diagram above.
- Ensure that the ST2 is positioned close to the front of the cabinet for ease of operation and inspection.
- Connect the flexible waste hose on the coffee machine to the ST2 inlet and connect the waste outlet pipe to the floor waste point.
- Ensure that a gravity fall in line with local plumbing codes, is provided between the STs and the floor waste point
- The Grease Guardian ST2 system is supplied with 3/4" connections.



Grease Guardian
127, Cliffside Drive
Yonkers
NY 10710

800-677-7861
info@greaseguardian.com
www.greaseguardianusa.com