

# REACH-IN REFRIGERATOR

## Model: 1RSE-HD

### 1-Section Slim Line Reach-In Refrigerator with Half Doors

**1RSE-HD** - Stainless steel front, aluminum end panels and interior  
**1RSE-SA-HD** - Stainless steel exterior, aluminum interior  
**1RSE-SS-HD** - Stainless steel exterior and interior  
**Designed to maintain NSF-7 temperatures in 100°F ambient.**



#### Options and Accessories

(upcharge and lead times may apply)

|                                       |                                           |
|---------------------------------------|-------------------------------------------|
| Stainless steel case back             | Full door                                 |
| Additional epoxy-coated steel shelves | Shallow depth                             |
| Chrome or stainless steel shelves     | Hinged glass doors                        |
| Heavy-duty pilaster strips            | Increased refrigeration systems           |
| Expansion valve system                | Special electrical req. (consult factory) |
| Wine display                          | <b>Correctional Facility Options</b>      |
| Adjustable legs                       | • One way security screws                 |
| Digital thermometer                   | • Locking hasp (lock not included)        |
| Remote models                         | • Stainless steel mesh cover              |
| Custom laminates                      | • Coverless hinges                        |

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

#### Standard Model Features

##### REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

##### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

##### MODEL FEATURES

LED interior lighting

External dial thermometer

Energy saving switch for door heaters

Will accommodate 12 x 20 pans

Rehinging of door (in the field)

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                          |                  |
|------------------------------------------|------------------|
| Net Capacity (cu. ft.)                   | 15 (425 cu l)    |
| Width, Overall (in.)                     | 17 3/4 (451 mm)  |
| Depth, Overall (in.) (incl. handles)     | 35 3/8 (899 mm)  |
| Depth [less door] (in.)                  | 32 (813 mm)      |
| Depth [door open 90°] (in.)              | 47 3/8 (1203 mm) |
| Clear Door Width (in.)                   | 13 1/8 (333 mm)  |
| Clear Half Door Height (in.)             | 28 1/2 (724 mm)  |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2096 mm) |
| No. of Doors                             | 2                |
| No. of Shelves                           | 5                |
| Shelf Area (sq. ft.)                     | 9.3 (.9 sq m)    |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4  |
| Capacity (BTU/Hr)*          | 1940 |

### ELECTRICAL DATA

|                                     |                     |
|-------------------------------------|---------------------|
| Voltage (int'l)                     | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground)           | 3                   |
| Total Amps (int'l)                  | 5.5 (3.4)           |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No)            |

### SHIPPING DATA

|                              |                  |
|------------------------------|------------------|
| Height - Crated (in.)        | 85 1/2 (2172 mm) |
| Width - Crated (in.)         | 32 (813 mm)      |
| Depth - Crated (in.)         | 42 (1067 mm)     |
| Volume - Crated (cu. ft.)    | 65 (1841 cu l)   |
| Weight Std - Crated (lbs.)   | 310 (141 kg)     |
| Weight SS - Crated (lbs.)    | 350 (159 kg)     |
| Weight Std - Uncrated (lbs.) | 190 (86 kg)      |
| Weight SS - Uncrated (lbs.)  | 250 (113 kg)     |



\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA 5-15P Plug  
(varies by country)

## Model Plan Views

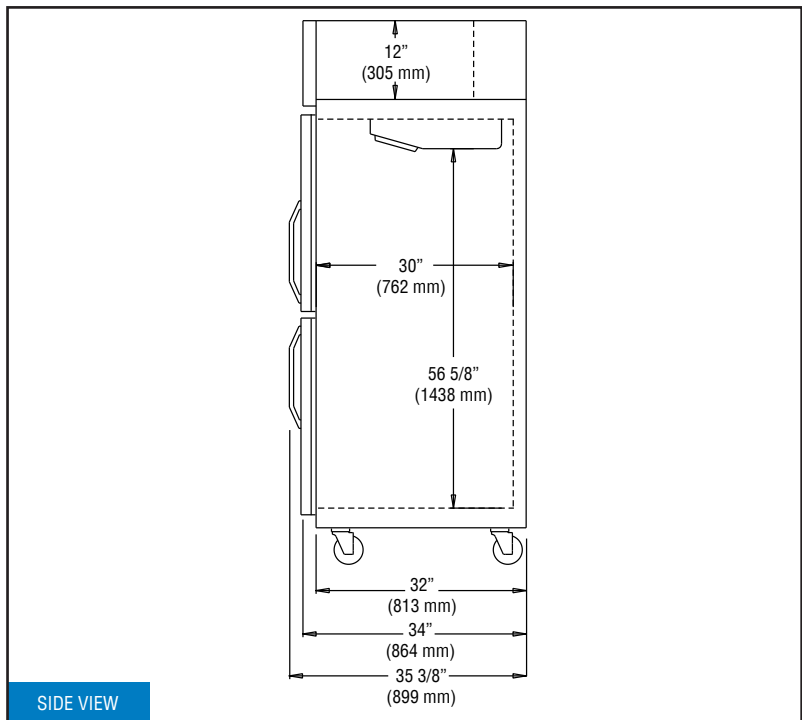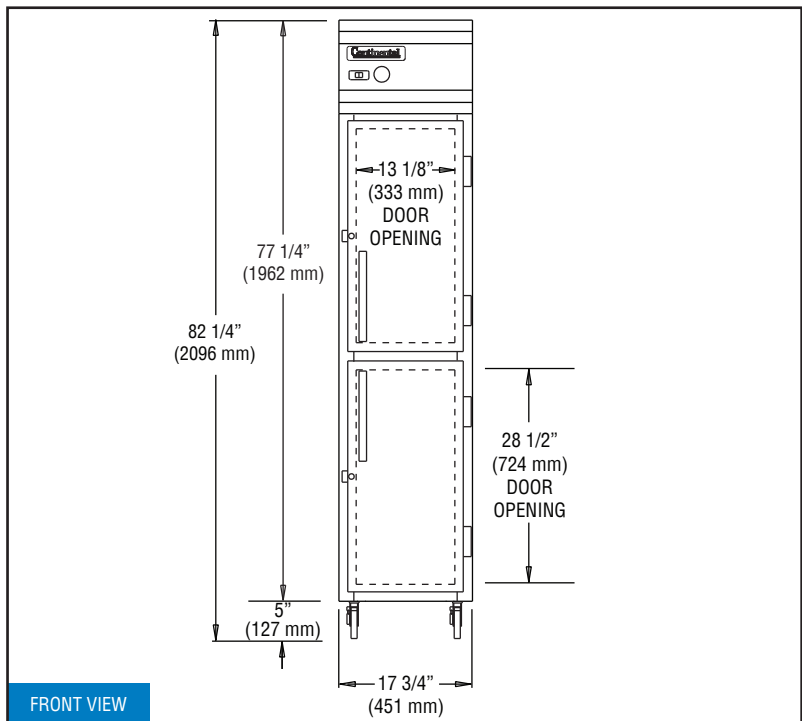

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Intertek



MADE IN THE U.S.A.

© Copyright 2015. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.