

NOR-LAKE, INCORPORATED 727 Second Street Hudson, Wisconsin 54016 800-955-5253 715-386-2323 866-961-5253 Parts 800-388-5253 Service 715-386-6149 FAX www.norlake.com

FLAT LID DISPLAY FREEZER




SPECIFICATIONS FOR: FTB31-6, FTB43-9, FTB52-12, FTB71-17

- <u>Finish:</u>
 Painted white powder coated steel interior and exterior
- Doors: Sliding glass doors flat glass with one piece frame, lid locks with keys
- Hardware:
 (4) four casters, baskets and dividers, rubber bumper guards on grill side
- <u>Electrical:</u> 115/60/1 with cord and plug
- <u>Refrigeration</u>: Self-contained refrigeration system. Operating temperature: -18°F to +10°F. R290 Refrigerant.
- Approvals: ETL Safety (US and Canada), ETL Sanitation

STANDARD FEATURES

- Baskets and dividers
- Bottom drain with plug
- External analog thermometer display
- Interior LED lighting with separate on/off switch
- Lid lock and keys
- Operating temperature: -18°F to +10°F
- Rubber bumper guards on grill side
- Sliding glass doors
- White interior and exterior
- Warranties: 1 year parts and labor
- Approvals: ETL Safety (US and Canada), ETL Sanitation

** ETL is Intertek Labs Safety Certification Mark which indicates that Intertek has tested the equipment to applicable CSA Standards. ** ETL-Sanitation is Intertek Labs Sanitation Certification Mark which indicates that Intertek has tested the equipment to applicable NSF Standards. **-LAT LID DISPLAY FREEZ**

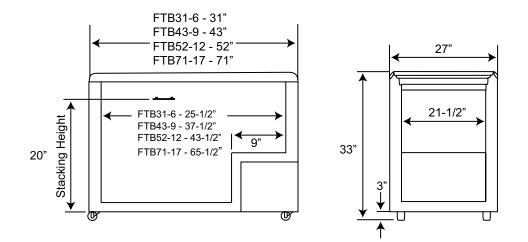

SPECIFICATIONS


Models	FTB31-6	FTB43-9	FTB52-12	FTB71-17
Crated Weight (lbs) (kg)	159 (72)	192 (86)	224 (101)	280 (126)
Crated Height (in) (cm)	39-1/2 (100)	39-1/2 (100)	39-1/2 (100)	39-1/2 (100)
Crated Width (in) (cm)	34 (86)	46 (117)	55 (140)	74 (188)
Crated Depth (in) (cm)	30 (76)	30 (76)	30 (76)	30 (76)
Interior Height (in) (cm)	25 (64)	25 (64)	25 (64)	25 (64)
Interior Width (in) (cm)	25-1/2 (65)	37-1/2 (95)	43-1/2 (111)	65-1/2 (166)
Interior Depth (in) (cm)	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)
Overall Height (in) (cm)	33 (84)	33 (84)	33 (84)	33 (84)
Overall Width (in) (cm)	31 (79)	43 (109)	52 (132)	71 (180)
Overall Depth (in) (cm)	27 (69)	27 (69)	27 (69)	27 (69)
Gross Cubage (CuFt) (L)	7.4 (209.5)	11.1 (314.3)	13.8 (390.7)	20.0 (566)
Number of Baskets*	2	3	4	5
Number of Casters	4	4	4	4
Condensing Unit Size	1/3 HP	1/3 HP	1/3 HP	2/3 HP
Refrigerant	R290	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P	5-15P
Total Amp Draw	1.1	1.1	1.3	3.9

Specifications subject to change without notice.

* includes 1 divider per basket









©2020 Nor-Lake, Inc. All rights reserved.