



Project \_\_\_\_\_  
 Item # \_\_\_\_\_  
 Quantity \_\_\_\_\_


## Glo-Ray® Narrow Infrared Strip Heaters

Models: GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNM-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

Hatco Glo-Ray® Narrow Strip Heaters are great for use in tight spaces and keep the focus on food items being displayed. Ideal for minimal sight obstruction of food product in heated buffet areas. Even the most delicate dishes hold that "just-prepared" look.

### Standard features

- Sleek, slim design with just 2 1/8" (51 mm) height and 4" (102 mm) depth keeps the focus on the food in buffet lines
- Available in widths from 18" to 72" (457-1829 mm)
- Pre-focused heat maintains serving temperatures longer without continuing to cook the food
- Optional remote control enclosure in *Designer* colors†
- Sturdy continuous heavy duty Steel housings available in *Designer* colors: Warm Red, Black (standard), Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper or Stainless Steel
- Accessorize units with non-adjustable tubular stands in *Designer* colors†
- Models come with non-adjustable 1.5" (38 mm) angle brackets available in *Designer* colors†
- An on-off switch and indicator light can be installed in front or back of unit, GRNM models use remote controls only (no built-ins)
- Additional reflector styles and lower wattage elements also available, please consult factory for more information

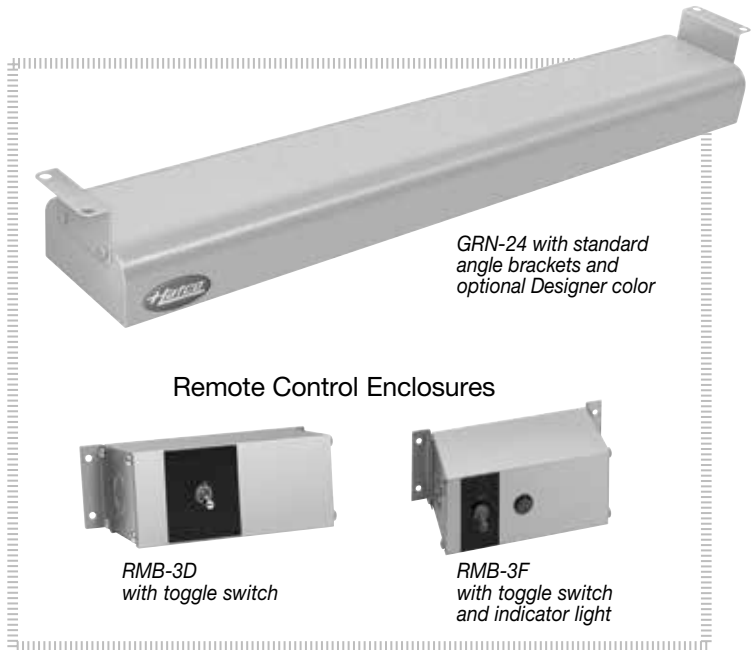

GRN-24 with standard angle brackets and optional *Designer* color

### Remote Control Enclosures

RMB-3D with toggle switch

RMB-3F with toggle switch and indicator light

### Options (available at time of purchase only)

- Housing in *Designer* Color† (Black standard)
- Warm Red     Gray Granite     White Granite     Navy Blue  
 Hunter Green     Antique Copper     Stainless Steel
- Leads – Standard 6" (152 mm) – must specify lead length  
 1'-5" (305-1525 mm)     6'-10" (1829-3048 mm)  
 11'-15" (3352-4572 mm)     16'-20" (4877-6096 mm)
- Remote Box – in *Designer* Color† (Clear Anodized standard)  
 Warm Red     Black     Gray Granite     White Granite  
 Navy Blue     Hunter Green     Antique Copper
- Stainless Steel Hanger tabs in lieu of angle brackets
- Attached 6' (1829 mm) Cord and Plug Set (120V GRN and GRNH only) on models up to 72" (1829 mm) wide with Standard Chain Mount Kit (two S hooks with two 6" (152 mm) lengths of chain) and hanger tabs (max.1800 watt)
- Standard Chain Mount Kit (Two S Hooks with Two 6" (152 mm) lengths of chain)
- Adjustable Tubular Stands 10"-14" (254-356 mm)
- Non-Adjustable Tubular Stands – choose clearance  
 10" (254 mm)     12" (305 mm)     14" (356 mm)     16" (406 mm)
- Designer* Color for Tubular Stands† (Clear Anodized standard)  
 Warm Red     Black     Gray Granite     White Granite  
 Navy Blue     Hunter Green     Antique Copper
- Indicator light

†Non-standard colors are non-returnable



HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com




# Glo-Ray® Narrow Infrared Strip Heaters

Models: GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNM-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## GRN, GRNH, GRNM

GRNM units use remote controls only (no built-ins)

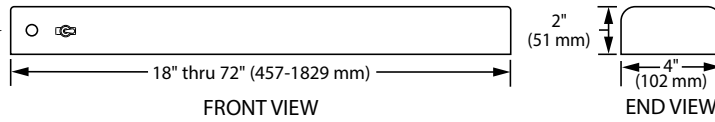

## SPECIFICATIONS - Glo-Ray® Narrow Infrared Strip Heaters

Phase: Single

The shaded areas contain electrical information for International models

Standard Watt				High Watt				Max Watt				All Models		
Model	Volts	Watts	Amps	Model	Volts	Watts	Amps	Model <sup>○</sup>	Volts	Watts	Amps	Dimensions W x D x H	Plug	Ship Weight*
GRN-18	120	250	2.1	GRNH-18	120	350	2.9	GRNM-18	120	450	3.8	18" x 4" x 2" (457 x 102 x 51 mm)	NEMA 5-15P	6 lbs. (3 kg.)
	208		1.2		208		1.7		208		2.2			
	240		1.0		240		1.5		240		1.9			
	220	1.1	220		1.6	220	-		220	-				
	240	1.0	240		1.5	240	-		240	-				
	220-230 (CE) <sup>†</sup>	250-273	1.1-1.2		220-230 (CE) <sup>†</sup>	350-383	1.6-1.7		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	230-250	1.0-1.0	230-240 (CE) <sup>†</sup>	321-350	1.4-1.5	230-240	-	230-240	-					
GRN-24	120	350	2.9	GRNH-24	120	500	4.2	GRNM-24	120	650	5.4	24" x 4" x 2" (610 x 102 x 51 mm)	NEMA 5-15P	7 lbs. (3 kg.)
	208		1.7		208		2.4		208		3.1			
	240		1.5		240		2.1		240		2.7			
	220	1.6	220		2.3	220	-		220	-				
	240	1.5	240		2.1	240	-		240	-				
	220-230 (CE) <sup>†</sup>	350-383	1.6-1.7		220-230 (CE) <sup>†</sup>	500-547	2.3-2.4		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	321-350	1.4-1.5	230-240 (CE) <sup>†</sup>	459-500	2.0-2.1	230-240	-	230-240	-					
GRN-30	120	450	3.8	GRNH-30	120	660	5.5	GRNM-30	120	825	6.9	30" x 4" x 2" (762 x 102 x 51 mm)	NEMA 5-15P	8 lbs. (4 kg.)
	208		2.2		208		3.2		208		4.0			
	240		1.9		240		2.8		240		3.4			
	220	2.1	220		3.0	220	-		220	-				
	240	1.9	240		2.8	240	-		240	-				
	220-230 (CE) <sup>†</sup>	450-492	2.1-2.2		220-230 (CE) <sup>†</sup>	660-721	3.0-3.1		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	413-450	1.8-1.9	230-240 (CE) <sup>†</sup>	606-660	2.6-2.8	230-240	-	230-240	-					
GRN-36	120	575	4.8	GRNH-36	120	800	6.7	GRNM-36	120	1000	8.3	36" x 4" x 2" (914 x 102 x 51 mm)	NEMA 5-15P	9 lbs. (4 kg.)
	208		2.8		208		3.8		208		4.8			
	240		2.4		240		3.3		240		4.2			
	220	2.6	220		3.6	220	-		220	-				
	240	2.4	240		3.3	240	-		240	-				
	220-230 (CE) <sup>†</sup>	575-629	2.6-2.7		220-230 (CE) <sup>†</sup>	800-875	3.6-3.8		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	528-575	2.3-2.4	230-240 (CE) <sup>†</sup>	735-800	3.2-3.3	230-240	-	230-240	-					
GRN-42	120	675	5.6	GRNH-42	120	950	7.9	GRNM-42	120	1175	9.8	42" x 4" x 2" (1067 x 102 x 51 mm)	NEMA 5-15P	10 lbs. (5 kg.)
	208		3.2		208		4.7		208		5.6			
	240		2.8		240		4.0		240		4.9			
	220	3.1	220		4.3	220	-		220	-				
	240	2.8	240		4.0	240	-		240	-				
	220-230 (CE) <sup>†</sup>	675-738	3.1-3.2		220-230 (CE) <sup>†</sup>	950-1038	4.3-4.5		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	620-675	2.7-2.8	230-240 (CE) <sup>†</sup>	873-950	3.8-4.0	230-240	-	230-240	-					
GRN-48	120	800	6.7	GRNH-48	120	1100	9.2	GRNM-48	120	1300	10.8	48" x 4" x 2" (1219 x 102 x 51 mm)	NEMA 5-15P	11 lbs. (5 kg.)
	208		3.8		208		5.3		208		6.3			
	240		3.3		240		4.6		240		5.4			
	220	3.6	220		5.0	220	-		220	-				
	240	3.3	240		4.6	240	-		240	-				
	220-230 (CE) <sup>†</sup>	800-874	3.6-3.8		220-230 (CE) <sup>†</sup>	1100-1202	5.0-5.2		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	735-800	3.2-3.3	230-240 (CE) <sup>†</sup>	1010-1100	4.4-4.6	230-240	-	230-240	-					
GRN-54	120	925	7.7	GRNH-54	120	1250	10.4	GRNM-54	120 <sup>‡</sup>	1500	12.5	54" x 4" x 2" (1372 x 102 x 51 mm)	NEMA 5-15P	13 lbs. (6 kg.)
	208		4.4		208		6.0		208		7.2			
	240		3.9		240		5.2		240		6.3			
	220	4.2	220		5.7	220	-		220	-				
	240	3.9	240		5.2	240	-		240	-				
	220-230 (CE) <sup>†</sup>	925-1011	4.2-4.4		220-230 (CE) <sup>†</sup>	1250-1366	5.7-5.9		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	850-925	3.7-3.9	230-240 (CE) <sup>†</sup>	1148-1250	5.0-5.2	230-240	-	230-240	-					
GRN-60	120	1050	8.8	GRNH-60	120	1400	11.7	GRNM-60	120 <sup>‡</sup>	1700	14.2	60" x 4" x 2" (1524 x 102 x 51 mm)	NEMA 5-15P	14 lbs. (6 kg.)
	208		5.0		208		6.7		208		8.2			
	240		4.4		240		5.8		240		7.1			
	220	4.8	220		6.4	220	-		220	-				
	240	4.4	240		5.8	240	-		240	-				
	220-230 (CE) <sup>†</sup>	1050-1148	4.8-5.0		220-230 (CE) <sup>†</sup>	1400-1530	6.4-6.7		220-230	-	220-230			
230-240 (CE) <sup>†</sup>	964-1050	4.2-4.4	230-240 (CE) <sup>†</sup>	1286-1400	5.6-5.8	230-240	-	230-240	-					

<sup>○</sup> All GRNM units must use Remote Controls (no Built-Ins), cord & plug not available.  
 \* Shipping weight includes packaging and does not include RMB.

<sup>†</sup> CE approved units for 220-230V utilize a 220V heating system; 230-240V CE units utilize a 240V heating system.  
<sup>‡</sup> Units not available with Infinite Switch in 120V. RMB2-1R or RMB2-2R series remote control box required.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



# Glo-Ray® Narrow Infrared Strip Heaters

Models: GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNM-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS - Glo-Ray® Narrow Infrared Strip Heaters

Phase: Single

The shaded areas contain electrical information for International models

Standard Watt				High Watt				Max Watt				All Models				
Model	Volts	Watts	Amps	Model	Volts	Watts	Amps	Model <sup>○</sup>	Volts	Watts	Amps	Dimensions W x D x H	Plug	Ship Weight <sup>†</sup>		
GRN-66	120	1160	9.7	GRNH-66	120 ‡	1560	13.0	GRNM-66	120 *x	1875	15.6	66" x 4" x 2" (1676 x 102 x 51 mm)	NEMA 5-15P <sup>‡</sup>	16 lbs. (7 kg.)		
	208		5.6		208		7.5		208		9.0					
	240		4.8		240		6.5		240		7.8					
	220	1160	5.3		220	1560	7.1		220	-	220				-	-
	240		4.8		240		6.5		240	-	240				-	-
	220-230 (CE) <sup>†</sup>		1160-1268		5.3-5.5		220-230 (CE) <sup>†</sup>		1560-1705	7.1-7.4	220-230				-	-
	230-240 (CE) <sup>†</sup>	1066-1160	4.6-4.8		230-240 (CE) <sup>†</sup>	1433-1560	6.2-6.5		230-240	-	230-240				-	-
GRN-72	120	1275	10.6	GRNH-72	120 ‡	1725	14.4	GRNM-72	120 *x	2075	17.3	72" x 4" x 2" (1829 x 102 x 51 mm)	NEMA 5-15P <sup>‡</sup>	17 lbs. (8 kg.)		
	208		6.1		208		8.3		208		10.0					
	240		5.3		240		7.2		240		8.6					
	220	1275	5.8		220	1725	7.8		220	-	220				-	-
	240		5.3		240		7.2		240	-	240				-	-
	220-230 (CE) <sup>†</sup>		1275-1394		5.8-6.1		220-230 (CE) <sup>†</sup>		1725-1886	7.8-8.2	220-230				-	-
	230-240 (CE) <sup>†</sup>	1171-1275	5.1-5.3		230-240 (CE) <sup>†</sup>	1584-1725	6.9-7.2		230-240	-	230-240				-	-

○ All GRNM units must use Remote Controls (no Built-Ins), and not available with cord and plug.

\* Shipping weight includes packaging and does not include RMB.

‡ Units not available with Infinite Switch in 120V. RMB2-1R or RMB2-2R series remote control box required.

† CE approved units for 220-230V utilize a 220V heating system; 230-240V CE units utilize a 240V heating system.

\* Units not available with Built-In toggle switches in 120V. RMB2-1R or RMB2-2R series Remote Control Box required.

‡ GRNH-66 and GRNH-72 require NEMA 5-20P cord for Canada.

### TOGGLE SWITCH

Toggle Switch: Max. 15 amps

Location: Chef's left side standard, other options available  
 GRNM units use remote control enclosures only (no built-ins)

### INFINITE SWITCH


Max. 12.2 amps

### LEADS

6" (152 mm) leads (on server's right)

### PLUG CONFIGURATIONS

Please refer to electrical specifications shown in charts.



### REMOTE CONTROL ENCLOSURES

RMB series uses one Control Box per Strip Heater - If RMB2 series is used, multiple warmers can be controlled from one box (U.S., Canada only). CE models require any remote switches be contained in a Remote Control Enclosure. For more details, see "Choose Remote Box" under "Resources" on Hatco website, or consult Price List.

Model	Volts	Width	Infinite/Toggle Switches
			U.S., Canada, Export U.S. Dollar
RMB-3A	120	5.5"(140 mm)	1 infinite
RMB-3B	208	5.5"(140 mm)	1 infinite
RMB-3C	240	5.5"(140 mm)	1 infinite
RMB-3D	120, 208, 240	5.5"(140 mm)	1 toggle
RMB-3F	120	5.5"(140 mm)	1 toggle, 1 indicator light
RMB-3G	208	5.5"(140 mm)	1 toggle, 1 indicator light
RMB-3H	240	5.5"(140 mm)	1 toggle, 1 indicator light
RMB-7F	120	9"(229 mm)	1 infinite, 1 indicator light
RMB-7G	208	9"(229 mm)	1 infinite, 1 indicator light
RMB-7H	240	9"(229 mm)	1 infinite, 1 indicator light
RMB2-1R	120, 208, 240	11" (280 mm)	1 toggle, 1 electronic infinite
RMB2-2R	120, 208, 240	14" (356 mm)	1 toggle, 1 electronic infinite

### PRODUCT SPECS - Infrared Strip Heater

The Narrow Infrared Strip Heater shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be a Glo-Ray Model ..., rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of Stainless Steel or Designer painted housing and include as standard equipment non-adjustable 1.5" (38 mm) angle brackets and an On-Off switch and

### RECOMMENDED MOUNTING HEIGHTS

(For diagrams, refer to the Product Installation Manual on the Hatco website)

#### GRN, GRNH

Standard Watt: 8"-11" (203-279 mm) High Watt: 11"-14" (279-356 mm)

#### GRNM

Max Watt: 14"-18" (356-457 mm)

### MINIMUM CLEARANCES

#### GRN, GRNH

##### Combustibles

Unit to surface below: 11" (279 mm)  
 Unit to back wall: 2" (51 mm)  
 Below overshelf: 1" (25 mm) clearance

##### Non-Combustibles

##### Corded Units with Built-In Switches:

Must be installed in a pass through area, not allowed with back wall installation

Unit to surface below: 7" (178 mm)  
 Unit to back wall: 2" (51 mm)  
 Below overshelf: 3" (76 mm) clearance

##### Hardwired Units with Built-In Switches:

Must be installed in a pass through area, not allowed with back wall installation

With Infinite Control or Indicator Light  
 Unit to surface below: 10" (254 mm)  
 Below overshelf: 1" (25 mm) clearance  
 With On/Off Toggle Switch  
 Unit to surface below: 8" (203 mm)  
 Below overshelf: 1" (25 mm) clearance

##### Hardwired Units with Remote Switches:

Unit to surface below: 8" (203 mm)  
 Unit to wall: 0" (0 mm)  
 Below overshelf: 0" (0 mm) clearance

#### GRNM

##### Combustibles

Must be installed in non-combustible surroundings only

##### Non-Combustibles

Unit to surface below: 12" (305 mm)  
 Unit to wall: 3" (76 mm)  
 Below overshelf: 1" (24 mm) clearance  
 Set back 10" (254 mm) maximum from front of an overshelf

indicator light may be optionally installed to either the front or rear of the unit.

The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include choice of Stainless Steel or Designer color, extended electrical leads, remote control box, and non-adjustable tubular stands.

Comes with 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipmentsales@hatcocorp.com | intl@hatcocorp.com