



Cardinal Scale
model HSDC-500
digital hanging scale
with pushbutton tare

HSDC Series USA-Made Digital Hanging Scales



LEGAL FOR TRADE

Class III certificate
All HSDC models are NTEP
except model HSDC-500



**Stainless Steel Eyehook
and Hook Included for
Versatile Weighing Use**


- 1-inch-High Bold LCD Readouts for Easy Visibility
- Aluminum Alloy Enclosure for Lightweight Strength
- Up to 500-lb and 100-kg Capacities Available
- 9 Different Models to Select From
- Battery Powered for Convenient Portable Weighing

Cardinal Scale's HSDC Series Digital Hanging Scales

Fishing • Curbside Recycling Collection • Butchery/Meat Processing • Industrial Applications • Supermarkets



Powered by 6 C batteries for completely portable weighing (not included)
Auto Shutoff and Sleep Mode extend battery life

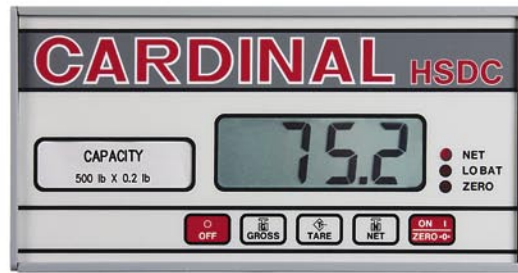

1-inch/25-mm-high bold LCD display
Lightning-fast and accurate digital readouts

Model HSDC-20KGP includes galvanized scoop and chains

Galvanized scoop measures 13.5 in/34 cm W x 15 in/38 cm D x 6.125 in/15.5 cm H



HSDC-20	HSDC-40	HSDC-100	HSDC-200	HSDC-500	HSDC-20KG/ HSDC-20KGP	HSDC-40KG	HSDC-100KG
20 lb x .01 lb	40 lb x .02 lb	99.95 lb x .05 lb	200 lb x .1 lb	500 lb x .2 lb	20 kg x .01 kg HSDC-20KGP features galvanized scoop	40 kg x .02 kg	99.95 kg x .05 kg
Scale Dimensions		Width: 8.5 in / 21.6 cm Depth: 5.1 in / 13.0 cm Height: 4.3 in / 10.9 cm					
Overall Dimensions (with hooks)		Width: 8.5 in / 21.6 cm Depth: 5.1 in / 13.0 cm Height: 14.0 in / 35.6 cm (including eyehook and hook)					
LCD Display Dimensions		Width: 3.3 in / 8.4 cm Height: 1.1 in / 2.8 cm					
LCD Digit Size		Width: 0.5 in / 1.3 cm Height: 1.0 in / 2.5 cm					
Product Weight		5.8 lb / 2.6 kg (10 lb / 4.5 kg with model HSDC-20KGP's galvanized scoop)					
Shipping Weight		7.2 lb / 3.3 kg (including packaging)					
Power		6 C size alkaline batteries (not included)					
Operating Temperature		+14° to 104°F (-10° to +40°C)					
Zero		Established during setup and maintained automatically to ± 1/4 graduation					
Auto Zero Range		5 and 0 through 9 graduations					
Calibration Method		Digital, keypad entered; calibration stored in nonvolatile memory					
Tare		Push button, 100% of full scale capacity					
Annunciators		Center of zero, motion, net, low battery, over capacity					
Buttons		ON/ZERO, NET, TARE, GROSS, OFF					
Load Cell		USA-made Cardinal Scale model CMBC constant moment beam cell					
Sample Rate		1 - 12 samples per second, selectable					
Auto Shut-off		Power saving mode selectable from 1 to 9 minutes					
NTEP Approval		03-030 Accuracy Class III (applies to all HSDC models except HSDC-500)					

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice. All registered trademarks are the property of their respective owners.


Cardinal
 Cardinal Scale Manufacturing Co.
 203 E. Daugberty, Webb City, MO 64870 USA
 Ph: 417-673-4631 or 800-441-4237 • Fax: 417-673-5001
www.CardinalScale.com

Mobile: m.cardinalscales.com

SOLD BY: