



MECHANICALLY ASSISTED REFRIGERATED COLD PAN TABLES WITH ENCLOSED BASE



MACP-3-BS Shown



Item #:	_____	Qty #:	_____
Model #:	_____		
Project #:	_____		

NOTE: Units are not designed to cool foods originally warm. Food should already be chilled to maintain the proper temperatures

FEATURES:

- High nominal cooling capacity for consistent product temperature control
- Aluminum encased copper tube evaporator panels improve heat transfer by increasing contact area. This increases operating efficiency and reduces power consumption
- Expansion valve for efficient operation at various temperature conditions
- Refrigerant filter drier to insure cleanliness of sealed refrigeration circuit
- Sight glass to insure a properly charged refrigeration system
- Liquid receiver for improved refrigerant charge control
- Low running current suitable for any 115 volt circuit
- Precision electronic thermostat for exact temperature control
- Stainless steel shelf with removable 3/8" thick poly cutting board - Ships K.D.

MATERIAL:

- TOP:** 18 gauge #304 stainless steel welded open frame
- LINER:** Constructed of 18 gauge, 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. All corners are covered with a 1/4" radius.
- CABINET BASE:** 20 gauge #304 stainless steel
- PLUMBING:** 1" I.P.S. drain

REFRIGERATION SYSTEM: The compressor is housed in a 16 gauge galvanized under structure, fabricated from formed angles and bolted to the galvanized jacket. The fully self contained condensing unit is provided with a hermetically sealed compressor with a digital, programmable thermostat. The system is fully charged with environmentally friendly R404-A refrigerant.

LEGS: 18 gauge #302 stainless steel with fully adjustable non-marking tip plastic bullet foot

CUTTING BOARD: White Thermoplastic

CUTTING BOARD BRACKETS: 16 gauge #302 stainless steel

ELECTRICAL:

Unit will be wired for 15 amps, 120V single phase operation with an on/off thermostat switch

MACP-2 & MACP-3: 115 V, 8 AMPS, 60 Hz, 1/5 HP

MACP-4 & MACP-5: 115 V, 8 AMPS, 60 Hz, 1/3 HP

Includes 6 ft. long, 3 wire cord with a NEMA 5-15P plug

Model	Length (L)	Width	Opening Size (A x B)	Drain Distance (C)	Refrigerant	Wt (lbs.)	Cu. Ft.
MACP-2-BS	31-13/16"	22-3/4"	27-5/16" x 20"	26-3/4"	R404-A	230	39
MACP-3-BS	47-1/8"	22-3/4"	42-5/8" x 20"	41-11/16"	R404-A	256	56
MACP-4-BS	62-1/2"	22-3/4"	57-1/2" x 20"	57"	R404-A	380	73
MACP-5-BS	77-3/4"	22-3/4"	73-1/4" x 20"	72-5/16"	R404-A	465	90



NEMA 5-15P

OPTIONAL ACCESSORIES

SU-45A 12" x 1" Adapter Bar

SU-45B 20" x 3" Adapter Bar



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:


Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL $\pm .125"$

ALL DIMENSIONS ARE TYPICAL

SIDE VIEW

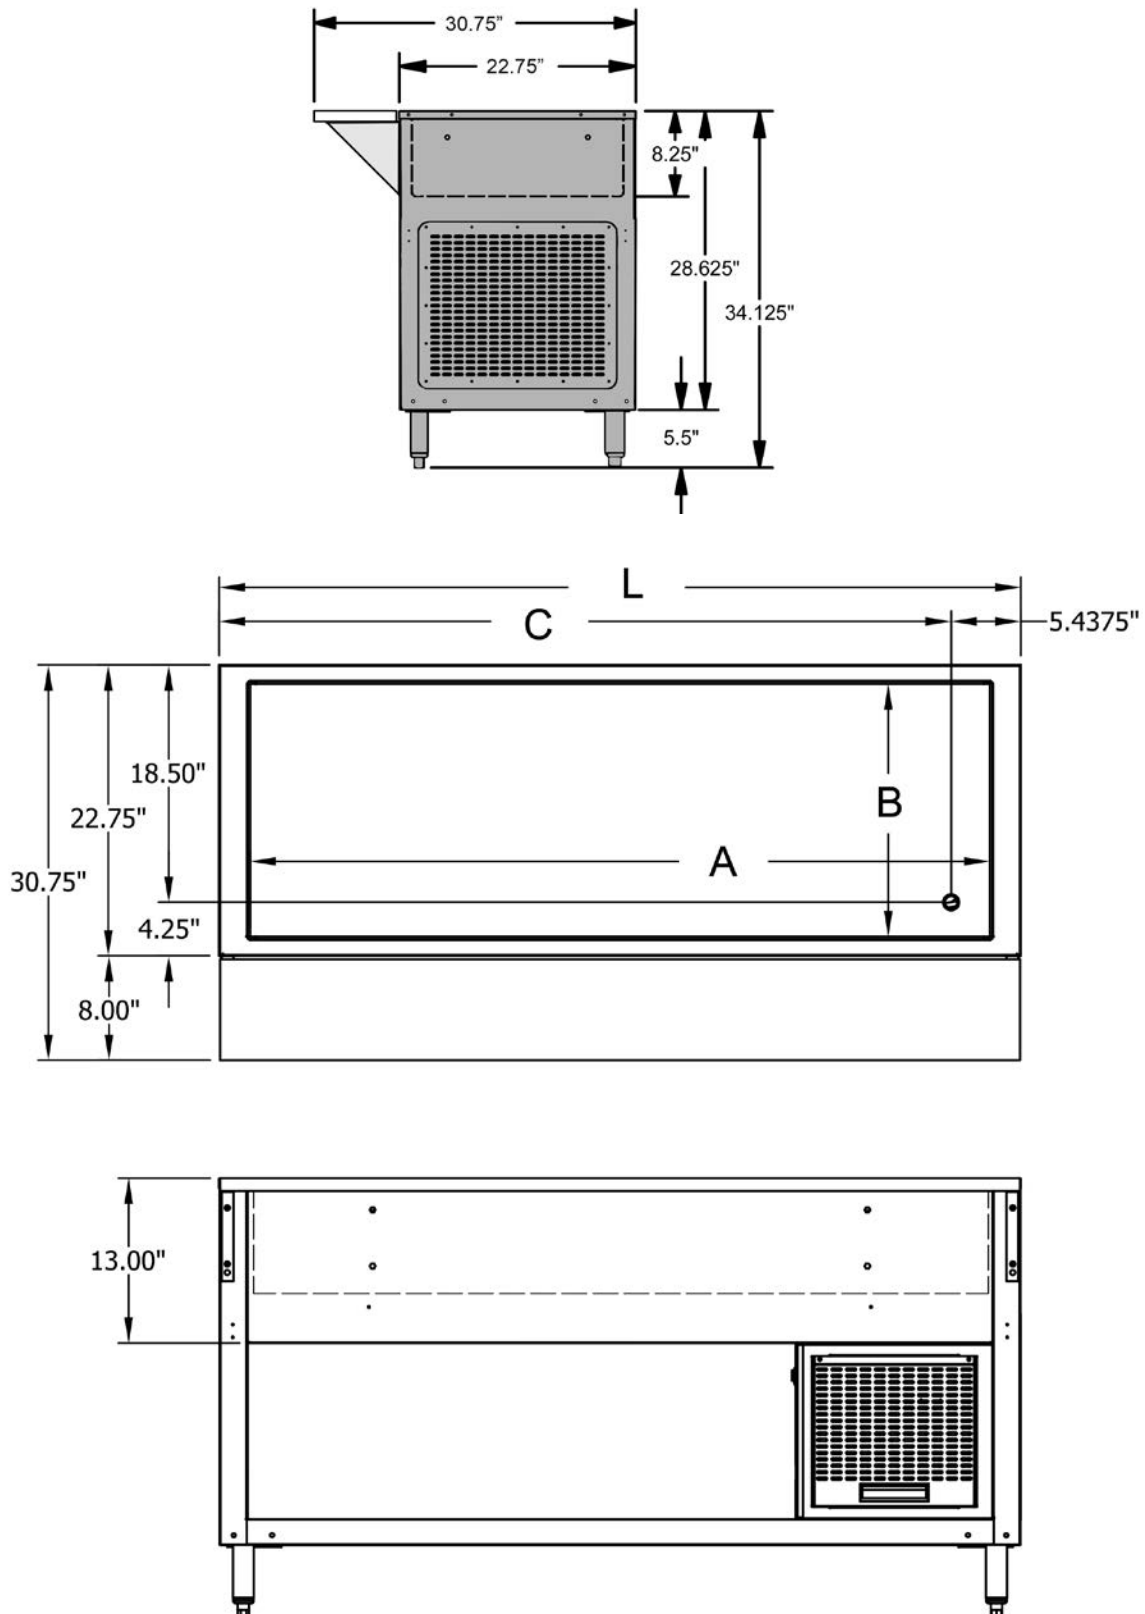

REF-V

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, DECEMBER 2016