



# N8000-R

Drop-In Curved Ice Cooled Cold Pan


Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

N8000-R:

Drop-In Curved Ice Cooled Cold Pan

## Models

- N8044-R Ice cooled cold well, fits 2 standard 12" x 20" pans
- N8059-R Ice cooled cold well, fits 3 standard 12" x 20" pans
- N8076-R Ice cooled cold well, fits 4 standard 12" x 20" pans
- N8094-R Ice cooled cold well, fits 5 standard 12" x 20" pans

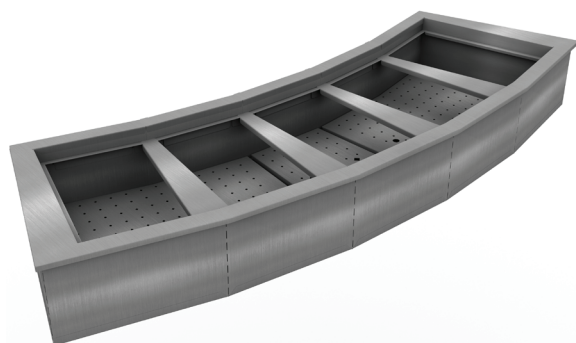

N8094-R


## Standard Features

- NSF certified
- Stainless steel holding clips secure pans
- Push-in perimeter gasket
- 1" drain standard
- Environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation
- Removable perforated, false bottom
- One year parts and 90 day labor standard warranty


## Options & Accessories

- Custom pan template
- Adaptor bars
- Flexishield® food shields, single or dual service


## N8044-R

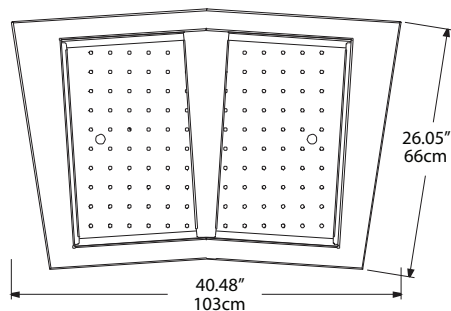


N8044-R Plan View

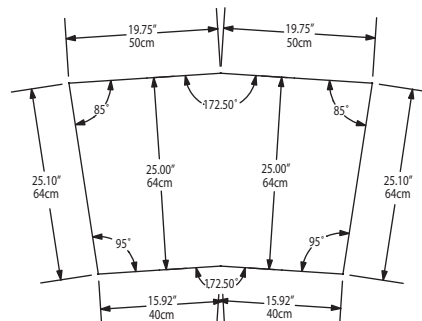

N8044-R Cutout Dimensions

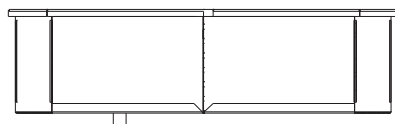


N8044-R Elevation View




N8044-R Side View


## N8059-R

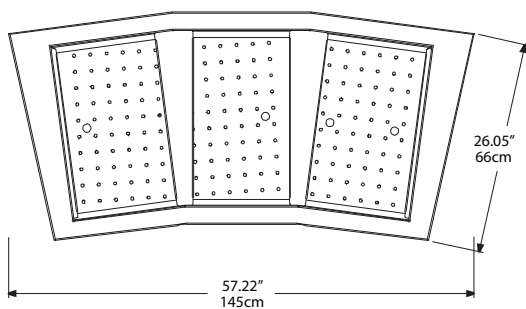


N8059-R Plan View

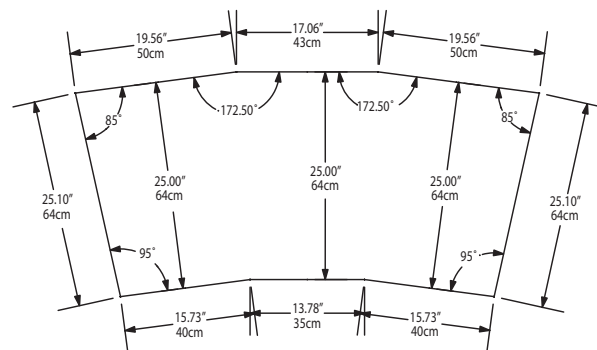

N8059-R Cutout Dimensions




N8059-R Elevation View




N8059-R Side View


## N8076-R

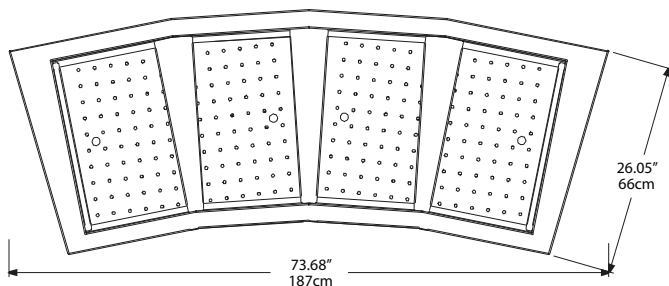


N8076-R Plan View

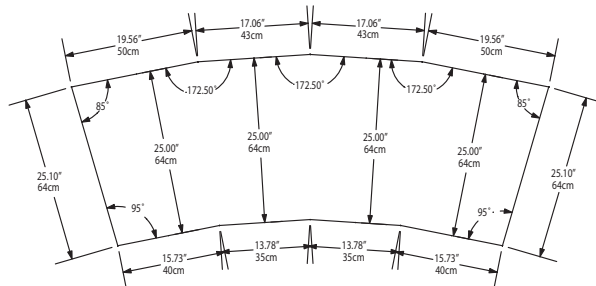

N8076-R Cutout Dimensions




N8076-R Elevation View




N8076-R Side View


## N8094-R

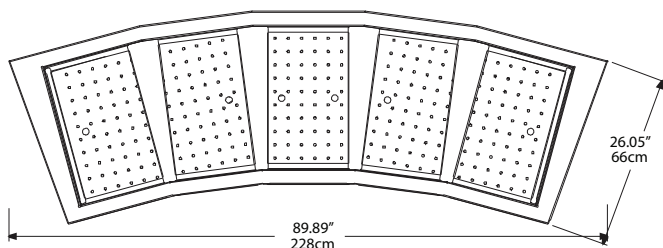


N8094-R Plan View

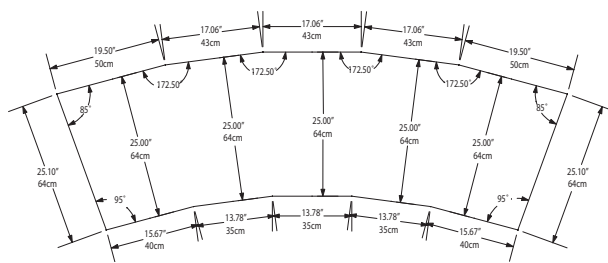

N8094-R Cutout Dimensions



N8094-R Elevation View



N8094-R Side View



# N8000-R

## Drop-In Curved Ice Cooled Cold Pan

### Specifications

**Top** is one piece 18-gauge stainless steel. Interior liner is 22-gauge stainless steel and is creased to 1.00" (3cm) diameter drain. Unit has a sectional, removable perforated stainless steel false bottom. Stainless steel holding clips and adapter bars are provided to allow placement of 12" x 20" (30cm x 51cm) pans. Unit is supplied with 1" (3cm) plastic drain to be installed by customer. Exterior housing is 24-gauge galvanized steel. Unit is insulated with high density closed cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

### Specifications

| Model   | # Of 12" x 20"<br>Pans Held | Shipping Weight |
|---------|-----------------------------|-----------------|
| N8044-R | 2                           | 100lbs/45kg     |
| N8059-R | 3                           | 118lbs/53kg     |
| N8076-R | 4                           | 145lbs/65kg     |
| N8094-R | 5                           | 164lbs/74kg     |

Delfield reserves the right to make changes to the design or specifications without prior notice.

