# **DUAL TEMP REFRIGERATOR/FREEZER**

Model: 2RF

# 2-Section Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F)

2RF - Stainless steel front, aluminum end panels and interior

2RF-SA - Stainless steel exterior, aluminum interior

2RF-SS - Stainless steel exterior and interior

Designed to maintain NSF-7 temperatures in 100°F ambient.



#### **Options and Accessories**

(upcharge and lead times may apply)

(aponargo ana to	aa iiiioo iiiaj appijj	
Stainless steel case back	Shallow depth (consult factory)	
Add'l epoxy-coated steel shelves	Hinged glass doors	
Chrome or stainless steel shelves	Half doors	
Heavy-duty pilaster strips	Increased refrigeration systems	
Rehinging of doors (consult factory)	Special electrical req. (consult factory)	
Expansion valve system	Correctional Facility Options	
Wine display (refrigerator section)	One way security screws	
Adjustable legs	Locking hasp (lock not included)	
Custom laminates	Stainless steel mesh cover	
Pan slide assemblies	Coverless hinges	
Pass-Thru (consult factory)		

 ${\it Consult factory for other model configurations, options and accessories.}$ 



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

#### **Standard Model Features**

#### REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant (refrigerator)

Environmentally-safe R-404A refrigerant (freezer)

Separate, self contained, performance-rated refrigeration systems

Automatic, electric condensate evaporator

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

#### **MODEL FEATURES**

LED interior lighting

Electronic controllers w/digital display & hi-low alarm Automatic electric defrost (freezer section)

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	20/20 (566/566 cu I)
Width, Overall (in.)	52 (1321 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	55 1/2 (1410 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (in.) (incl. 5" casters)	82 1/4 (2089 mm)
No. of Doors	2
No. of Shelves	6
Shelf Area (sq. ft.) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per section)	24
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4, 1/3

Condensing Unit Size (H.P.)	1/4, 1/3
Capacity (BTU/Hr)*	1940 / 1590

### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3/3
Total Amps (int'l)	5.5 (3.5) / 7.6 (3.8)
Defrost Amps (int'l)	5.2 (2.6)
(2) 10 ft. Cord/Plug [attach.] (int'l)	Yes (No)


#### SHIPPING DATA


OIIII I ING DATA	
Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu I)
Weight Std - Crated (lbs.)	580 (263 kg)
Weight SS - Crated (lbs.)	700 (318 kg)
Weight Std - Uncrated (lbs.)	410 (186 kg)
Weight SS - Uncrated (lbs.)	530 (240 kg)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient (refrigerator) \* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

## **Model Plan Views**

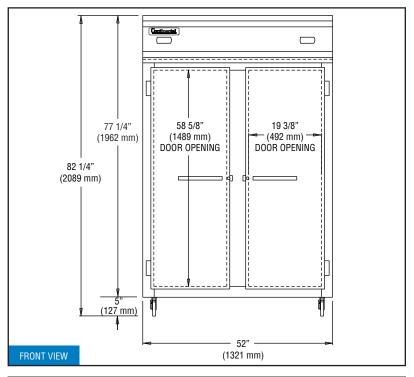

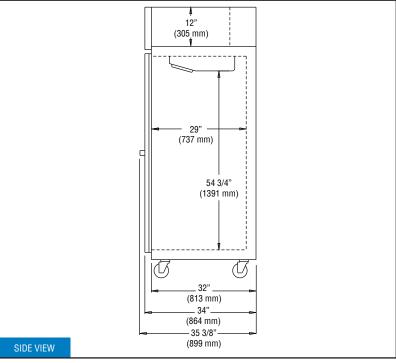

**IMPORTANT NOTE**: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.



Equipped with two NEMA-5-15P Plugs (varies by country)