



# A Series Solid Door Reach-In Refrigerators & Freezers

MODEL #178A12FHC

### CABINET CONSTRUCTION

White painted aluminum interior and type 430 stainless steel exterior.  
Foamed-in-place CFC- and HCFC-free polyurethane insulation.  
Removable one-piece grill for cleaning and servicing.  
Door has stay-open feature beyond 90° for easy loading; self-close under 90° to save energy.  
"No stoop" lower shelf raises product to a higher level for easy access.

### REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant.  
Bottom-mounted condensing unit positioned for easy maintenance.

### SHELVING

3 gray epoxy-coated steel shelves included.  
Each accommodates up to 90 lb.

### MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function

PROJECT: \_\_\_\_\_  
MODEL: \_\_\_\_\_ SERIAL#: \_\_\_\_\_  
ITEM #: \_\_\_\_\_ QUANTITY: \_\_\_\_\_  
APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

### A SERIES REACH-IN FREEZER

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

### SPECIAL FEATURES

- Compact, narrower width and depth that fits in small footprints
- Self-closing door with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Painted aluminum interior
- Temperature range of (-8) - (-1)°F
- 3 shelves included
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V, 1/4 hp
- ETL Safety & Sanitation Listed



### WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



★ Conforms to UL & NSF-7 Standards



### TECHNICAL DATA

#### Dimensions

Exterior Dimensions	24 <sup>13</sup> / <sub>16</sub> "W x 23 <sup>7</sup> / <sub>16</sub> "D x 64 <sup>1</sup> / <sub>16</sub> "H
Interior Dimensions	20 <sup>7</sup> / <sub>8</sub> "W x 18 <sup>7</sup> / <sub>8</sub> "D x 48 <sup>3</sup> / <sub>8</sub> "H
Net Volume	11 cu. ft.
Net Weight	159 lb.
Gross Weight	183 lb.
Packaging Dimensions	26 <sup>1</sup> / <sub>4</sub> "W x 25 <sup>5</sup> / <sub>8</sub> "D x 68 <sup>7</sup> / <sub>8</sub> "H

#### Construction

Exterior Material	430 Stainless Steel
Interior Material	Painted Aluminum
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 17 <sup>3</sup> / <sub>4</sub> " x 20 <sup>1</sup> / <sub>4</sub> "
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	90 lb.



#### Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4+

#### Electrical

Voltage	115
Amps	3.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	98"

### PLAN VIEW

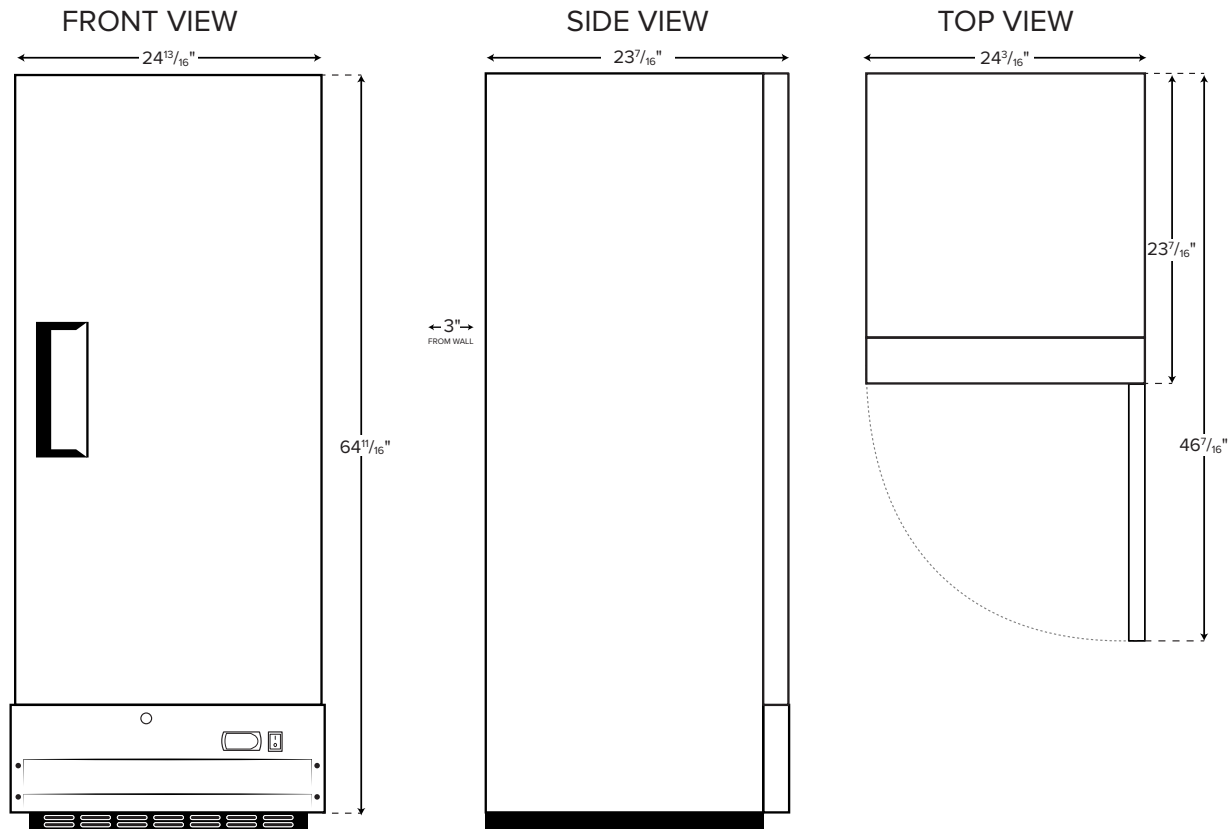

NEMA 5-15P