

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :		
Model #:		
Item #:	Qty:	
Available W/H:		
Approval :		

Swing Door Merchandiser

Glass Door Merchandisers Refrigerators

Model: TGM-14RV

___ FEATURES & BENEFITS =__

■ Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

■ Hot gas condensate system Only Turbo Air models

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ LED advertising panel

LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

LED lighting interior

Brighter and longer lasting LED lights provide attractive, enhanced illumination compared to fluorescents. It saves energy by producing less heat, while maximizing the visibility in the display area.

■ Double pane glass doors with Low-E glass

Energy saving double pane glass door is equipped with Low-emissivity glass, which reduce outer heat gain and decrease energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduce door maintenance and bushing wear, which in turn facilitates smoother door openings.

■ Efficient refrigeration system

Turbo Air's glass door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- Bottom mount compressor unit
- Ergonomically designed door with easy grip handle
- Magnetic door gasket

High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.



Refrigerator holds 33°F ~ 38°F for the best in beverage preservation











_							inter	CK
	Model	Swing Door	CU./FT.	#of Shelves	НР	AMPS	Crated Weight (lbs.)	L x D*x H (inches)
	TGM-14RV	1	12.17	Top: 3 Bottom: 1	1/4	6.3	187	235/8 x 233/8 x 735/8

(unit: inch)

Swing Door Merchandiser

Model: TGM-14RV

ELECTRICA	ELECTRICAL DATA				
Voltage		115/60/1			
Plug Type		(i) NEMA 5-15P			
Full Load Am	peres	6.3			
Compressor	HP	1/4			
Cord Length	(ft.)	9.8			
Refrigerant		R-134A			
DIMENSIONAL DATA					
# of Doors		1			
Net Capacity	(cu. ft.)	12.17			
Ext. Length C	verall (in.)	235/8 (600mm)			
Ext. Depth O	verall (in.)*	233/8 (594mm)			
Ext. Height O	verall (in.)	73 _{5/8} (1870mm)			
Int. Length O	verall (in.)	19 (483mm)			
Int. Depth Ov	erall (in.)	197/8 (504mm)			
Int. Height Ov	verall (in.)	57 _{1/2} (1460mm)			
Net Weight (I	os.)	168			
Gross Weight (lbs.)		187			
# of Shelves	Тор	3			
0. 0	Bottom	1			
Shelf Size (L)	(D) (in.)	203/8 x 167/8			
Bottle Capaci	ty	150 (Full) 120 (Load Line)			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


■ WARRANTY: 2 Year Parts and Labor Warranty
Additional 3 Year Warranty on Compressor


- White color cabinet & black color frame on door
- Gravity feed shelf available (optional)

■ OPTIONAL ACCESSORIES:

- ☐ Additional PE coated wire shelf: 30278F0300
- ☐ Gravity feed shelf: 30278F0400

PLAN VIEW



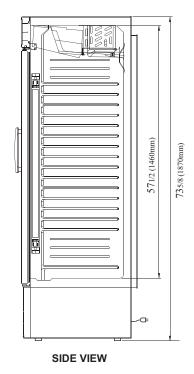

Ver.201701
















■ Warranty: 800-381-7770 ■ AC: 888-900-1002











^{*} Depth does not include 1-3/8" for door handle.