



Project:
Item Number:
Quantity:

LOW PROFILE HEAT STRIPS



- Bright annealed stainless steel heat reflector generates maximum performance for wider heat dispersion and offers larger temperature zone above 140°F (60° C) for safe food holding
- Sheathed element for dependability and longer life
- Unique element design offers greater heat dispersion for more effective warming
- Stainless steel mounting brackets with adjustable set screws provide proper spacing for safe installation or easy replacement
- Remote switch installation allows installation flexibility for your operation. Available with infinite or toggle switch.
- Available in natural aluminum or a variety of powder coats including: chrome, brass, black, white hammer, silver vein, and copper vein.

DESCRIPTION

The Low Profile Heat Strip is intended to be used as a heat source to help maintain food at safe and ideal temperature until served.

FEATURES

- Low profile design
- Structurally engineered aluminum heater housing offers maximum strength with minimal weight

Note: All heat strips are custom ordered and therefore cannot be canceled or returned

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship, one year parts and labor warranty, and additional one year warranty on heating element (parts only). For full warranty details, please refer to www.Vollrath.com.

Due to continued product improvement, please consult www.vollrath.com for current product specifications.

FC-4SH-(AA)(BBB)-(CC)-(DD)

| Step 1 Select Size | |
|-----------------------|-------------|
| Size | "AA" Suffix |
| 18" | 18 |
| 24" | 24 |
| 30" | 30 |
| 36" | 36 |
| 42" | 42 |
| 48" | 48 |
| 54" | 54 |
| 60" | 60 |
| 66" | 66 |
| 72" | 72 |
| 78" | 78 |
| 84" | 84 |

| Step 2 Select Voltage | |
|--------------------------|--------------|
| Voltage | "BBB" Suffix |
| 120V | 120 |
| 208V | 208 |

| Step 3 Select Color | |
|--------------------------|-------------|
| Color | "CC" Suffix |
| Natural Aluminum | NA |
| Chrome Powder Coat | CH |
| Brass Powder Coat | BR |
| Black Powder Coat | BL |
| White Hammer Powder Coat | WH |
| Silver Vein Powder Coat | SI |
| Copper Vein Powder Coat | CO |

| Step 4 Select Control | |
|--------------------------|-------------|
| Color | "DD" Suffix |
| Remote Infinite | IN |
| Remote Toggle Switch | SW |

Example: FC-4SH-48120-BL-SW
 48 = 48" unit
 120 = 120V
 BL = Black Powder Coat
 SW = Remote Toggle Switch

*Controls cannot be retrofitted.

AGENCY LISTINGS



| Approvals | Date |
|-----------|------|
| | |




www.vollrathfoodservice.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Main Tel: 800.624.2051 or 920.457.4851
 Main Fax: 800.752.5620 or 920.459.6573
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560

Technical Services
techservicereps@vollrathco.com
 Induction Products: 800.825.6036
 Countertop Warming Products: 800.354.1970
 All Other Products: 800.628.0832

LOW PROFILE HEAT STRIPS

DIMENSIONS - Inches (cm)

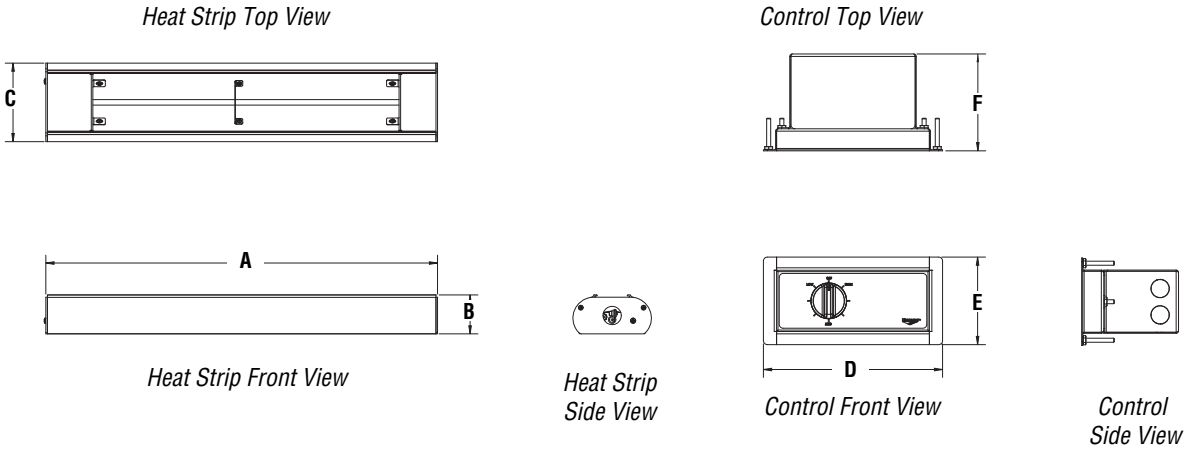

SPECIFICATIONS

| Size | Wattage | Amp Draw | | Dimensions | | | | | | Shipping Weights lb (kg) |
|------|---------|----------|------|--------------------|--------------------|-------------------|---------------------------|----------------------------|---------------------------|-----------------------------|
| | | 120V | 208V | (A) Length (cm) | (B) Height (cm) | (C) Width (cm) | (D) Control Width (cm) | (E) Control Height (cm) | (F) Control Depth (cm) | |
| 18" | 414 | 3.5 | 2.0 | 18.71 (47.5) | 1.86 (4.7) | 3.75 (9.5) | 8.5 (21.6) | 4.15 (10.5) | 4.60 (11.7) | 7.7(3.5) |
| 24" | 553 | 4.6 | 2.7 | 24.71 (62.8) | | | | | | 8.3 (3.8) |
| 30" | 690 | 5.8 | 3.3 | 30.71 (78.0) | | | | | | 9.0 (4.1) |
| 36" | 826 | 6.9 | 4.0 | 36.71 (93.2) | | | | | | 9.7 (4.4) |
| 42" | 966 | 8.1 | 4.6 | 42.71 (108.5) | | | | | | 10.5 (4.7) |
| 48" | 1103 | 9.2 | 5.3 | 48.71 (123.7) | | | | | | 11.3 (5.1) |
| 54" | 1237 | 10.3 | 5.9 | 54.71(139.0) | | | | | | 12.2 (5.5) |
| 60" | 1381 | 11.5 | 6.6 | 60.71 (154.2) | | | | | | 13.1 (5.9) |
| 66" | 1515 | 12.6 | 7.3 | 66.71 (169.4) | | | | | | 14.1 (6.4) |
| 72" | 1659 | 13.8 | 8.0 | 72.71 (184.7) | | | | | | 15.1 (6.9) |
| 78" | 1800 | 15.0 | 8.7 | 78.71 (199.9) | | | | | | 16.2 (7.4) |
| 84" | 1950 | 16.3 | 9.4 | 84.71 (215.2) | | | | | | 17.5 (7.9) |

CLEARANCES

Distances Between Heat Strip and Surface Below

| Clearance | Non-Combustible Surface | Combustible Surface |
|--|-------------------------|---------------------|
| Bottom of non-coated strip to surface below (minimum distance) | 11" (27.9 cm) | 18" (45.7 cm) |
| Bottom of coated strip to surface below (minimum distance) | 16" (40.6 cm) | 18" (45.7 cm) |

UL Mounting Clearance Requirements

| Clearance (Minimum Distances) | Non-Combustible Surface (Uncoated) | Non-Combustible Surface (Coated) | Combustible Surface |
|--|------------------------------------|----------------------------------|---------------------|
| Top of strip to surface above | 1" (2.5 cm) | 2" (5.1 cm) | 2" (5.1 cm) |
| Side of strip to adjacent surface | 1" (2.5 cm) | 4" (10.2 cm) | 5" (12.7 cm) |
| End of strip to adjacent surface | 1" (2.5 cm) | 1" (2.5 cm) | 4" (10.2 cm) |
| Setback from front opening on pass thru application: maximum of 8" (20.3 cm) | | | |

ACCESSORIES

All units are supplied with 3" mounting brackets. Optional brackets that can be purchased as accessories are 1" (p/n 353028-2) and 2" (353029-2).

An optional lead wire extension kit (p/n 353027-2) can be purchased to extend 6 foot stock leads an additional 6 feet.



www.vollrathfoodservice.com

The Vollrath Company, L.L.C.

1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Main Tel: 800.624.2051 or 920.457.4851
 Main Fax: 800.752.5620 or 920.459.6573
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560

Technical Services

techservicereps@vollrathco.com
 Induction Products: 800.825.6036
 Countertop Warming Products: 800.354.1970
 All Other Products: 800.628.0832