



MODEL 174CBA, 174SBA 175CBA, 175SBA

# Installation and Operation Instructions

2M-Z3755 Rev. L 10/01/2015



175CBA





### SAFETY SYMBOL





These symbols are intended to alert the user to the presence of important operating and maintenance instructions in the manual accompanying the appliance.

# RETAIN THIS MANUAL FOR FUTURE REFERENCE NOTICE

Using any part other than genuine Star factory supplied parts relieves the manufacturer of all liability.

Star reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star International Holdings Inc., Company exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

### MAINTENANCE AND REPAIRS

Contact your local authorized service agent for service or required maintenance.

Please record the model number, serial number, voltage and purchase date in the area below and have it ready when you call to ensure a faster service.

Model No.		Authorized Service Agent Listing  Reference the listing provided with the unit	
Serial No.	or		
Voltage	for an updat	ed listing go to:	
Voltage  Purchase Date	Website: E-mail	www.star-mfg.com customerservice@star-mfg.com	
Fulcilase Date	Service	Help Desk	
	Business Hours:	8:00 am to 4:30 p.m. Central Standard Time	
	Telephone:	(314) 678-6303	
	Fax:	(314) 781-2714	
	E-mail	customerservice@star-mfg.com	
	Website:	www.star-mfg.com	
	Mailing Address:	Star International Holdings Inc., Company 10 Sunnen Drive	

St. Louis, MO 63143

U.S.A

### **SPECIFICATIONS**

174SBA

Type: Spike Wheel

Capacity: 24 Hot Dogs, 12 Buns

Electrical: 120 volt, 60 hertz, single phase, 1150 watts, 9.58 amps

230 volt, 60 hertz, single phase, 1060 watts, 4.61 amps

Cord Length - 4 ft.

Plug: 120V NEMA Spec - NEMA 5-15P

230V CEE-7/VII rated 16A 250V

Dimensions: 13 1/2"W x 14 1/2"D x 24"H

(34.29 cm W x 36.83 cm D x 60.96 cm H)

**174CBA** 

Type: Cradle Wheel

Capacity: 18 Hot Dogs, 12 Buns

Electrical: 120 volt, 60 hertz, single phase, 1150 watts, 9.58 amps

230 volt, 60 hertz, single phase, 1060 watts, 4.61 amps

Cord Length - 4 ft.

Plug: 120V NEMA Spec - NEMA 5-15P

230V CEE-7/VII rated 16A 250V

Dimensions: 13 1/2"W x 14 1/2"D x 24"H

(34.29 cm W x 36.83 cm D x 60.96 cm H)

175SBA

Type: Spike Wheel

Capacity: 48 Hot Dogs, 32 Buns

Electrical: 120 volt, 60 hertz, single phase, 1350 watts, 11.25 amps

230V volt, 60 hertz, single phase, 1240 watts, 5.39 amps

Cord Length - 4 ft.

Plug: 120V NEMA Spec - NEMA 5-15P

230V CEE-7/VII rated 16A 250V

Dimensions: 19 1/2"W x 14 1/2"D x 24"H

(49.53 cm W x 36.83 cm D x 60.96 cm H)

175CBA

Type: Cradle Wheel

Capacity: 36 Hot Dogs, 32 Buns

Electrical: 120 volt, 60 hertz, single phase, 1350 watts, 11.25 amps

230V volt, 60 hertz, single phase, 1240 watts, 5.39 amps

Cord Length - 4 ft.

Plug: 120VNEMA Spec - NEMA 5-15P

230V CEE-7/VII rated 16A 250V

Dimensions: 19 1/2"W x 14 1/2"D x 24"H

(49.53 cm W x 36.83 cm D x 60.96 cm H)



This equipment is designed and sold for commercial use only by personnel trained and experienced in its operation and is not sold for consumer use in and around the home nor for use directly by the general public in food service locations.

Before using your new equipment, read and understand all the instructions & labels associated with the unit prior to putting it into operation. Make sure all people associated with its use understand the units operation & safety before they use the unit.


All shipping containers should be checked for freight damage both visible and concealed. This unit has been tested and carefully packaged to insure delivery of your unit in perfect condition. If equipment is received in damaged condition, either apparent or concealed, a claim must be made with the delivering carrier.

Concealed damage or loss - if damage or loss is not apparent until after equipment is unpacked, a request for inspection of concealed damage must be made with carrier within 15 days. Be certain to retain all contents plus external and internal packaging materials for inspection. The carrier will make an inspection and will supply necessary claim forms.

This equipment is designed and sold for commercial use only by personnel trained and experienced in its operation and is not sold for consumer use in and around the home nor for use directly by the general public in food service locations.

### **INSTALLATION**


- 1. Clean unit inside and outside before placing in service. (See Cleaning)
- Install the low E Tempered, oxide coated glass (reflective side facing inward) as shown below.
  The 1/4" thick glass goes in the side location, resting in the track formed into the shelf. The 1/8" thick glass goes on the front of the unit.

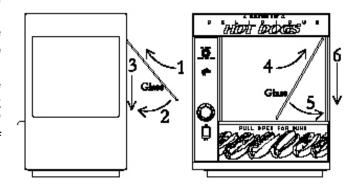

3. Install the wire shaft support as shown in steps 7 and 8. Mounting holes have been punched in the ceiling of the unit.



- 4. Install the hot dog wheel as shown in steps 9 and 10. While holding the wire shaft support against the side glass, install the hot dog wheel in the broiler by placing the slotted end of the shaft into the motor coupling at the left of the broiler (step 9). Turn the shaft until the slot engages with the coupling pin. Raise the grooved end of the shaft up and into the wire shaft support on the right side of the broiler (step 10).
- 5. Place the unit in a prominent location on a level counter, where the revolving hot dogs will attract attention.
- 6. Precaution should be taken so customers do not come in contact with the hot unit.
- Plug the power cord into a suitable 120 volt outlet that can provide the required wattage. Having other appliances on a curcuit, may prevent your unit from recieving the necessary voltage.



### **GENERAL OPERATING PROCEDURES**

- 1. Pre-heat unit for 15 minutes while set at 10.
- 2. Place the desired quantity of hot dogs on the holders. NOTE: A lower temp control setting may be used for slower broiling. The time required to broil the hot dogs will vary, depending upon the size and the temperature of the hot dogs when placed in the Broil-O-Dog.
- 3. Place the desired quantity of buns in the bun drawer For best results leave buns in the bag. A 50 watt warming elements is installed to keep buns warm.
- 4. Turn control to 6 or 7 to keep the hot dogs in a ready-to-serve condition. Hot dogs can be held for several hours on this unit without loss of flavor or shriveling.
- Load or unload the hot dog wheel by pressing in and holding the serve switch to stop the hot dog wheel.

## NOTE: When you turn the switch to the "OFF" position, you turn off the heating element.

### COOKING

The heat control provides an infinite range of settings for a wide variety of hot dogs and installation conditions. The size, content and shape of the product and the installation of any sanitary food shields or sneeze guards will determine the proper heat setting. The National Sanitation Foundation requires that perishable foods be kept at 140°F or above during serving periods. The product should be kept refrigerated until ready for use. Cooking time will vary depending on the starting temperature and the qualities of the product.COOKING


The heat control provides an infinite range of settings for a wide variety of hot dogs and installation conditions. The size, content and shape of the product and the installation of any sanitary food shields or sneeze guards will determine the proper heat setting. The National Sanitation Foundation requires that perishable foods be kept at 140°F or above during serving periods. The product should be kept refrigerated until ready for use. Cooking time will vary depending on the starting temperature and the qualities of the product.

### **CLEANING**

- 1. Place ON/OFF switch in "OFF" position.
- 2. Remove the hot dog wheel and drip tray.
- 3. Remove the wheel hanger at right side of broiler.
- 4. The glass is removable for cleaning but care must be taken when doing so.
- 5. Clean all of the above parts and inside and outside of the unit with mild soap and water; rinse and install parts.
- 6. These models require the removal of the bun drawer to remove the bun pan. To remove the bun drawer, grab the drawer by both sides and pull it out all the way. Lift the front to unhook the drawer slide from rear drawer roller. Pull the drawer the remainder of the way out. Use caution not to drop the drawer when reaching the end of the drawer slide travel. To reinsert the drawer, first hook the drawer slide over the front roller then the back roller (See Figure1-Figure 3).



# TO AVOID COMBUSTION, REPLACEMENT GLASS MUST BE LOWETEMPERED, TIN OXIDE COATED. CALL STAR SERVICE HELP DESK.

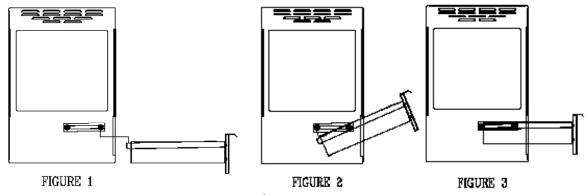

### **MAINTENANCE PROCEDURES**

### **LIGHT BULB**

Use a 15 watt, 120 volt (or 240V if applicable) appliance size oven-type lamp.

### **GLASS REPLACEMENT**

Refer to the installation procedures located on page 4. To prevent surounding areas from getting to hot, use only a low E Tempered, oxide coated glass (reflective side facing inward) when replaceing glass. This glass can be purchased by contacting Star (contact information located on the inside front cover).

### Email: customerservice@star-mfg.com

### THOROUGHLY INSPECT YOUR UNIT ON ARRIVAL

This unit has been tested for proper operation before leaving our plant to insure delivery of your unit in perfect condition. However, there are instances in which the unit may be damaged in transit. In the event you discover any type of damage to your product upon receipt, you must immediately contact the transportation company who delivered the item to you and initiate your claim with same. If this procedure is not followed, it may affect the warranty status of the unit.

### LIMITED EQUIPMENT WARRANTY

All workmanship and material in Star products have a one (1) year limited warranty on parts & labor in the United States and Canada. Such warranty is limited to the original purchaser only and shall be effective from the date the equipment is placed in service. Star's obligation under this warranty is limited to the repair of defects without charge, by the factory authorized service agency or one of its sub-agencies. Models that are considered portable (see below) should be taken to the closest Star service agency, transportation prepaid.

- > Star will not assume any responsibility for loss of revenue.
- > On all shipments outside the United States and Canada, see International Warranty.
- \* The warranty period for the Ultra-Max, Hot Plates, Griddles, Charbroilers is (3) years parts & labor.
- \* The warranty period for the Star-Max, Charbroilers, Griddles, Hot Plates, Fryers & Finishing Oven is (2) years parts & labor.
- \* The warranty period for the JetStar six (6) ounce & Super JetStar eight (8) ounce series popcorn machines is two (2) years.
- \* The warranty period for the Chrome-Max Griddles is five (5) years on the griddle surface. See detailed warranty provided with unit.
- \* The warranty period for Dura-Tec coatings is one year under normal use and reasonable care. This warranty does not apply if damage occurs to Dura-Tec coatings from improper cleaning, maintenance, use of metallic utensils, or abrasive cleaners, abrasive pads, product identifiers and point-of-sale attachments, or any other non-food object tha comes in continuous contact with the roller coating. This warranty does not apply to the 'non-stick" properties of such materials.
- > This warranty does not apply to "Special Products" but to regular catalog items only. Star's warranty on "Special Products" is six (6) months on parts and ninety (90) days on labor.
- This warranty does not apply to any item that is disassembled or tampered with for any purpose other than repair by a Star Authorized Service Center or the Service Center's sub-agency.
- This warranty does not apply if damage occurs from improper installation, misuse, wrong voltage, wrong gas or operated contrary to the Installation and Operating instructions.
- > This warranty is not valid on Conveyor Ovens unless a "start-up/check-out" has been performed by a Factory Authorized Technician.

### **PARTS WARRANTY**

Parts that are sold to repair out of warranty equipment are warranted for ninety (90) days. The part only is warranted, the labor to replace the part is NOT warranted.

### SERVICES NOT COVERED BY WARRANTY

- Travel time and mileage rendered beyond the 50 mile radius limit
- Mileage and travel time on portable equipment (see below)
- Labor to replace such items that can be replaced easily during a daily cleaning routine, ie; removable kettles on fryers, knobs, grease drawers on griddles, etc.
- Installation of equipment
- Damages due to improper installation
- Damages from abuse or misuse 6.
- Operated contrary to the Operating and Installation Instructions
- Cleaning of equipment 8.
- Seasoning of griddle plates

- 10. Voltage conversions
- Gas conversions
- 12. Pilot light adjustment
- Miscellaneous adjustments
- Thermostat calibration and by-pass adjustment
- Resetting of circuit breakers or safety controls or reset buttons 15.
- Replacement of bulbs 16.
- 17. Replacement of fuses
- Repair of damage created during transit, delivery, & 18.

installation OR created by acts of God PORTABLE EQUIPMENT

Star will not honor service bills that include travel time and mileage charges for servicing any products considered "Portable" including items listed below. These products should be taken to the Service Agency for repair:

- \* The Model 510FD, 510FF Fryer.
- \* The Model 526TOA Toaster Oven.
- \* The Model J4R, 4 oz. Popcorn Machine.
- \* The Model 518CMA & 526CMA Cheese Melter.
- \* The Model 12MC & 15MC & 18MCP Hot Food Merchandisers.
- \* The Model 12NCPW & 15NCPW Nacho Chip/Popcorn Warmer.
- \* All Hot Dog Equipment except Roller Grills & Drawer Bun Warmers.
- \* All Nacho Cheese Warmers except Model 11WLA Series Nacho Cheese Warmer.
- \* All Condiment Dispensers except the Model HPD & SPD Series Dispenser.
- \* All Specialty Food Warmers except Model 130R, 11RW Series, and 11WSA Series.
- \* All QCS/RCS Series Toasters except Model QCS3 & RCS3 Series.
- \* All Fast Steamer Models except Direct Connect Series.

- ALL:
- \* Pop-Up Toasters \* Butter Dispensers
- \* Pretzel Merchandisers
- (Model 16PD-A Only)
- \* Pastry Display Cabinets \* Nacho Chip Merchandisers
- \* Accessories of any kind
- \* Sneeze Guards
- \* Pizza Ovens
- (Model PO12 Only)
- \* Heat Lamps
- \* Pumps-Manual


The foregoing warranty is in lieu of any and all other warranties expressed or implied and constitutes the entire warranty.

### FOR ASSISTANCE

Should you need any assistance regarding the Operation or Maintenance of any Star equipment; write, phone, fax or email our Service Department. In all correspondence mention the Model number and the Serial number of your unit, and the voltage or type of gas you are using.

7


2M-4497-2 11/21/14

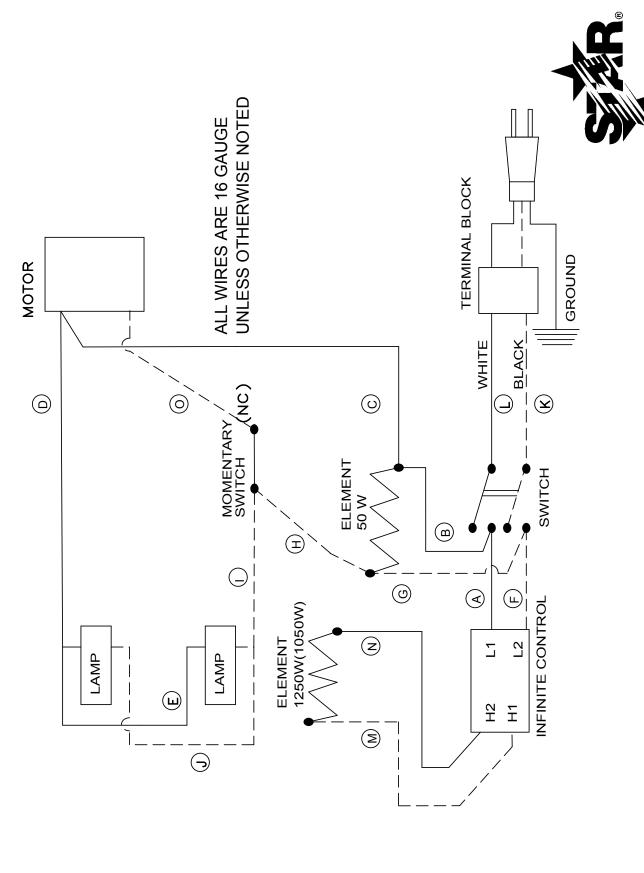

# MODEL: 174CBA, 174SBA, 175CBA, 175SBA

THIS DRAWING CONTAINS INFORMATION CONFIDENTIAL TO STAR MFG. INTL. INC. NO REPRODUCTION OR DISCLOSURE OF ITS CONTENTS IS PERMITTED.

STAR MANUFACTURING INTERNATIONAL INC.
SK1790 Rev - 7/18/2000

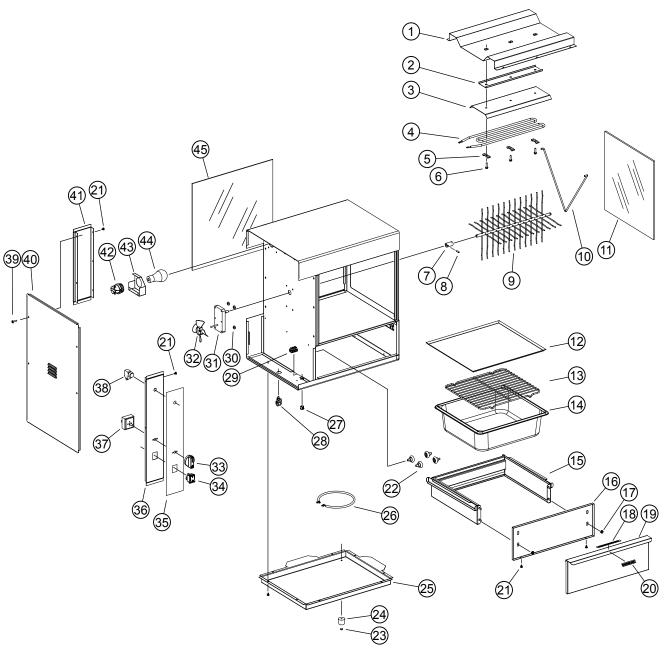

SOME ITEMS ARE INCLUDED FOR ILLUSTRATIVE PURPOSES ONLY AND IN CERTAIN INSTANCES MAY NOT BE AVAILABLE

This drawing contains information confidential to Star Manufacturing International, Inc. No reproduction or disclosure of its contents is permitted.





STAR MANUFACTURING INTERNATIONAL, INC. SK1793 REV. B 10/01/2015

		el 174Cl	BA/SBA, 174CBA/SBA Hot Dog Broi	ler
Fig No.	Part Number	Qty	Description	Application
1	A1-BD1009	1	ASSY-ELEMENT BARRIER	174CBA/SBA
	A1-BD1022	] '	A331-ELEMENT BANNEN	175CBA/SBA
2	A1-Z3693	1	ELEMENT PLATE	174CBA/SBA
	A1-Z4442		ELEMENT PLATE	175CBA/SBA
3	A1-Z3795	1	SPACER BRACKET	174CBA/SBA
	A1-Z4447			175CBA/SBA
4	2N-Y5313	1	ELEMENT-HEATING 120V	174CBA/SBA-120V
	2N-Z2754		ELEMENT 1050W 240V	174CBA/SBA-230V
	2N-Z3799		ELEMENT 1250W 120V	175CBA/SBA-120V
	2N-Z3800		ELEMENT 1250W 240V	175CBA/SBA-230V
5	A1-7490	2	CLAMP HEATER	
6	2C-08-07-0117	3	SCREW 10-24X3/4 FZA	
7	A1-175173	1	COUPLING ASSY W/PIN HINGE	
8	2A-Y1110	1	PIN-ROLL 5/32DIAX5/8 STL	
	2B-Z3656		SPIKE WHEEL (shown)	175SBA
	2B-Z3657	1	SPIKE WHEEL (shown)	174SBA
9	2B-Z7962	1	CRADLE WHEEL ASSEMBLY KIT (not shown)	175CBA
	2B-Z7963	1	CRADLE WHEEL ASSEMBLY KIT (not shown)	174CBA
10	2B-Z3647	1	SHAFT SUPPORT	
11	2Q-Z3646	1	GLASS-SIDE	
	A1-Y1290		,	175CBA/SBA
12	A1-Y5348	1	TRAY	174CBA/SBA
13	2B-Z5847	1	BUN RACK (SMALL)	
	2D-Z3643		INSET PAN 1/3	174CBA/SBA
14	2D-Z5898	1	PAN 2/3" X 4" DEEP	175CBA/SBA
	A1-BD1004		ASSY-DRAWER FRAME	175CBA/SBA
15	A1-BD1008	1	ASSY-DRAWER FRAME	174CBA/SBA
	A1-Z3665		DRAWER LINER	175CBA/SBA
16	A1-Z3688	1		174CBA/SBA
17	2C-08-07-0207	4	NUT 10-24 HEX STL NP	
18	2M-Z4941	1	LABEL (WRAPPED BUNS ONLY)	
	A1-BD1003		ASSY-DRAWER PULL	175CBA/SBA
19	A1-BD1007	1		174CBA/SBA
20	2M-Y3147	3	LABEL CAUTION HOT	
21	2C-1646	24	SCREW #8X3/8 AB THP STL	
22	2P-Z3812	4	BEARING-TRACK	
23	2P-9564	4	PLUG-RUBBER	
24	2I-Z0057	4	FOOT, RUBBER	
25	A1-Z3672	1	BASE	175CBA/SBA
	A1-Z3692			174CBA/SBA
26	2N-Y4306	1	ELEMENT 50W 120V	120V
	2N-Z3781		ELEMENT 50W 240V	230V

	Model 174CBA/SBA, 174CBA/SBA Hot Dog Broiler						
Fig No.	Part Number	Qty	Description	Application			
27	2K-Y1139	1	BUSHING HEYCO SB500-6				
28	2K-Y3240	1	BUSHING HEYCO SR 17-2				
29	2E-Z5375	1	TERMINAL BLOCK-3 POLE				
30	2I-H6579	4	GROMMET-LAVELLE #8051 BL				
0.4	2U-Z3642	1	MOTOR 2.4RPM 240V 50/60HZ	230V			
31	D5-Z17319		MOTOR 120V 60HZ (NO FAN)	120V			
32	2U-Z9811	1	FAN, MOTOR				
33	2R-Z1854	1	KNOB-CONTROL				
34	2E-Z1858	1	SWITCH-LIGHTED				
35	2M-Z3708	1	OVERLAY				
36	A1-Z3667	1	FRONT PANEL				
37	2J-Z14323		INFINITE CONTROL-120V	120V			
31	2J-Z14324	1	INFINITE CONTROL-240V	240V			
38	2E-Z3682	1	SWITCH-MOMENTARY				
39	2C-3033	8	SCREW-MACH8-32X3/4 THP SS				
40	A1-Z3669	1	ACCESS PANEL				
41	A1-Z3668	1	BACK PANEL				
42	2E-Y9184	2	SOCKET				
43	A1-Z9104	1	FRONT LAMP GUARD				
43	A1-Z9105	1	BACK LAMP GUARD				
44	2S-1279	2	LAMP 15W 130V #15A15	120V			
	2S-Y8321		LAMP 15W 220V	230V			
45	2Q-Z3644	1	GLASS-FRONT	175CBA/SBA			
45	2Q-Z3645	1	GLASS-FRONT	174CBA/SBA			
NI	2M-Z3770	1	GRAPHIC DWR FRT 175	175CBA/SBA			
NI	2M-Z3771	1	GRAPHIC DWR FRT 174	174CBA/SBA			
NI	2M-Z3772	2	GRAPHIC TOP 175	175CBA/SBA			
NI	2M-Z3773	2	GRAPHIC TOP 174	174CBA/SBA			
NI	2P-Z0584	1	TONGS-PLASTIC 9"				
NI	2E-Z3385	1	CORD SET 14/3 120V 15A	120V			
NI	B9-73029	1	LEAD IN CORD 230CE	230V			

Star - Holman - Lang - Wells - Bloomfield - Toastmaster 10 Sunnen Drive, St. Louis, MO 63143 U.S.A. (314) 678-6303 www.star-mfg.com