



CPT Series Countertop Refrigerated Prep Rail and Condiment Station

MODEL #360CPT15HC

CPT SERIES - COUNTERTOP PREP RAILS

Compact countertop design brings refrigerated toppings and condiments conveniently to your customers, while occupying a minimal footprint.

CABINET CONSTRUCTION

Durable type 201 stainless steel construction.

Compact, countertop design with shallow depth requires minimal space and leaves counter room at the front of the unit.

REFRIGERATION SYSTEM

1/5 hp compressor uses R600a refrigerant. Operation requires a 115V electrical connection.

Cold wall design keeps food cold.

STORAGE

Includes (4) lids that fit 1/6 size food pans.

MODEL FEATURES

- Intuitive, easy to read pre-programmed manual controls.
- Operates in an ambient temperature up to 90°F.
- Foamed-in-place polyurethane insulation.
- Manual defrost system.
- (4) adjustable feet.

PROJECT: _____

MODEL: _____ SERIAL#: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

SPECIAL FEATURES

- Holds (2) 4" deep 1/6 pans and (2) 6" deep 1/6 pans (sold separately)
- Includes (4) clear lids that fit 1/6 size food pans
- Compact, countertop design gives customers easy access to condiments
- Maintains a temperature range from 33 to 40°F
- Durable type 201 stainless steel holds up to wear-and-tear
- Non-scratch feet will not leave marks on your countertop
- 115V, 1/5 hp



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Replacement



TECHNICAL DATA

Dimensions

Exterior Dimensions	15"W x 25 ⁷ / ₈ "D x 9 ¹ / ₈ "H
Capacity	(2) 4" deep ¹ / ₆ pans and (2) 6" deep ¹ / ₆ pans
Net Weight	44 lb.
Gross Weight	49 lb.
Packaging Dimensions	14 ³ / ₄ "W x 28 ¹ / ₄ "D x 15"H

Cooling

Temperature Range	33° - 40°F
Refrigerant	R600a
Max Ambient Temperature	90°F
Defrosting	Manual
Temperature Controller	Manual
Horsepower	¹ / ₅
BTU (BTU/HR)	457 BTU



Construction

Exterior Material	Type 201 Stainless Steel
Interior Material	Type 201 Stainless Steel
Insulation	Foamed-In-Place Polyurethane

Electrical

Voltage	110
Amps	1.4
Hz	60
Phase	1
Plug	NEMA 5-15p
Cord Length	118"

PLAN VIEW

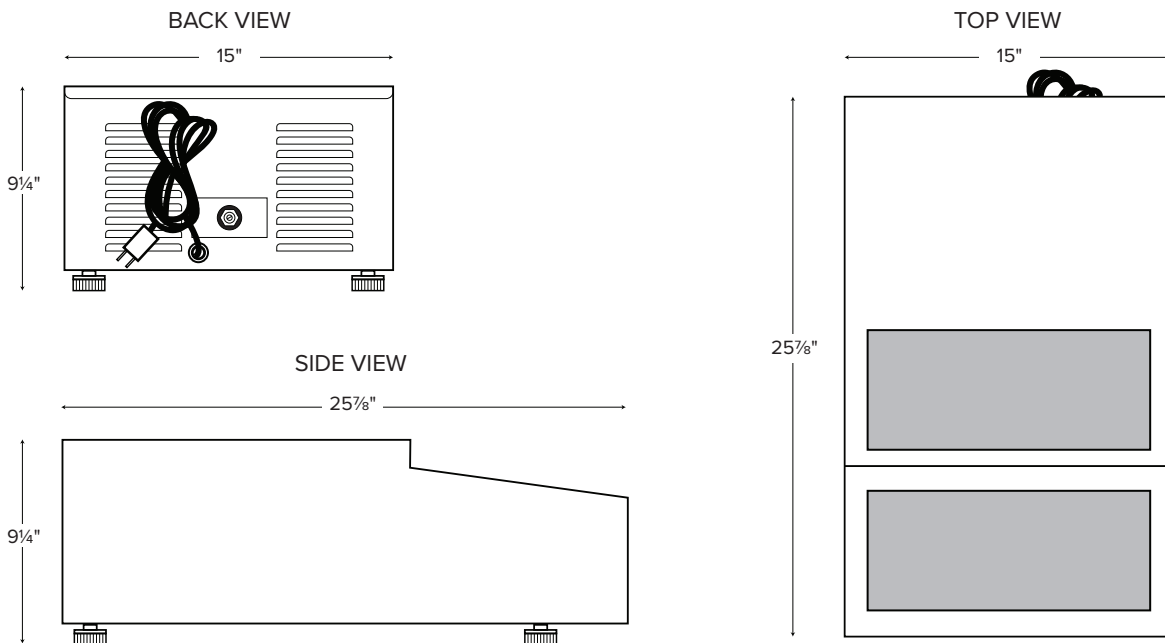

NEMA 5-15P