I I	BEVERAGE-AIR
-----	--------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

HR HORIZON TOP MOUNT REACH-IN

MODELS: HR1W-1S

HR1W Wide Solid Door Top Mount Reach-In Refrigerator



HR1W-1S

OPTIONS & ACCESSORIES

- ☐ Glass doors with locks
- Chrome shelves
- □ 3" Casters
- □ 6" Legs

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front and gray painted sides
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Field reversible doors are easily removed for service and cleaning
- Magnetic gasket attached to each door for positive seal
- Door lock
- Anti-microbial door handles
- Three (3) heavy duty epoxy coated wire shelves with four (4) shelf clips per shelf
- 6" Heavy-duty casters, two (2) with brakes
- Maintains product temperatures between 36 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R134a refrigerant to comply with all environmental concerns
- Unique down draft airflow system ensures uniform distribution throughout entire cabinet
- Automatic evaporation system for energy efficiency
- Epoxy coated evaporator coil


















MODEL	HR1W-1S
EXTERNAL DIMENSIONAL DATA	
Width Overall	35"
Depth Overall with Handle	33 5/8"
Height Overall with 6" Casters	84 1/2"
Number of Doors	1
Depth with Door Open 90 °	64 1/8"
Door Opening (in)	30 1/2" x 61 1/2"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	30.76
Internal Width Overall (in)	31"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	61 5/8"
Number of Shelves	3
ELECTRICAL DATA	
Full Load Amperes 115/60/1	5.8
REFRIGERATION DATA	
Horsepower	1/2
Capacity (BTU/Hr)*	2317
WEIGHT DATA	
Gross Weight	418 lbs
Height - Crated	88"
Width - Crated	37"
Depth - Crated	36"

Top Mount Reach-In Refrigerator

Model: HR1W-1S

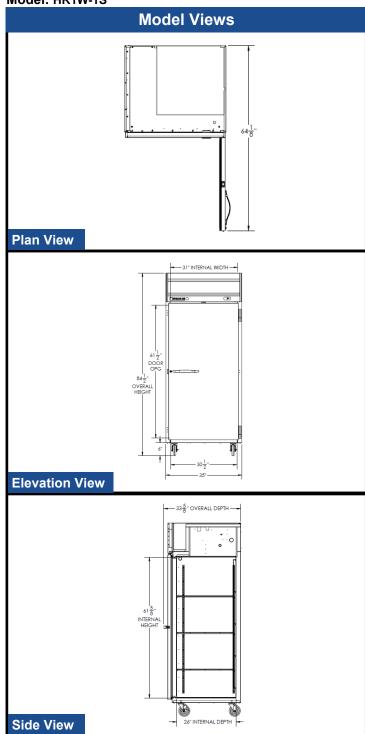

ELECTRICAL CONNECTION



















Units pre-wired at factory and include 8' long cord and plug set.



