MASTER-BILT® FUSION™ SERIES

ITEM NO. _____
PROJECT _____
LOCATION _____
DATE _____ QTY. _____

MBBC80

MBBC SERIES

Deep Well Horizontal Bottle Coolers

MODELS

- ❑ MBBC50
- ❑ MBBC65
- ❑ MBBC80
- ❑ MBBC95

FEATURES

CONSTRUCTION

- Stainless steel top
- Black vinyl coated steel finish on front, sides and back
- Galvanized steel interior walls, stainless steel floor with drain
- Stainless steel lids
- Standard removable cap catcher
- Integrated glass rail on rear top
- Easy glide sliding lids with locks
- Door openings have plastic breaker strips to reduce condensation
- Adjustable vinyl-coated dividers
- Adjustable temperature control
- Foamed-in-place with low ODP polyurethane insulation
- Wall thickness: 1 1/2"

REFRIGERATION

- Self-contained refrigeration system metered by capillary tube
- Front breathing compressor on right side
- Evaporator coils are mounted to back wall and are epoxy-coated to resist corrosion
- Evaporator coils feature multiple fan motors and blades for greater air flow
- Automatic defrost
- Condensate evaporator inside compressor housing
- Access to slide-out condensing unit behind front grille for easy cleaning and service
- Refrigerant: R-134a
- Temperature range: 34° to 38°F (1° to 3°C)

WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**

OPTIONS

- ❑ 4" plate casters

BID SPECIFICATIONS

Item no. MBBC_____. Provide _____ Deep Well Horizontal Bottle Cooler(s), Master-Bilt® model no. MBBC_____.

Bottle coolers will feature stainless steel top and black vinyl front, sides and back. Interior walls will be galvanized steel with stainless steel floor. Lids will be constructed of stainless steel and will be equipped with locks. Door openings will have plastic breaker strips to reduce condensation. Adjustable vinyl-coated dividers will also be standard.

The refrigeration system will be self-contained and use R-134a refrigerant. The temperature range will be 34° to 38°F (1° to 3°C). System will be equipped with coated evaporator coils and a condensate evaporator. Condensing unit will be slide-out type for easy cleaning and service.

Bottle cooler to have standard limited 3-year parts and labor warranty with additional 2-year on compressor part.

Bottle cooler to be UL, C-UL and ETL Sanitation listed.

MASTER-BILT® Refrigeration Solutions
908 Highway 15 North • New Albany, MS 38652
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

MASTER-BILT® FUSION™ SERIES

MBBC SERIES

DEEP WELL HORIZONTAL BOTTLE COOLERS

TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.) L	D	H	DIMENSIONS (mm) L	D	H	VOLTS	AMPS	UNIT H.P.	NO. OF DIVIDERS	NO. OF LIDS	CAPACITY 12 OZ. CANS/ 12 OZ. BOTTLES	SHIP CU. FT.	SHIP WT. (LB/KG)
MBBC50	50	26 1/2	33 1/2	1270	673	851	115	6.1	3/8	3	2	857/377	36.3	260/118
MBBC65	64 1/2	26 1/2	33 1/2	1638	673	851	115	6.1	3/8	4	2	1191/539	46.3	310/141
MBBC80	80 1/2	26 1/2	33 1/2	2045	673	851	115	6.1	3/8	5	3	1575/715	57.4	415/189
MBBC95	95	26 1/2	33 1/2	2413	673	851	115	6.1	3/8	6	3	1893/877	67.4	430/195



MBBC50 PLAN VIEW



MBBC50 ELEVATION VIEW



ALL MODELS SIDE VIEW

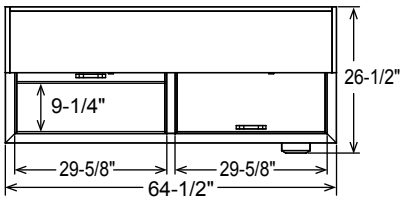

MBBC65 PLAN VIEW

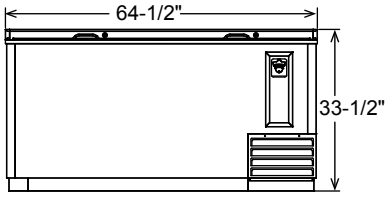

MBBC65 ELEVATION VIEW

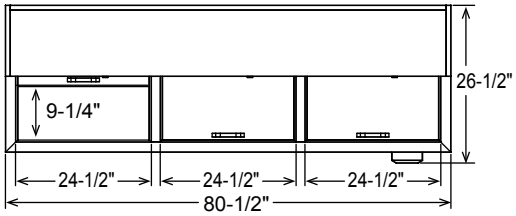

MBBC80 PLAN VIEW

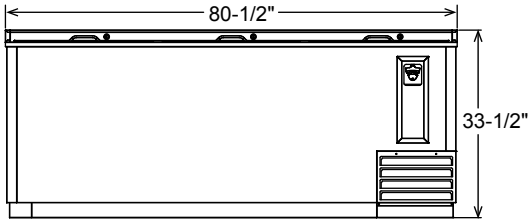

MBBC80 ELEVATION VIEW

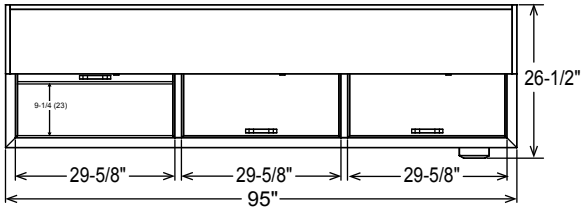

MBBC95 PLAN VIEW

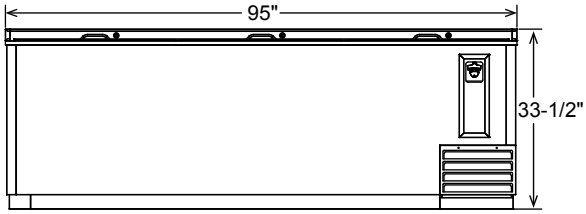

MBBC95 ELEVATION VIEW

LISTINGS

c UL us

Intertek

HOOKUP

All models via plug in, 8 foot long flexible three wire 16 gauge cord with molded plug.



NEMA 5-15P

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.

MASTER-BILT® Refrigeration Solutions

908 Highway 15 North • New Albany, MS 38652
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

Standex Food Service Equipment Group

1392-6/16-web

©2016 Master-Bilt Products, an unincorporated division of Standex International Corporation. All rights reserved. Printed in U.S.A.